

# Signatory Page

# Environmental Methane Compliance - Report of Findings Coffin Butte Landfill

Prepared by:	
Clay Syi	2.2.25
Clay Guzi, President/CEO	2-3-25 Date
GuziWest INSPECTION & CONSULTING	
Reviewed and approved by:	
Anleym Gioca	
Ashley Giesa, Senior Industrial Hygienist	2-4-2025 Date
GHD	
Reviewed and approved by:	
Jamara R. House-Knight	2 2 25
Tamara House-Knight Senior Toxicologist	2-3-25 Date
CHID	

# **Table of Contents**

I.	Introdu	ction1				
II.	Regulat	Regulatory Background				
III.	Landfill Gas Collection & Control System (GCCS)					
IV.	CBL M	ethane Monitoring and Regulatory Compliance Record Review				
V.	Potentia	al Health Effects of Methane, Carbon Dioxide, and Other Landfill Gases				
VI.	Conclus	sions and Recommendations10				
VII.	Referen	rces				
	ndix A	Figures Title V Operating Permit (Coffin Butte Landfill)				
	ndix C	Energyneering Solutions 2021 Gas Collection Control System Design Plan				
Appe	ndix D	Instantaneous and Integrated Monitoring Flowcharts				
Appe	ndix E	<b>Table 1 - Instantaneous &amp; Integrated Exceedances - Methane Surface Emissions</b>				
		Table 2 – Roseburg Landfill & CBL – Methane Exceedance Comparison				
Appe	ndix F	Roseburg Landfill Q2 2024 Surface Emissions Monitoring Report				
Appe	ndix G	Corrective Actions/System Expansion Documentation				

## I. Introduction

Guzi-West Inspection and Consulting, LLC (Guzi-West) was retained in May 2024 to provide environmental consulting services for the subject facility, Coffin Butte Landfill (CBL). CBL is located at 28972 Coffin Butte Road, Corvallis, OR 97330; see Figure 1, Appendix A. The CBL is owned and operated by Valley Landfills, Inc. (VLI). This report of findings presents the results of an independent review of the facility's management and permitting compliance of the landfill gas, methane, as well as if methane generation is likely to pose health concerns for the surrounding community. As explained in further detail below, our review focuses on monitoring events and corresponding reports from the third quarter of 2022 to the second quarter of 2024. Total methane production by the landfill and modeling of methane dispersement throughout the site and beyond are outside our scope of work. The report's findings, conclusions, and recommendations will not be submitted to regulatory agencies and/or other parties outside of VLI, unless Guzi-West is specifically authorized to do so by VLI. Guzi-West prepared the report in conjunction with GHD, a global, multidisciplinary professional services firm with expertise in the environmental, engineering, architecture, and design and construction fields. The Sections below present the air quality regulations governing the landfill; how the landfill controls, manages, and monitors methane and other landfill gases; the regulatory compliance record of CBL specific to methane; potential health effects of methane, carbon dioxide, and other landfill gases; and finally conclusions and recommendations. Again, this report primarily focuses on methane alone, but other landfill gases are briefly discussed where appropriate.

## II. Regulatory Background

The facility began accepting waste in 1978, has a design capacity of approximately 39.7 million tons, and a projected closure date of 2041. The subject facility is regulated under numerous regulatory permits and as such numerous Plans, Manuals, and Documents go into varying levels of details based upon their specific topics; the additional Plans, Manuals, and Documents are available under separate cover by request. The primary regulations specific to air quality and the subject scope of work are as follows: the Clean Air Act (CAA), the National Emission Standards for Hazardous Air Pollutants (NESHAPs), the New Source Performance Standards (NSPS), and the landfill gas emission requirements specified within Oregon Administrative Rules (OAR) Chapter 340, Division 239. Title V of the CAA requires each state to develop a comprehensive operating permit program for major industrial sources of air pollution. Oregon's Department of Environmental Quality (DEQ) is the governing body responsible for enforcing facilities subject to Title V within the state of Oregon. CBL is an active municipal solid waste landfill (MSWLF) operating under Oregon DEQ Title V Operating Permit No. 02-9502-TV-01. CBL's Title V Permit was issued October 30, 2009 and was set to expire October 1, 2014 but has been administratively extended by Oregon DEQ to date; a copy of the permit is provided in Appendix B. The facility's Title V Permit imposes emission limits and standards, testing, monitoring, and recordkeeping requirements specified under the CAA, NESHAPs, and NSPS.

On March 10<sup>th</sup>, 2020, Oregon Governor, Kate Brown, signed Executive Order No. 20-04 which directed state agencies to reduce and regulate greenhouse gas emissions. In an effort to meet the Governor's directive, the Oregon Environmental Quality Commission (EQC) and DEQ subsequently conducted a formal Landfill Gas Emissions rulemaking where they evaluated regulations in effect in neighboring states and their approaches to regulating and reducing greenhouse gas emissions. This led to the adoption of Oregon-specific landfill gas emission rules.

Guzi-West

CBL maintains greater than or equal to 200,000 tons of waste-in-place and as such is required to adhere to the emission limits and standards, testing, monitoring, and recordkeeping requirements specified within OAR Chapter 340 Division 239 (OAR 340-239), the conditions specified within OAR 340-239 are notably more stringent than federal regulations specified under the CAA, NESHAPs, and NSPS. Due to the increased requirements, CBL retained SCS Field Services (SCS-FS) in the Fall of 2022 to complete the required Surface Emissions Monitoring (SEM). As detailed in SCS-FS's quarterly reports and summarized immediately below, the following requirements are stricter than the NESHAP regulations and require additional compliance.

#### SURFACE EMISSION METHANE CONCENTRATION LIMITS

340-239-0200 (1) Surface Emission Methane Concentration Limits. Except as provided in OAR 340-239-0110(4), 340-239-0110(5), 340-239-0300, and 340-239-0600(1), beginning August 1, 2022, or upon commencing operation of a newly installed gas collection and control system or modification of an existing gas collection and control system pursuant to OAR 340-239-0110(1), whichever is later, no location on the landfill surface may exceed either of the following methane concentration limits:

- (a) 500 parts per million by volume (ppmv), other than nonrepeatable, momentary readings, as determined by instantaneous surface emissions monitoring conducted in accordance with OAR 340-239-0800(3)(b);
- (b) An average methane concentration limit of 25 ppmv as determined by integrated surface emissions monitoring conducted in accordance with OAR 340-239-800(3)(c).

The 500 ppmv limit is an existing requirement under Federal regulations, however the average methane concentration limit of 25 ppmv is unique to OAR 340-239.

#### SURFACE EMISSION RECORDKEEPING

340-239-0700 A landfill owner or operator subject to this division must maintain the following records for at least five years:

• 340-239-0700(2)(a)(C) All instantaneous surface readings of 100 ppmv methane or greater. All exceedances of the limits in OAR 340-239-0100(6)(b) and 340-239-0200, including the location of the leak (or affected grid), leak concentration in ppmv methane, date and time of measurement, the action taken to repair the leak, date of repair, any required remonitoring and the remonitored concentration in ppmv methane, wind speed during surface sampling, and the installation date and location of each well installed as part of a gas collection system expansion;

The Federal regulations only require monitored surface emissions over 500 ppmv to be documented, thus recordkeeping is now kept on emission points 100 ppmv or over. All repeatable instantaneous records of 100 ppmv or higher (taken during SEM) must be kept for 5 years AND recorded in the semi-annual reports.

Guzi-West's compliance review for the subject facility is presented in Section IV and focuses on CBL's compliance record when the more stringent rules under OAR 340-239 became effective in the third quarter of 2022.

## III. Landfill Gas Collection & Control System (GCCS)

All municipal waste landfills produce landfill gases and must utilize engineering controls to manage and control their production. Typically, landfill gases comprise a mixture of methane 45%-60% and carbon dioxide 40%-60% by volume. Common contaminant gases and the processes by which they are generated include:

- methane generated from the decomposition of organic materials by bacterial action under anaerobic conditions;
- carbon dioxide typically generated by oxidation of methane in aerobic layers surrounding the landfill;
- other gases, including sulphur dioxide, helium, hydrogen, and gaseous alkanes and alkenes associated with wastes and degradation products within the landfill;
- and organic vapours associated with the presence of petroleum and other hydrocarbon products.

CBL maintains landfill gases (LFG) via the utilization of a gas collection and control system (GCCS). A new GCCS Design Plan was prepared by Energyneering Solutions and submitted to CBL on December 9, 2021 in order to meet new requirements specified within OAR 340-239. A copy of the Plan is included in Appendix C, and the description presented herein is based upon the information presented within the Plan. Generally speaking, a network of extraction wells and vertical and horizontal piping are utilized to capture LFG and route it to the nearby electrical generation plant owned and operated by the Pacific Northwest Generating Cooperative (PNGC); see Figure 2, Appendix A. A Master Design Plan exists for the facility's GCCS in order to accommodate placement of additional components as additional waste is placed into new landfill cells, see Appendix C.

The operation of CBL's GCCS has been designed in accordance with 340-239-0110(1)(c)(C) in order to handle the maximum expected gas flow rate from the entire area of the landfill that warrants control over the intended use period of the gas control or treatment system equipment. Because CBL already had an established GCCS, it was capable of calculating the actual maximum gas flow rate using the equation from 40 CFR 60.755(a)(1)(ii). The maximum expected LFG flow rate for the site was used for sizing the GCCS. The LFG generation rate calculations were performed using the United States Environmental Protection Agency (EPA) Landfill Gas Emission Model (LandGEM) (values - k=0.04/year and L0=80 m3/Mg), historical waste receipts and the permitted design capacity of the facility. The maximum LFG generation rate is projected to be approximately 6900 standard cubic feet per minute (SCFM). The LandGEM emissions model is a design tool which uses the information available to project future operating conditions. This model was developed based upon operating conditions at a cross-section of landfills within the United States and is approved for use by the EPA. Actual operating parameters may dictate changes in the system flow characteristics and process equipment as the system is developed. The LandGEM model meets the requirements of OAR 340-239-0110(2).

As of 2021, the GCCS specifically consisted of 312 active vertical extraction wells and horizontal collectors that each adhere to a 55 feet minimum depth and 15 feet minimum spacing between wells. The GCCS includes LFG piping capable of maintaining an adequate vacuum even under maximum load of gases, trenching & sloping that consists of a 3% grade to ensure proper drainage of liquids towards the landfill, and wellheads equipped with positive closing throttle valves, and two sampling ports to measure oxygen and nitrogen concentrations. All aspects of the GCCS have

Guzi-West

been constructed using PVC, high density polyethylene (HDPE) pipe, fiberglass, corrosion resistant steel, neoprene gaskets, and other non-porous corrosion resistant materials. Condensate that forms in the GCCS piping is discharged to the leachate collection system (LCS) via direct connections to LCS clean/access riser or to condensate pump stations located around the perimeter of the disposal area. Condensates are disposed of with landfill leachate in accordance with the requirements of the facility Solid Waste Permit. Again, collected LFG is directed to an electrical generation plant owned and operated by the Pacific Northwest Generating Cooperative (PNGC) which consists of three 3516 Caterpillar engines and two 3520 Caterpillar engines; the engines are respectively capable of combusting approximately 287 SCFM and 527 SCFM each. PNGC's system also includes two backup utility flares to handle excess LFG totaling 3,000 SCFM. Essentially, LFG is captured by the GCCS and routed to the PNCG power plant where it's utilized to generate power; excess LFG, if present, is routed to the facility utility flares. Flare exhaust and LFG flow rates are continuously monitored using a thermocouple installed at the flare tip and an orifice plate along LFG pipes downstream of the flare system in accordance with OAR 340-239-0110 (2)(c)(A)(ii)(I).

## IV. <u>CBL Methane Monitoring and Regulatory Compliance Record Review</u>

CBL is required to adhere to the Clean Air Act (CAA), the National Emission Standards for Hazardous Air Pollutants (NESHAPs), the New Source Performance Standards (NSPS), and the landfill gas emission requirements specified within OAR 340-239. The most stringent standards must be adhered to and at this time the conditions specified within OAR 340-239 are equally or more stringent than the conditions specified in the CAA, NESHAPs, and the NSPS. OAR 340-239 references three primary types of surface emission measurements for methane: instantaneous, integrated, and pressurized piping and/or components. Instantaneous measurements are collected at a specific location and time, while integrated measurements are averages of several measurements across an area or grid. Concentration limits for instantaneous and integrated measurements are specified within OAR 340-239 where additional monitoring requirements and corresponding corrective actions are imposed based upon exceedances of the established limits. The flowchart presented in Appendix D depicts how exceedances over given limits trigger additional follow-up monitoring, tighter monitoring grids, and requirements for GCCS system expansion if the follow-up monitoring identifies remaining exceedances. For instance, should any measurements from instantaneous or integrated routine monitoring be in exceedance of the instantaneous methane limit of 500 ppmv and/or the integrated methane limit of 25 ppmv, the first re-monitoring event must occur 10-days from the initial exceedance. If the first re-monitoring event finds a second exceedance over the 500 ppmv or 25 ppmv threshholds, a second remonitoring must be performed within 10 days. If the second re-monitoring identifies exceedances over the 25 ppmv integrated threshholds, GCCS system expansion must be performed no later than 120 days after the date the third exceedance was identified. Instantaneous exceedances are remonitored in an initial 10-day monitoring period, 2<sup>nd</sup> 10-day monitoring period, as well as a 1month follow-up monitoring period; GCCS system expansion must be performed no later than 120 days after the date the fourth exceedance was identified. Similarly, GCCS pressurized piping and/or components containing landfill gas under positive pressure must also be monitored for leaks. If a component leak is found exceeding 500 ppmv methane, it must be tagged and repaired within 10 days. The flowchart provided in Appendix D identifies additional requirements/actions for methane concentrations found between 100-499 ppmv, <100 ppmv. <25 ppmv and provides a visual representation of the instantaneous and integrated monitoring process.

Guzi-West Exhibit 39

Page 7 of 249

As previously noted, Surface Emissions Monitoring (SEM) at CBL is conducted by SCS Field Services (SCS-FS) and in accordance with OAR 340-239 requirements. Per SCS-FS documentation, the subject facility is divided into a grid of 105 separate 50,000 square foot areas; see Figure 3, Appendix A for an aerial photograph of the landfill with an overlay of the 105 separate grids. Surface emissions readings are recorded every five seconds while SCS-FS personnel walk monitoring pathways through the 105 grids. Meanwhile, instantaneous measurements are collected from cracks, holes, and other cover penetrations in the surface. Any instantaneous measurements exceeding the 100 or 500 ppmv standards (reporting and compliance levels, respectively) are GPS tagged and stake-marked for onsite personnel to perform remediation or repairs. The integrated averages for each grid are based on the readings collected every 5 seconds and stored on the instrument. The readings are downloaded, and the averages calculated for each grid using SCS eTools®. The most recent SCS-FS quarterly SEM report (Q2 2024) specifies monitoring is being performed on 25-foot pathways based on a prior inspection, in which exceedances were observed. As stipulated in OAR, if uncorrectable exceedances within the 10day limitation are detected or emissions are discovered during an inspection by Regulatory Agencies, the landfill must perform monitoring on a 25-foot pathway on a quarterly basis for active disposal sites. Upon completion of four consecutive SEM events without an uncorrectable exceedance of the 25 ppmv or 500 ppmv standards, other than non-repeatable momentary readings, the landfill may perform the quarterly monitoring on a 100-foot spacing. Figure 4, Appendix A, depicts the monitoring pathway utilized by SCS-FS during the most recent field monitoring events conducted on June 11, 16, 18, 24, 26, and July 6, 16, and 26, 2024. The monitoring equipment includes a Thermo Scientific TVA 2020 Portable Flame Ionization Detector (FID) and a Weather Anemometer. The FID measures airborne methane between 1-50,000 ppmv and is calibrated in accordance with EPA Method 21. The Weather Anemometer records the weather conditions onsite, ensuring accurate measurement conditions (monitoring cannot be performed in wind exceeding 10mph or rain). To collect measurements, the FID inlet is held within 2 inches of the landfill surface while walking the grid in parallel paths. During monitoring for the pressurized pipe and components, the FID inlet is held a half inch from the component. Instantaneous monitoring results are recorded onsite if a reading above the 100 ppmv reporting threshold or the 500 ppmv compliance threshold is noted. Again, integrated monitoring results are calculated from the measurements collected every five seconds while SCS-FS traverses monitoring paths within each established grid; the measurements are stored on the FID and subsequently averaged to determine an integrated average for each of the 105 grids. The compliance summary presented below focuses on CBL's compliance record when the more stringent rules under OAR 340-239 became effective in the third quarter of 2022. Table 1, Appendix E, identifies the monitoring period, instantaneous, integrated, and pressurized piping and/or component monitoring results broken down by 'initial', '1st 10-day re-monitoring', '2nd 10-day re-monitoring', '1-month re-monitoring' (instantaneous only), as well as any notes made during Guzi-West's review.

Monitoring and determining compliance for an active landfill is uniquely challenging in that new material is constantly being added, settling, and decaying, which results in the generation of increasing amounts of landfill gas. OAR 340-239 appears to provide a structure for more frequent and stringent monitoring of landfill gas generation where initial exceedances are warning signs that trigger tighter monitoring pathways, frequency, recordkeeping, etc. Close follow-up is required for re-monitoring to determine if the landfill was able to implement corrective actions to reduce the initial exceedance below regulatory thresholds. In the event the exceedances remain above the thresholds for consecutive monitoring events, then corrective actions, ultimately involving system expansion, must be implemented. Thus, exceedances appear to be a relatively

expected outcome when operating an active municipal solid waste landfill. In our interpretation, the goal of OAR 340-239 is to cumulatively reduce landfill gas generation within the State of Oregon, thereby reducing greenhouse gas emissions within the state, by requiring landfill operators to more closely monitor and manage landfill gas generation. In that sense, we expect CBL's 'compliance' to be measured as much by the implementation of corresponding corrective actions after an exceedance, as by the record of compliance/exceedance of emission measurements alone.

As depicted on Table 1, Appendix E, eight individual quarters were evaluated for CBL during our review (Q3 2022 – Q2 2024) and instantaneous and/or integrated exceedances were identified in each of the eight quarterly monitoring events. Five quarters had individual exceedances which remained above regulatory threshold from the initial monitoring, 1<sup>st</sup> 10-day re-monitoring, 2<sup>nd</sup> 10-day re-monitoring, and 1-month re-monitoring events thereby requiring system expansion. Six quarters had integrated exceedances which remained above regulatory threshold from the initial monitoring, 1<sup>st</sup> 10-day re-monitoring, and the 2<sup>nd</sup> 10-day re-monitoring events thereby requiring system expansion. CBL, in turn, performed gas collection and control system expansions within 120 days following each individual and/or integrated exceedance during the subject review period (Q3 2022 – Q2 2024).

Due to the previously mentioned challenge of assessing landfill gas production for an active landfill, Guzi-West felt comparisons to other Oregon landfills would give the best representation of if CBL's methane exceedances and accompanying corrective actions were typical in the industry or not. Guzi-West submitted a freedom of information act request to the Oregon DEQ on October 31, 2024 for quarterly SEM reports from the third quarter of 2022 to the second quarter of 2024 for the Columbia Ridge, Knott, and Roseburg Landfills; all of which are representative landfills for comparison. Initially, a single quarterly SEM report was provided for O2 2024 for the Roseburg Landfill; all other reports provided were annual and semi-annual summary reports. Unfortunately, the annual and semi-annual reports do not contain the level of detail quarterly reports do and thus statistical comparisons were generally not possible. Specifically, the annual and semi-annual reports do not include, and are not required to, the total number of integrated and instantaneous measurements for a given monitoring event, definitions for single measurements, etc. (i.e. the reports typically provide summaries of the number of total exceedances, but not how many overall measurements were collected for a given monitoring event where statistical analyses could be calculated and compared between landfills). Guzi-West made numerous additional requests for quarterly reports for the additional landfills; ultimately, Oregon DEO Air Quality Permit Coordinator, Cynthia Ferris, explained that, "Generally, the SEM reports are hidden within the annual and semi-annual reports. We don't receive separate reports from the facilities each quarter. The permit only requires reporting of instantaneous surface methane readings greater than 100 ppm (Condition 51.a.i) and says nothing of reporting the integrated measurements, so we may not have that information, but the source is required to keep those records." Essentially, what is contained in the annual and semi-annual reports is all that is required to be kept by Oregon DEQ and by extension all that can be requested from them. Nevertheless, the one quarterly SEM report that was provided was the Q2 2024 report from the Roseburg Landfill does provide a direct comparison for a randomly selected snapshot in time; a copy of the report is provided in Appendix F. Both CBL and Roseburg Landfill are municipal solid waste landfills, with Roseburg Landfill being roughly a fifth of the size of CBL. Further, SCS Engineers performs the surface emissions monitoring at the Roseburg Landfill, the same firm that performs surface emissions monitoring for CBL, making it ideal for comparison as similar or identical equipment, employees, and standard operating procedures were utilized. We recognize and acknowledge comparison of a single

Guzi-West

quarterly event is insufficient to determine compliance over time between the two facilities; however, the goal of making the comparison is to gauge what is typical in the industry. Even comparison of a single monitoring event can provide the general public, report readers, and CBL staff a valuable assessment of how CBL compares against industry peers. It should be noted the EPA collected instantaneous measurements for the CBL during the second quarter of 2024, but did not for the Roseburg Landfill. The most representative method of comparing the landfills is to utilize data only collected by SCS-FS due to the reasons specified above regarding the same employees, standard operating procedures, etc.; regardless, the data is presented and analyzed both including and excluding the EPA data. As shown in Table 2, Appendix E, 63% of the instantaneous measurements collected from the Roseburg Landfill exceeded the 500 ppmv methane limit in the initial monitoring event (12 of the 19 instantaneous measurements) compared to 56% of the CBL for the same period (22 of the 39 instantaneous measurements). If the EPA measurements are included for CBL, 78% of the instantaneous measurements exceeded the 500 ppm methane limit (63 of the 80 measurements). The Roseburg Landfill did not have any exceedances of the integrated methane limit, 25 ppm, and 42 grids were monitored out of the total 54 grids present. Grids are not monitored, or required to be, if active landfill operations are occurring in a given grid. Meanwhile, 7% of the CBL integrated grids monitored exceeded the integrated methane limit (3 of the 42 grids monitored). No integrated measurements were collected/calculated by the EPA.

The second component analyzed was how quickly were the instantaneous and integrated exceedances able to be corrected by either facility. The Roseburg Landfill was able to implement corrective actions wherein the first 10-day re-monitoring event showed no exceedances of the instantaneous limit remained; CBL was unable to implement successful corrective actions for 16 of the 17 instantaneous exceedances and system expansion was required in those areas. CBL was able to implement corrective actions for the integrated exceedances and all 3 integrated exceedances returned to below methane limits within the first 10-day monitoring event. Generally speaking, the number of exceedances between the two facilities is comparable, while the Roseburg Landfill was able to implement corrective actions more quickly to resolve the issues identified in the instantaneous exceedances. CBL was able to implement corrective actions to resolve the exceedances of the integrated limit, but the instantaneous exceedances identified led to the expansion of the gas collection and control system as corrective actions were unable to be implemented within one month. In summary, we expect this comparison to be typical of the industry where some landfills will have more exceedances than others in given quarters; corrective actions will be quickly and easily implemented for some areas where exceedances are required while other exceedances will identify areas wherein system expansion is required. Our interpretation remains that the regulation, by design, is meant to encourage continuous adaptive solutions to identified problems as the need arises. The triggers for re-monitoring and eventually system expansion are in place to allow a facility to attempt to rectify exceedances with small scale solutions until it becomes apparent that the system itself needs additional resources to handle the amount of gas that the landfill is producing. The purpose of the regulation is not to prevent exceedances, it is to use the identification of exceedances as a guide to address the facility's gas collection and control needs.

Guzi-West Exhibit 39
Page 10 of 249

# V. <u>Potential Health Effects of Methane, Carbon Dioxide, and Other Landfill Gases</u>

CBL requested Guzi-West objectively review the site's generation of the landfill gas, methane, and any potential health effects it could pose to the community surrounding the facility. Presented below is a discussion of the typical health effects associated with landfill gases, regulatory limits and health-based goals for the primary landfill gases (methane and carbon dioxide), the exposure paths landfill gases typically follow, and finally an evaluation of the subject facility's potential impacts to the community.

The primary gases produced by a landfill are methane and carbon dioxide making up 99%, or greater, of gases typically produced. In addition to methane and carbon dioxide, landfill gases can also contain trace amounts of other gases, including volatile organic compounds (VOCs) and hazardous air pollutants. According to the Agency for Toxic Substances & Disease Registry (ATSDR) (a federal public health agency of the U.S. Department of Health and Human Services), the short-term and long-term effects associated with landfill gases can include the following:

#### 1. Short-Term Effects:

- Odors: Unpleasant odors from sulfur compounds can cause headaches, nasal congestion, eye, nose, and throat irritation, cough, and nausea.
- o Respiratory Issues: Exposure to landfill gas can exacerbate asthma and other respiratory conditions.
- o Direct Exposure: People living near landfills may experience skin irritation or dermatitis from contact with contaminated soil or water.
- o Eye Irritation: Gases like H<sub>2</sub>S can cause eye irritation, redness, and watering.

### 2. Long-Term Effects:

- o Mental Health: Persistent odors and health concerns can lead to stress and anxiety among community members.
- O Carcinogenic Risks: Though they are normally only present in landfill gas in small quantities and therefore unlikely to cause any community health effects, it is well known that VOCs such as benzene and other non-methane organic compounds pose a carcinogenic hazard to human health.
- o Chronic Exposure: Prolonged exposure to low levels of certain VOCs can lead to more serious neurological effects, including cognitive impairments.

Methane and carbon dioxide are both classified as simple asphyxiants meaning that, within enclosed areas, either gas can build up and displace oxygen creating an oxygen deficient atmosphere. Further, methane is considered a flammable gas while carbon dioxide is not. Regulatory limits and health-based values for both gases are discussed immediately below. The Occupational Safety and Health Administration (OSHA) defines an oxygen deficient atmosphere as an oxygen content below 19.5% by volume. OSHA has not established a Permissible Exposure

Limit (PEL) for methane; however, OR-OSHA has an established methane PEL of 1,000 parts per million (ppm) when evaluated as an 8-hour time weighted average, a 30-minute excursion limit of 3,000 ppm (3x the PEL), and a ceiling limit of 5,000 ppm (5x the PEL). Federal OSHA and OR-OSHA have established the same PEL for carbon dioxide at 5,000 ppm (0.5% CO2 in air) averaged over an 8-hour workday, and OR-OSHA has further established 15,000 ppm as a 30-minute excursion limit (3x the PEL), and a ceiling limit of 25,000 ppm (5x the PEL). Per the National Institute for Occupational Safety and Health (NIOSH), methane is considered a flammable gas with a lower explosive limit (LEL) of 5% by volume and an upper explosive limit (UEL) of 15% by volume. NIOSH has established health-based immediately dangerous to life or health (IDLH) values which are set at 10% of the LEL for specific air contaminants, including methane, because the explosive hazards are deemed a greater risk; the IDLH for methane is 5,000 ppm (10% of the LEL for methane, which is 50,000 ppm). Carbon dioxide has an established IDLH of 40,000 ppm.

There are generally considered two main exposure paths that landfill gases can take to affect community health:

- 1. **Subsurface Migration**: Gases can move through the soil and enter structures or utility corridors adjacent to the landfill. These exposure routes can be mitigated and reduced by appropriate design of landfill gas collection systems and equipment as well as regular air quality monitoring. The 2021 Gas Collection and Control System Design Plan prepared by Energyneering Solutions (Appendix C) depicts and describes how landfill gases are captured, monitored, and reported in detail.
- 2. **Ambient Air**: Gases can migrate from the landfill surface into the surrounding air, carried by the wind. Figure 5, Appendix A, identifies the parcels owned by CBL, as well as parcels of surrounding property owners.

Subsurface migration of methane is a well-known concern for landfill facilities; again, the facility's gas collection and control system (Appendix C) addresses the engineering design for collection of landfill gases facility-wide, specifies how subsurface methane migration is monitored and reported, and identifies future expansion of the system. Each month CBL personnel measure methane concentrations down to 0.1% in six landfill gas probes installed in-ground to monitor any subsurface migration of landfill gases. As depicted in Figure 6, Appendix A, the sub surface gas probes are located along the south-southwestern portion of the landfill wherein CBL has gas and leachate collection lines are routed throughout the landfill to the PNGC power facility. No other power lines or other public utilities are present within the footprint of the CBL facility (i.e. the only subsurface utilities on-site are those associated with CBL's landfill gas and leachate collection system). In addition to the probe monitoring, each month CBL personnel measure methane concentrations down to 0.1% in the interiors of eight site buildings and structures owned and utilized by CBL. The monitoring results for landfill gas monitoring, including those associated with landfill gas probes around the perimeter of the landfill, are reported annually in the facility's Annual Environmental Monitoring Report. Based upon electronic records from 2006 to 2023, as well as an anecdotal information provided by Ian Macnab, CBL Environmental Manager, methane has not been detected in any monthly monitoring event within the six probes, nor within the interiors of the eight buildings and structures since at least 2006. Records prior to 2006 were not reviewed.

The second potential route of community exposure is migration through ambient air wherein landfill gases can escape from the landfill surface and be carried by the wind into the community.

This appears to be a significant concern in the community based upon local reporting where references to instantaneous measurements with concentrations exceeding 100,000 ppm have been identified on-site. Evaluating potential community impacts with instantaneous readings is inferior in our opinion to utilizing integrated readings. Instantaneous readings are typically collected from a given area of concern (i.e. a hole in a landfill liner, below temporary tarps and cover, etc.) and represent 'hot spots' wherein measurements are collected to determine if immediate corrective actions are required. This is demonstrated in the previously referenced CBL O2 2024 SEM report where the EPA identified a methane concentration of 118,265 ppm in an instantaneous reading collected on June 26, 2024, from location A20 (this measurement is the highest single measurement ever identified from Q3 2022 to Q2 2024). As required by OAR 340-239, the same location was subsequently remeasured on July 6, 2024, following implementation of corrective actions and a methane concentration of 27 ppm identified. Similarly, the EPA identified 41 instantaneous readings above 500 ppm in their June 26, 2024 field inspection, all but 2 of those locations had fallen below 500 ppm when remeasured on July 6, 2024. In contrast, the integrated monitoring utilizes 105 separate grids divided evenly across the landfill, and methane measurements are automatically collected every five seconds with an FID as field personnel systematically traverse across the defined grids collecting measurements within 2-inches of the landfill surface. Averages are then calculated for each grid utilizing thousands of individual methane measurements and each grid average then compared against the 25 ppmv methane limit. By averaging thousands of measurements, the high measurements are still included but their significance can be seen as a whole for the entire grid, as well as for the landfill as a whole. For these reasons we believe the integrated monitoring measurements are the superior data set to evaluate the landfill's cumulative methane generation and potential impacts to the community. The modeling of landfill gas migration is beyond our scope of work; however, landfill gases are well known to dissipate in ambient air the further away one travels from the landfill/source. Therefore, to provide a general understanding of the likelihood of impacts to the community, Guzi-West identified the highest integrated methane level identified for a given grid to date and subsequently compared that grid to the regulatory limits and health-based goals in order to provide a worst case scenario analysis specific to methane. That is, comparing the highest integrated methane concentrations identified on-site provides a worst-case scenario analysis as the concentrations are known to dissipate in ambient air as you move away from the landfill itself and toward the property boundary and the surrounding community. Since integrated monitoring began to be required under OAR 340-239 (third quarter of 2022), the highest average measurement for any single grid was 217.64 ppmv as measured during the second quarter of 2023; this is 4.5 times below the OR-OSHA PEL for methane (1,000 ppm), 22 times below the IDLH for methane (5,000 ppm), and 229 times below the lower explosive limit for methane (50,000 ppm).

# VI. Conclusions and Recommendations

Guzi-West's scope of work focused on evaluating the subject facility's permitting compliance specific to the landfill gas, methane, in addition to evaluating if methane gas production from the facility is posing a health risk to the surrounding community. Our evaluation was done against the backdrop of a relatively newly implemented Oregon rule (OAR 340-239), which imposed more stringent requirements specific to landfills and methane production, monitoring, recordkeeping and reporting. As previously mentioned, monitoring and determining compliance for an active landfill is uniquely challenging in that new material is constantly being added, settling, and decaying, resulting in the generation of increasing amounts of landfill gas. Eight consecutive

quarterly reports were reviewed for the subject site starting in quarter three of 2022 and ending in quarter two of 2024; CBL had repeated individual exceedances in five quarters and repeated integrated exceedances in six quarters, which collectively triggered corrective actions and/or system expansion to be performed. As required by OAR 340-239, CBL implemented corrective actions within 120 days for each area wherein exceedances were identified. Guzi-West felt comparisons to other Oregon landfills would give the best representation of if CBL's methane exceedances and accompanying corrective actions were typical in the industry or not. Although obtaining quarterly reports for numerous landfills for the same monitoring period proved impossible, a quarterly SEM report from Roseburg Landfill was able to be obtained and provided a direct comparison for a representative facility. The number of exceedances between the two facilities was comparable, while the Roseburg Landfill was able to implement corrective actions more quickly to resolve the issues identified in the instantaneous exceedances for the subject monitoring period. In the end, we anticipate this comparison to be typical of the industry wherein some landfills will have more exceedances than others in given quarters; corrective actions will be quickly and easily implemented for some areas where exceedances are required while other exceedances will identify areas wherein system expansion is required. Our interpretation remains that the purpose of the regulation is not to prevent exceedances, it is to use the identification of exceedances as a guide to address the facility's gas collection and control needs. CBL is operating in compliance with OAR 340-239, and we expect their monitoring, reporting, and overall compliance record to be similar to that of their industry peers.

In the evaluation of landfill gases and potential impacts to the community surrounding the CBL facility, Guzi-West first assessed the potential exposure pathways landfill gases could follow. No measurable methane concentrations have been identified migrating in the subsurface since at least 2006 in the closest and most likely areas where landfill gases would be expected to migrate. Therefore, we conclude it is very unlikely subsurface migration of landfill gases is occurring and potentially impacting the surrounding community. A methane concentration of 100,000 ppm or greater was identified at the facility and is well above the lower explosive limit for methane (50,000 ppm), however re-monitoring of the same location following implementation of corrective actions resulted in a concentration of 27 ppm. These measurements were taken during instantaneous monitoring which, while useful for identifying precise locations of methane release, is not representative of the broader system, a metric that integrated monitoring captures more accurately. Further, methane and carbon dioxide can cause potential hazards within confined spaces (either due to the creation of an oxygen deficient atmosphere, and/or in the case of methane, due to the creation of an explosive risk); that said, neither gas is expected to pose asphyxiation or explosive concerns in ambient air to the community surrounding CBL. This opinion is largely based upon the results of the integrated monitoring conducted at the subject facility, which began to be required under OAR 340-239 at the start of the third quarter of 2022. The highest average methane emission for any single CBL grid was 217.64 ppm measured during the second quarter of 2023; this is 4.5 times below the OR-OSHA PEL for methane (1,000 ppm), 22 times below the IDLH for methane (5,000 ppm), and 229 times below the lower explosive limit for methane (50,000 ppm). This risk is further reduced in ambient air the farther one travels away from the landfill. In conclusion, it doesn't appear methane or carbon dioxide are likely to be present at concentrations that pose any immediate health concerns to the surrounding community. Community concerns regarding increasing greenhouse gas emissions from landfills and all sources is outside the scope of this project.


Although OAR 340-239 does not specifically require mapping and a detailed description of what the system expansion consisted of, we recommend CBL personnel keep a log of the components making up the system expansion, implementation date/s, along with mapping of what was added. Appendix G serves as a placeholder for this documentation. We recommend CBL consider implementation/expansion of continuous air monitoring devices around the property boundary to monitor and guide corrective actions on-site in regards to air quality, as well as to demonstrate to the local community CBL's commitment to continuous compliance with applicable air quality regulations. This, along with consistent community engagement. appear to be the key in developing/re-establishing community trust, and showing that CBL is now, and will continue to operate within compliance of all regulatory permits at the site.

## VII. References

- Oregon Department of Environmental Quality, Chapter 340 Division 239 Landfill Gas Emissions, Oregon Secretary of State Website, Oregon State Government, https://secure.sos.state.or.us/oard/displayDivisionRules.action;JSESSIONID\_OARD=vL BhHxWySNDU4cA9c9f3TBy7UG2rlPassQ563SVBaem2TLpUJavH!-211748414?selectedDivision=6533
- 2. The Agency for Toxic Substances & Disease Registry 2001, ATSDR Website, U.S. Health and Human Services Department, U.S. Government, accessed 9/25/2024, <a href="https://www.atsdr.cdc.gov/HAC/landfill/html/intro.html">https://www.atsdr.cdc.gov/HAC/landfill/html/intro.html</a>
- 3. The National Institute for Occupational Safety and Health (NIOSH) Pocket Guide to Chemical Hazards, NIOSH website, U.S. Centers for Disease Control (CDC), U.S. Government, accessed 9/25/2024, https://www.cdc.gov/niosh/npg/default.html
- SCS Field Services, Oregon Landfill Gas Emissions Rule (OAR) and Surface Emissions Monitoring Q3 & Q4 2022, Q1, Q2, Q3, & Q4 2023, Q1 & Q2 2024, Coffin Butte Landfill. 1/6/2023, 1/23/2023, 5/19/2023, 8/17/2023, 11/15/2023, 1/16/2024, 5/15/2024, 8/19/2024
- 5. Energyneering Solutions, 2021 Gas Collection and Control System Design Plan, Coffin Butte Landfill. 12/9/2021
- 6. Ian Macnab, Republic Services Coffin Butte Landfill Environmental Manager, personal communication, 11/13/2024

# **APPENDIX A**

Figures
Exhibit 39
Page 16 of 249

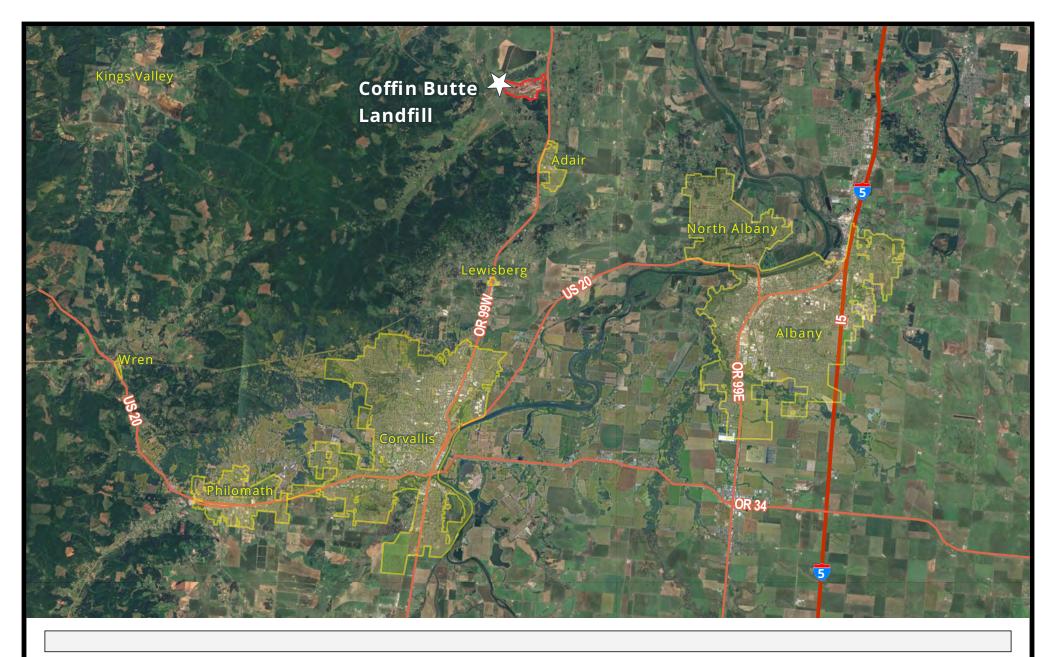


2 mi

NOT TO SCALE - FOR APPROXIMATION ONLY Datum: North American Datum 1983 Projection: StatePlane California I

FIPS 0401 Feet

Cartographer: Taylor Bradley

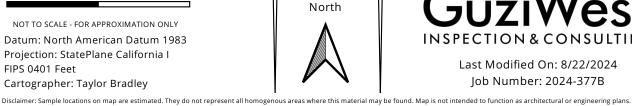

# GuziWest INSPECTION & CONSULTING

Last Modified On: 8/22/2024 Job Number: 2024-377B

# Figure 1 - Vicinity Map

Coffin Butte Landfill 28972 Coffin Butte Road Corvallis, OR 97330 **Exhibit 39** 

Page 17 of 249



0 400 800 1,200 Feet

NOT TO SCALE - FOR APPROXIMATION ONLY

Datum: North American Datum 1983 Projection: StatePlane California I

FIPS 0401 Feet

Cartographer: Taylor Bradley



GuziWest INSPECTION & CONSULTING

> Last Modified On: 9/18/2024 Job Number: 2024-377B

# Figure 2 - Proximity to Power Station

Coffin Butte Landfill 28972 Coffin Butte Road Corvallis, OR 97330 **Exhibit 39** 

Disclaimer: Sample locations on map are estimated. They do not represent all homogenous areas where this material may be found. Map is not intended to function as architectural or engineering plans.



Originial map created by:

SCS - Field Services

Original map name: Surface Emissions

Monitoring Site Grid Map




Last Modified On: 9/19/2024 Job Number: 2024-377B

# Figure 3 - SCS Monitoring Grid Map

Coffin Butte Landfill
28972 Coffin Butte Road, Corvallis, OR 97330
Exhibit 39

Page 19 of 249

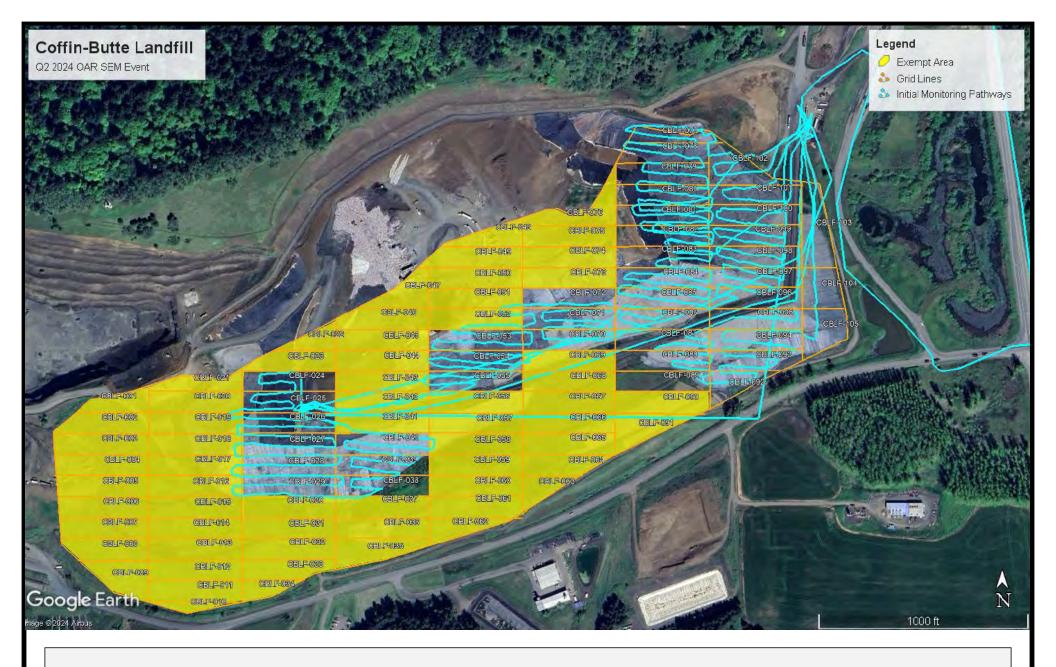

Originial map created by:

SCS - Field Services

Original map name: Second Quarter 2024
Initial Surface Emissions Monitoring Pathway


# GuziWest INSPECTION & CONSULTING

Last Modified On: 9/19/2024 Job Number: 2024-377B

# Figure 4 - SCS Emission Monitoring Pathway

Coffin Butte Landfill
28972 Coffin Butte Road, Corvallis, OR 97330
Exhibit 39

Page 20 of 249

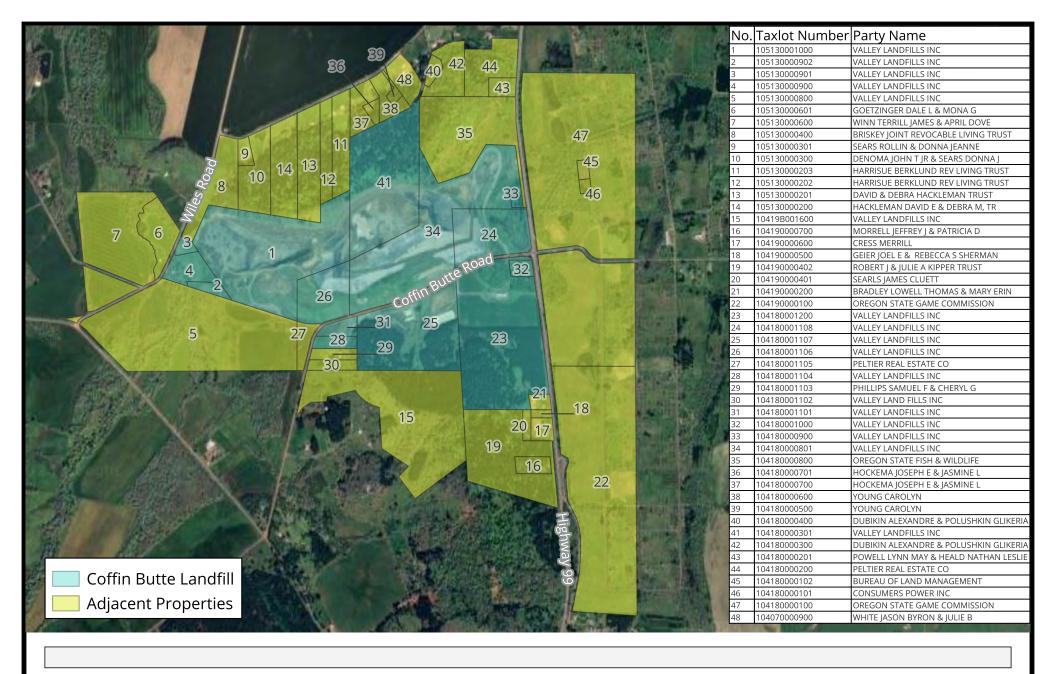

0 0.25 0.5 0.75 1 mi

NOT TO SCALE - FOR APPROXIMATION ONLY

Datum: North American Datum 1983

Projection: StatePlane California I FIPS 0401 Feet

Cartographer: Taylor Bradley

Disclaimer: Map is not intended to function as architectural or engineering plans.



Last Modified On: 11/6/2024 Job Number: 2024-377B

# **Figure 5 - Adjacent Properties**

Coffin Butte Landfill 28972 Coffin Butte Road, Corvallis, OR 97330 **Exhibit 39** 

Page 21 of 249



Permit number: 02-9502-TV-01 Expiration date: 10/01/14

Page 1 of 29

# OREGON DEPARTMENT OF ENVIRONMENTAL QUALITY OREGON TITLE V OPERATING PERMIT

Western Region-Salem Office 750 Front Street NE, Suite 120 Salem, OR 97301-1039 Telephone (503) 378-8240

Issued in accordance with the provisions of ORS 468A.040 and based on the land use compatibility findings included in the permit record.

		Permit recerta.	
ISSUED TO:	INFORMATION RELIED UPON:		
Valley Landfills, Inc. 28972 Coffin Butte Road Corvallis, OR 97330	Application Number: Received:	23594 01/30/09	
PLANT SITE LOCATION:	LAND USE COMPATII	BILITY STATEMENT:	
Coffin Butte Landfill Highway 99 & Coffin Butte Road Corvallis, OR 97330	Issued by: Dated:	Benton County 03/06/97	
ISSUED BY THE DEPARTEMENT OF ENVIRONME	ENTAL QUALITY		
Claudia Davis	OCT 3 0 2009		
Claudia Davis, Western Region Air Quality Manager	Date		

Nature of Business: Municipal Solid Waste Landfill

SIC: 4953

RESPONSIBLE OFFICIAL

FACILITY CONTACT PERSON

Title:

General Manager

Name:

Brian May

Alternate:

Vice President

Title:

General Manager

Phone:

(541) 745-2018

## TABLE OF CONTENTS

LIST OF ABBREVIATIONS THAT MAY BE USED IN THIS PERMIT	3
PERMITTED ACTIVITIES	4
EMISSIONS UNIT (EU) AND POLLUTION CONTROL DEVICE (PCD) IDENTIFICATION	4
EMISSION LIMITS AND STANDARDS, TESTING, MONITORING, AND RECORDKEEPING	
REQUIREMENTS	
Emissions Units PIR and UPR Requirements	14
Emissions Unit TIP Requirements	15
Insignificant Activities Requirements	15
PLANT SITE EMISSION LIMITS	15
GENERAL TESTING REQUIREMENTS	18
GENERAL MONITORING AND RECORDKEEPING REQUIREMENTS	19
REPORTING REQUIREMENTS	20
EMISSION FEES	
NON-APPLICABLE REQUIREMENTS	23
GENERAL CONDITIONS	2/

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 3 of 29

#### LIST OF ABBREVIATIONS THAT MAY BE USED IN THIS PERMIT

ACDP	Air Contaminant Discharge Permit	NA	Not applicable
Act	Federal Clean Air Act	NESHAP	National Emission Standard for
ASTM	American Society of Testing and		Hazardous Air Pollutants
	Materials	NMOC	Nonmethane organic compounds
Btu	British thermal unit	$NO_x$	Nitrogen oxides
CFR	Code of Federal Regulations	NSPS	New Source Performance
CO	Carbon monoxide		Standards
CPMS	Continuous parameter monitoring	$O_2$	Oxygen
	system	OAR	Oregon Administrative Rules
DEQ	Department of Environmental	ODEQ	Oregon Department of
	Quality	7	Environmental Quality
dscf	Dry standard cubic feet	ORS	Oregon Revised Statutes
EF	Emission factor	O&M	Operation and maintenance
EPA	US Environmental Protection	Pb	Lead
	Agency	PCD	Pollution control device
EU	Emissions unit	PM	Particulate matter
FCAA	Federal Clean Air Act	$PM_{10}$	Particulate matter less than 10
FSA	Fuel sampling and analysis		microns in size
gr/dscf	Grain per dry standard cubic feet (1	ppm	Parts per million
	pound = 7000 grains)	PSEL	Plant Site Emission Limit
HAP	Hazardous Air Pollutant as defined	SIP	State Implementation Plan
	by OAR 340-244-0040	SO <sub>2</sub>	Sulfur dioxide
HCFC	Halogenated Chloro-Fluoro-	SSM	Startup, shutdown, malfunction
	Carbons	ST	Source test
$H_2S$	Hydrogen sulfide	VE	Visible emissions
ID	Identification number or label	VMT	Vehicle miles traveled
I&M	Inspection and maintenance	VOC	Volatile organic compounds
LFG	Landfill gas		

Modified EPA Method 9: As used in this permit "Modified EPA Method 9" is defined as follows:

Opacity must be measured in accordance with EPA Method 9. For all standards, the minimum observation period must be six minutes, though longer periods may be required by a specific rule or permit condition. Aggregate times (e.g., 3 minutes in any one hour) consist of the total duration of all readings during the observation period that are equal to or greater than the opacity percentage in the standard, whether or not the readings are consecutive. Each EPA Method 9 reading represents 15 seconds of time. [See also the definition of "Opacity" in OAR 340-208-0010]

#### PERMITTED ACTIVITIES

- 1. Until such time as this permit expires or is modified or revoked, the permittee is allowed to discharge air contaminants from those processes and activities directly related to or associated with air contaminant source(s) in accordance with the requirements, limitations, and conditions of this permit. [OAR 340-218-010 and 340-218-0120(2)]
- 2. All conditions in this permit are federally enforceable except as specified below:
  - 2.a. Conditions 6 through 12, G5, and G9 (OAR 340-248-0005 through 0180) are only enforceable by the state. [OAR 340-218-0060]

#### EMISSIONS UNIT (EU) AND POLLUTION CONTROL DEVICE (PCD) IDENTIFICATION

3. The emissions units regulated by this permit are the following [OAR 340-218-0040(3)]:

Table 1. EU and PCD IDENTIFICATION

Emission Unit Description	EU ID	Pollution Control Device Description	PCD ID
Landfill Gas Control System	Control	Open Flare	FL
Fugitive Landfill Gas, Cell 0	F-LFG1	None	NA
Fugitive Landfill Gas, Cells 1 to 4	F-LFG2	Landfill gas collection and extraction system	LFGCES-1
Vehicle traffic on paved roads	PIR	Water application	NA
Vehicle traffic on unpaved roads	UPR	Chemical suppressant and water application	NA
Tipper	TIP	None	NA
Petroleum contaminated soils	PCS	None	NA
Aggregate Insignificant activities:	AI		
Cell development, operation, and closing		None	NA
Wastewater treatment system operation		Baghouse	DC-1
Leachate collection and wastewater treatment		None	NA
Portable light plant		None	NA
Trash pumps		None	NA NA
Generator		None	NA

# EMISSION LIMITS AND STANDARDS, TESTING, MONITORING, AND RECORDKEEPING REQUIREMENTS

The following tables and conditions contain the applicable requirements along with the testing, monitoring, and recordkeeping requirements for the emissions units to which those requirements apply.

### Facility-wide Requirements

Table 2. Facility wide emission limits and standards

Applicable Requirement	Condition Number	Pollutant/ Parameter	Limit/Standard	Averaging Time	Testing Condition	Monitoring Condition
340-208-0210(2)	4	Fugitive emissions	Minimize	NA ·	NA	5
340-208-0300	6	Air contaminants	No nuisance	NA	NA	8
340-208-0450	7	PM >250μ	No fallout	NA	NA	8
340-248-0280(10)	9	Asbestos disposal	Handling procedures	Recordkeeping	NA	10
340-248-0280(11)	11	Asbestos cover	Maintain cover	Recordkeeping	. NA	12

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 5 of 29

#### **Fugitive Emissions**

4. <u>Applicable Requirement:</u> The permittee must not allow or permit any materials to be handled, transported, or stored; or a building, its appurtenances, or a road to be used, constructed, altered, repaired, or demolished; or any equipment to be operated, without taking reasonable precautions to prevent particulate matter from becoming airborne. Such reasonable precautions must include, but not be limited to the following: [OAR 340-208-0210(2)]

- 4.a. use, where possible, of water or chemicals for control of dust in the demolition of existing buildings or structures, construction operations, the grading of roads or the clearing of land;
- 4.b. application of asphalt, oil, water, or other suitable chemicals on unpaved roads, materials stockpiles, and other surfaces which can create airborne dusts;
- 4.c. full or partial enclosure of materials stockpiles in cases where application of oil, water, or chemicals are not sufficient to prevent particulate matter from becoming airborne;
- 4.d. installation and use of hoods, fans, and fabric filters to enclose and vent the handling of dusty materials;
- 4.e. adequate containment during sandblasting or other similar operations; and,
- 4.f. covering, at all times when in motion, open bodied trucks transporting materials likely to become airborne.
- Monitoring Requirement: At least once each week for a minimum period of 30 minutes, the permittee must visually survey the plant for any sources of excess fugitive emissions using EPA Method 22. For the purpose of this survey, excess fugitive emissions are considered to be any visible emissions generated by fugitive sources that leave the plant site boundaries. The person conducting the observation does not have to be EPA Method 9 certified. However, the individual should be familiar with the procedures of EPA Method 9, including using the proper location to observe visible emissions. If sources of visible emissions are identified, the permittee must: [OAR 340-218-0050(3)(a)]
  - 5.a. immediately take corrective action to minimize the fugitive emissions, including but not limited to those actions identified in Condition 4; or,
  - 5.b. conduct a Modified EPA Method 9 test within 24 hours;
  - 5.c. <u>Recordkeeping:</u> The permittee must maintain records of the fugitive emissions surveys, corrective actions (if necessary), and/or the results of any modified EPA Method 9 tests.

#### **Nuisance Conditions**

- 6. <u>Applicable Requirement:</u> The permittee must not cause or allow air contaminants from any source to cause a nuisance. Nuisance conditions will be verified by Department personnel. [OAR 340-208-0300] This condition is enforceable only by the State.
- 7. <u>Applicable Requirement:</u> The permittee must not cause or permit the emission of any particulate matter larger than 250 microns in size at sufficient duration or quantity, as to create an observable deposition upon the real property of another person. The Department will verify that the deposition exists and will notify the permittee that the deposition must be controlled. [OAR 340-208-0450] This condition is enforceable only by the State.
- 8. Monitoring Requirement: The permittee must maintain a log of each air quality complaint received by the permittee during the operation of the facility and must provide the Western Region-Salem Office of the Department with written notification within 5 days of all nuisance complaints regarding fugitive dust, odors, or particulate deposition received. Documentation shall include date of contact, time of observed nuisance condition, description of nuisance condition, location of receptor, status of plant operation during the observed period, and time of response to complainant. A plant representative must immediately investigate the condition following the receipt of the nuisance complaint and a plant representative must provide a response to the complainant within 24 hours, if possible. This condition is only enforceable by the State. [OAR 340-218-0050(3)(a)]

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 6 of 29

#### Asbestos Disposal and Cover

- 9. <u>Applicable Requirement:</u> The permittee must meet the asbestos-containing material handling and disposal requirements and procedures specified in OAR 340-248-0280(10) for active waste disposal sites. This condition is only enforceable by the state.
- 10. <u>Monitoring Requirement:</u> The permittee must monitor the asbestos-containing material handling and disposal procedures, provide notifications, and record the information required as specified in OAR 340-248-0280(10) for active waste disposal sites. This condition is only enforceable by the State.
- 11. <u>Applicable Requirement:</u> The permittee must meet the asbestos-containing material disposal and cover standards specified in OAR 340-248-0280(11) for inactive waste disposal sites. This condition is only enforceable by the State.
- 12. <u>Monitoring Requirement:</u> The permittee must monitor the asbestos-containing disposal and cover requirements and provide notifications as specified in OAR 340-248-0280(11) for inactive waste disposal sites. This condition is only enforceable by the State.

#### Facility Wide Requirements

13. The following requirements apply facility wide, including, but not limited to, the solid municipal waste landfill, unless an alternate requirement is specifically stated for a particular emissions unit.

Table 3. Summary of NSPS and NESHAP requirements:

Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement
13.1	40 CFR 60.7(a)(4); 40 CFR 60.7(b); 40 CFR 60.7(f)	Notification and recordkeeping.	Maintain records of the occurrence and duration of any startup, shutdown, or malfunction in the operation of the affected facility.  Maintain a file of all measurements and performance testing measurements and all other information required by this part recorded in a permanent form suitable for inspection.	Permittee shall furnish prior written or e-mail notification of any physical or operational change which may increase the emission rate of any air pollutant (such as taking operating gas collection wells off line) to which a standard applies to:  ODEQ, Western Region – Salem Office 750 Front Street NE, Suite 120 Salem, OR 97301-1039  [40 CFR 60.4(a)]
13.2	40 CFR 60.11(d)	Maintain and operate any affected emission unit with good air pollution control practice for minimizing emissions.	None specified.	No additional monitoring required.
13,3	40 CFR 60.12	Circumvention.	None specified.	No additional monitoring required.
13.4	40 CFR 60.752(b)(2)(i i)(A); 40 CFR 60.753(a); 40 CFR 60.755(b) (Landfill NSPS Subpart WWW)	Install, within 60 days, and operate active collection system wells that collect gas from each area, cell, or group of cells in the landfill in which solid waste has been placed for: (1) 5 years or more if active, OR (2) 2 years or more if closed or at final grade.	None specified.	No additional monitoring required.

-					
_" 	Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement
	13.5	40 CFR 60.752(b)(2)(i i)(A) (Landfill NSPS Subpart WWW)	Install an active collection system that is designed to handle the maximum expected gas flow rate from the entire area of the landfill that warrants control over the intended use period of the gas control or treatment system equipment.	To calculate maximum expected gas flow rate: $Q_m = \sum_{i=1}^n 2kL_o M_i \left(e^{-kni}\right)$ where, $Q_m = \max \text{maximum expected gas}$ generation flow rate, $m^3/\text{yr}$ k=methane generation rate constant, year-1 $L_o = \text{methane generation potential,}$ $m^3/\text{Mg solid waste}$ $M_i = \text{mass of solid waste in the i}^{\text{th}}$ section, Mg $t_i = \text{age of the i}^{\text{th}} \text{ section, years}$ $[40 \text{ CFR } 60.755(a)(1)(ii)]$	Submit monthly report to:  ODEQ, Western Region – Salem Office 750 Front Street NE, Suite 120 Salem, OR 97301-1039  Monthly report shall include the date of installation and the location of each well or collection system expansion added.  [40 CFR 60.757(f)]
	13.6	40 CFR 60.752(b); 40 CFR 60.754(a); 40 CFR 60.757(b); 40 CFR 60.4(a) (Landfill NSPS Subpart WWW)	Calculate the NMOC emission rate for the landfill. If the calculated NMOC emission rate is less than 50 Mg/yr, the permittee shall recalculate the NMOC emission rate and submit emission reports to the Department until such time as the calculated NMOC emission rate is ≥ 50 Mg/yr, or the landfill is closed.	Calculate the NMOC emission rate: $M_{NMOC} = \sum_{i=1}^{n} 2kL_oM_i(e^{kti})(C_{NMOC})(3.6x10^{-9})$ where, $M_{NMOC} = Total \ NMOC \ emission \ rate from the landfill (Mg/yr)$	The permittee shall submit an NMOC emission rate report to:  ODEQ, Western Region – Salem Office 750 Front Street NE, Suite 120 Salem, OR 97301-1039  (1) annually, OR (2) if the estimated NMOC emission rate as reported in the annual report is less than 50 Mg/yr in each of the next 5 consecutive years, the permittee may elect to submit an estimate of the NMOC emission rate for the next 5 year period in light of the annual report to the part 5 year period in light of the annual report.
				k=methane generation rate constant=0.05 yr¹ or as determined using Tier 3 per 40 CFR 60.754 (a)(4)  L₀=methane generation potential=170 m³/Mg solid waste Mi=mass of solid waste in the ith section (Mg) ti=age of the ith section (yr)  CNMOC=4000 ppm per 40 CFR 60.754(a)(3) 3.6x10⁻9=conversion factor  The mass of the nondegradable solid waste may be subtracted from the total mass of solid waste in a particular section of the landfill when calculating the value for Mi if properly documented.  [40 CFR 60.754(a)(1)(i)]	the next 5-year period in lieu of the annual report.  If option (2) is chosen, this estimate shall be revised at least once every 5 years. If the actual waste acceptance rate exceeds the estimated waste acceptance rate in any year reported in the 5-year estimate, a revised 5-year estimate shall be submitted to ODEQ at the address given above. The revised estimate shall cover the 5-year period beginning with the year in which the actual waste acceptance rate exceeded the estimated waste acceptance rate. The NMOC emission rate report shall include the current amount of solid waste-in-place and the estimated waste acceptance rate for each year of the 5 years for which an NMOC emission rate is estimated.  The NMOC emission rate report shall include all the data, calculations, sample reports and measurements used to estimate the annual or 5-year emissions. ODEQ may request such additional information as may be necessary to verify the reported NMOC emission rate.  [40 CFR 60.4(a), 40 CFR 60.757(b)]
	13.7	40 CFR 60.752(b)(2)(i j)(A); 40 CFR 60.759(a); 40 CFR 60.759(b) (Landfill NSPS Subpart WWW)	Install an active collection system that is designed to collect gas at a sufficient extraction rate, sited at a sufficient density throughout all gas producing areas, and designed to minimize off-site migration of subsurface gas.	None specified.	Keep for the life of the collection system an up-to-date, readily accessible plot map showing each existing and planned collector in the system and providing a unique identification location label for each collector. Keep up-to-date, readily accessible records of the installation date and location of all newly installed collectors. [40 CFR 60.758(d)]

			<u> </u>	
Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement
13.8	40 CFR 60.753(b)	Operate the LFG control system with negative pressure at each well-head except under the following conditions:	None specified.	Measure gauge pressure in the gas collection header at each individual well, monthly. If a positive pressure exists, action shall be initiated to
	(Landfill NSPS Subpart WWW)	(1) fire or increased well temperature; OR, (2) use of a geomembrane or synthetic cover; OR, (3) a		correct the exceedance within 5 calendar days. It negative pressure cannot be achieved without excess air infiltration within 15 calendar days of
	, , ,	decommissioned well.  Passive gas collection wells do not have		the first measurement, the gas collection system shall be expanded to correct the exceedance with 120 days of the initial measurement of positive
		to meet this condition when approved in writing by the Department.		pressure. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. [40 CFR 60.755(a)(3)]
		Gas collection wells operating under an Alternative Operating and Monitoring Plan approved in writing by the Department do not have to meet this condition.		The annual report shall include record of instance when positive pressure occurred. [40 CFR 60.753(b)(1)]
13.9	40 CFR 60.753(c)	Operate each interior wellhead in the LFG collection system with: (1) LFG temperature <55°C; AND, (2) either: (a)	N <sub>2</sub> by RM 3C; O <sub>2</sub> by RM 3A, except that: (1) regulatory limit is between 20% and 50% of the span; AND, (2)	Measure the N <sub>2</sub> or O <sub>2</sub> concentration in the LFG, and the temperature of the LFG at each individua well, on a monthly basis. If a well exceeds one of
	(Landfill NSPS Subpart WWW)	N <sub>2</sub> < 20%; OR, (b) O <sub>2</sub> < 5%.  Passive gas collection wells do not have to meet this condition when approved in writing by the Department.	data recorder not required; AND, (2) only 2 calibration gases are required; AND, (4) calibration error check not required; AND, (5) allowable sample bias, zero drift, and calibration draft are ±10%.	the operating parameters, action shall be initiated to correct the exceedance within 5 calendar days. If correction of the exceedance cannot be achieve within 15 calendar days of the first measurement, the gas collection system shall be expanded to correct the exceedance within 120 days of the
		Gas collection wells receiving a variance in writing from the Department concerning temperature do not have to meet this condition.	Install a sampling port and a thermometer or other temperature measuring device at each wellhead.  [40 CFR 60.756(a)]	initial exceedance. Any attempted corrective measure shall not cause exceedances of other operational or performance standards. [40 CFR 60.756(a); 40 CFR 60.755(a)(5)]
		Gas collection wells operating under an Alternative Operating and Monitoring Plan approved in writing by the Department do not have to meet this		
- 1		condition.	l de la companya de l	and the second s

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 9 of 29

Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement
13.10	40 CFR 60.753(d) (Landfill	Operate LFG collection system so that the methane concentration is <500 ppm above background at the surface of the landfill.	Conduct surface testing around the perimeter of the collection area along a pattern that traverses the landfill at 30 meter intervals and	Monitor for cover integrity on a monthly basis. Implement cover repairs as necessary. [40 CFR 60.755(c)(5)]
	NSPS Subpart WWW)		where visual observations indicate elevated concentrations of LFG, such as distressed vegetation and	Conduct surface monitoring on a quarterly basis.  Any reading of ≥500 ppm above background at any location shall be recorded as a monitored
	44 <sup>1</sup>		cracks or seeps in the cover per the surface monitoring design plan and topographical map of the monitoring route.	exceedance and actions below taken. As long as the specified actions are taken, the exceedance is not a violation of these operational requirements. The location of each monitored exceedance shall
			Instrument specifications and procedures for surface monitoring devices: (1) portable analyzer shall	be marked and the location recorded. Cover maintenance or adjustments to the vacuum of the adjacent wells to increase the gas collection in the vicinity of each exceedance shall be made and the
			meet the instrument specifications provided in section 3 of RM 21, except that "methane" shall replace all references to VOC; AND, (2)	location shall be re-monitored within 10 calendar days of detecting the exceedance. Any location that initially showed an exceedance but has a methane concentration <500 ppm methane above
	·		calibration gas shall be methane, diluted to a nominal concentration of 500 ppm in air; AND, (3) instrument evaluation procedures of section 4.4	background at the 10-day re-monitoring, shall be re-monitored 1 month from the initial exceedance. If the 1-month re-monitoring shows a concentration <500 ppm above background, no
			of RM 21 shall be used; AND, (4) calibration procedures provided in section 4.2 of RM 21 shall be followed immediately before commencing a surface monitoring	further monitoring of that location is required until the next quarterly monitoring period. If the re- monitoring of the location shows a second exceedance, additional corrective action shall be taken and the location shall be monitored again
			survey. [40 CFR 60.755(d)]  Conduct surface monitoring with a	within 10 days of the second exceedance. If the re- monitoring shows a third exceedance for the same location, a new well or other collection device
		·	portable monitor meeting the specifications provided. The background concentration shall be determined by moving the probe	shall be installed within 120 calendar days of the initial exceedance, OR an alternative remedy to the exceedance, such as upgrading the blower, header pipes or control device, and a corresponding
			inlet upwind and downwind outside the boundary of the landfill at a distance of at least 30 meters from the perimeter wells. Surface emission monitoring shall be	timeline for installation may be submitted to the Administrator for approval. No further monitoring of that location is required until remedy has been taken. [40 CFR 60.755(c)]
			performed in accordance with section 4.3.1 of RM 21, except that the probe inlet shall be placed within 5 to 10 cm of the ground.	Submit monthly report to:  ODEQ, Western Region – Salem Office 750 Front Street NE, Suite 120
			Monitoring shall be performed during typical meteorological conditions.	Salem, OR 97301-1039  Monthly report shall include the location of each
			[40 CFR 60.755(c)]	exceedance of the 500 ppm methane concentration and the concentration recorded at each location for which an exceedance was recorded in the previous month.
13.11	40 CFR 60.753(e)	Operate the collection system such that all collected gases are vented to the control system. In the event the LFG	None specified.	[40 CFR 60.757(f)]  Records shall be kept of all periods when the LFG collection and control system is inoperable, the gas mover system is shut down, or the valves in the
	(Landfill NSPS Subpart WWW)	collection and control is inoperable, the gas mover system shall be shut down and all valves in the collection and control system contributing to venting of the gas to the atmosphere shall be closed within 1 hour.		collection and control system are closed.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 10 of 29

Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement
13.12	40 CFR 60.753(f) (Landfill NSPS Subpart WWW)	Operate the LFG control and treatment system at all times when the collected gas is routed to the system.	None specified.	No additional monitoring required.
13.13	40 CFR 60.755(e) (Landfill NSPS Subpart WWW)	The provisions of the NSPS apply at all times, except during periods of start-up, shutdown, or malfunction, provided that the duration of start-up, shutdown, or malfunction shall not exceed 5 days for collection systems.	None specified.	No additional monitoring required.
13.14	40 CFR 60.757(a)(3); 40 CFR 60.4(a) (Landfill NSPS Subpart WWW)	An amended design capacity report shall be submitted to the Department providing notification of any increase in the design capacity of the landfill.	None specified.	If triggered, the permittee shall submit an amended design capacity report to:  ODEQ, Western Region – Salem Office 750 Front Street NE, Suite 120 Salem, OR 97301-1039 [40 CFR 60.4(a)]
13.15	40 CFR 60.758(a)	Keep, for at least 5 years, up-to-date, readily accessible, on-site records of: (1) the maximum design capacity; AND, (2)	None specified.	No additional monitoring required.
	(Landfill NSPS Subpart WWW)	the current amount of solid waste in- place; AND, (3) the year-by-year waste acceptance rate. Off-site records may be maintained if they are retrievable within 4 hours. Either paper copy or electronic formats are acceptable.		
13.16	40 CFR 60.758(b) (Landfill NSPS Subpart WWW)	Keep up-to-date, readily accessible records for the life of the control equipment of the following data, as measured during the initial performance test or compliance determination: (1) maximum expected gas generation flow rate as calculated in condition 15.5, AND, (2) the density of wells, horizontal collectors, surface collectors, or other gas extraction devices; And, (3) the average combustion temperature measured at least every 15 minutes and averaged over the same time period of the performance test; AND, (4) the percent reduction of NMOC determined as specified in conditions 16 and 17. Records of subsequent tests or monitoring shall be maintained for a minimum of 5 years. Records of the control device vendor specifications shall be maintained until removed.	None specified.	No additional monitoring required.
13.17	40 CFR 60.758(c) (Landfill NSPS Subpart WWW)	Keep for 5 years, up-to-date, readily accessible continuous records of the equipment operating parameters specified to be monitored in the NSPS as well as up-to-date, readily accessible records for periods of operation during which the parameter boundaries established during the most recent performance test are exceeded.	None specified.	No additional monitoring required.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 11 of 29

Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')		Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement		
13.18	40 CFR 61.154(a), (c), (d) (Asbestos NESHAP Subpart M)	In any active waste di asbestos-containing w been deposited: (1) no to the outside air; OR, inches of compacted r containing material at operating day; OR, (3) chemical dust suppres include any used, sper oil) at the end of each	aste material has o visible emissions (2) cover with ≥6 nonasbestos- the end of each ) cover with a sion agent (not to nt, or other waste	None specified.	No additional monitoring required.		
13.19	40 CFR 61.154(b) (Asbestos NESHAP Subpart M)	Areas of disposal of ar waste material must: barrier that adequately the general public; OF inches of compacted r containing material at operating day; OR, (3) signs and fencing that following: (a) display	sbestos-containing (1) have a natural (deters access by (2) cover with ≥6 (onasbestos- the end of each ) install warning meet the	None specified.	No additional monitoring required.		
		entrances and at interv AND, (b) signs posted is easily read; AND, (i upright format signs; a legend, size, and style (spacing between lines equal to the height of the Legend Asbestos Waste	rals of ≤330 feet; I such that legend c) 20" x 14" AND, (d) sign at least equal to s must be at least				
	,	Dust	3/4 inch Sans Serif, Gothic, or Block 14 point Gothic				
		Asbestos is Hazardous to Your Health.  AND, (e) fenced in a r deter access by the ger	nanner adequate to				

Permit number: 02-9502-TV-01
Expiration date: 10/01/14
Page 12 of 29

Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement
13.20	40 CFR 61.154(e)	Maintain waste shipment records for all asbestos-containing waste material received.	None specified.	Waste shipment records shall include: (1) name, address, and telephone number of the waste generator, AND, (2) name, address, and telephone
	(Asbestos NESHAP Subpart M)			number of the transporter(s); AND, (3) volume of waste; AND, (4) presence of improperly enclosed (leak-tight containers) or uncovered; AND, (5) date of waste receipt. Send a copy of the signed waste shipment record to the waste generator
				within 30 days of receipt of the waste.
				If significant amount of improperly enclosed or uncovered waste, report in writing (with copy of waste shipment record) to the Department for the
				waste simplification to the Department for the waste generator (as indicated in the waste shipment record),
	•			ODEQ, Western Region – Salem Office 750 Front Street NE, Suite 120 Salem, OR 97301-1039
				by the following working day.
				Submit reports (with copy of waste shipment record) of unreconciled waste quantity
				discrepancies within 15 days of waste receipt to ODEQ, at the address listed above.  [40 CFR 61.154(e)(1), (2)]
13.21	40 CFR 61.154(f)	Maintain, until closure, records of the location, depth and area, and quantity in	None specified.	No additional monitoring required.
	(Asbestos NESHAP Subpart M)	cubic meters (cubic yards) of asbestos- containing waste material within the disposal area on a map or diagram of the disposal area.		
13.22	40 CFR 61.154(i) (Asbestos NESHAP Subpart M)	Furnish upon request, and make available during normal business hours for inspection by ODEQ, all records required by the Asbestos NESHAP.	None specified.	No additional monitoring required.
13.23	40 CFR 61.154(j) (Asbestos	Notify ODEQ in writing at least 45 days prior to excavating or otherwise disturbing any asbestos-containing waste material that has been deposited at the	None specified.	Notification shall include: (1) scheduled starting and completion dates; AND, (2) reason for disturbing waste; AND, (3) emission control procedures to be implemented; AND, (4) location
	NESHAP Subpart M)	site and is covered.		of any temporary storage site and the final disposal site. [40 CFR 61.154(j)]

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 13 of 29

Condition	Applicable Requirement	Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement
3.24	40 CFR 60.752(b)(2)(i ii)(A) and 40 CFR 60.18 (Landfill NSPS Subpart WWW)	1. Route excess landfill gas not utilized by IC engines to an open flare (Emissions Unit Control) designed and operated in accordance with 40 CFR 60.18.  2. The flare shall be designed for and operated with no visible emissions except for periods not to exceed a total of 5 minutes during any 2 consecutive hours. [40 CFR 60.18(c)(1)]  3. The flare shall be operated with a flame present at all times. [40 CFR 60.18(c)(2)]  4. The flare shall be designed for and operated with an exit velocity less than 60 ft/sec. [40 CFR 60.18(c)(4)(i)]  5. The flare shall be operated at all times when excess landfill gas not utilized by IC engines is being vented to it. [40 CFR 60.18(e)]	Install, calibrate, maintain, and operate according to the manufacturer's specifications the following equipment: (1) a heat sensing device, such as an ultraviolet beam sensor or thermocouple, at the pilot light or the flame itself to indicate the continuous presence of a flame; and (2) a device that records flow to or bypass of the flare. The owner or operator shall either: (i) install, calibrate, and maintain a gas flow measuring device that shall record the flow to the flare at least every 15 minutes; or (ii) secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. [40 CFR 60.756(c)]  Reference Method 22 shall be used to determine the compliance with the visible emissions standard. The observation period is 2 hours. [40 CFR 60.18(f)(1)]  The net heating value of the gas being combusted in the flare shall be calculated by the equation in 40 CFR 60.18 (f)(3).	1. Operate the heat sensing device or thermocouple. [40 CFR 60.756(c)(1)] 2. Record the gas flow to the flare at least every 15 minutes or visually inspect the seal or closure mechanism at least monthly. [40 CFR 60.756(c)(2)]  Recordkeeping 1. Records of the flare vendor specifications until removal of the flare. [40 CFR 60.758(b)] 2. Up-to-date, readily accessible records for the life of the flare of:  a. visible emissions readings b. heat content determinations c. flow rate or bypass flow rate measurements d. exit velocity determinations e. continuous records of the flare pilot flame or flare flame monitoring f. all periods of operations during which the pilot flame or the flare flame is absent [40 CFR 60.758(b)((4) and (c)(4)]
			The actual exit velocity of the flare shall be determined by dividing the volumetric flowrate (in units of standard temperature and pressure) as determined by Reference Methods 2, 2A, 2C,or 2D as appropriate by the unobstructed (free) cross sectional area of the flare tip. [40 CFR 60.18(f)(4)]	

Condition Applicable Requirement		Description (for clarification purposes only, enforceable as listed under 'applicable requirement')	Monitoring and Analysis Procedure or Test Method	Monitoring, Recordkeeping, and Reporting Requirement		
13.25	40 CFR 63.6(e)(3) (Landfill NESHAP Subpart	Develop and implement a written Startup, Shutdown, and Malfunction Plan (SSM Plan) by no later than January 16, 2004.	None specified.	Maintain written SSM Plan on site. If the SSM Plan fails to address, or inadequately addresses, a malfunction, revise the SSM Plan within 45 days after the event to include procedures for operating and maintaining the source during similar malfunctions, and a program of corrective actions		
	AAAA)			for similar malfunctions. [40 CFR 63.6(e)((3)(viii)]		
				Recordkeeping  1. Maintain records for each SSM Plan event which occurs. [40 CFR 63.10(b)(2)(i)]  2. Retain a copy of each previous (superceded) version of the SSM Plan for at least 5 years. [40 CFR 63.6(e)(3)(v)]		
	· · · · · · · · · · · · · · · · · · ·			Reporting		
				<ol> <li>Report semiannually all SSM Plan actions that are consistent with the SSM Plan. [40 CFR 63.10(d)(5)(i)]</li> <li>Notify DEQ within 2 days if an SSM event is not consistent with the SSM Plan and follow up with a letter within 7 days of the event. [40 CFR 63.6(e)(3)iv)]</li> </ol>		

#### **EMISSIONS UNITS PIR AND UPR**

Table 4. Summary of requirements for Emissions Units PIR and UPR:

Applicable Requirement	Condition Number	Pollutant/ Parameter	Limit/Standard	Averaging Time	Testing Condition	Monitoring Condition
340-208-0110(2)	14	Visible emissions	20% opacity	3 min. aggregate in 60 minutes	NA	15

- 14. <u>Applicable Requirement:</u> The permittee must not cause or allow the emissions of any air contaminant into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is equal to or greater than 20% opacity, excluding uncombined water, from emissions units PIR and UPR. [OAR 340-208-0110(2) and 340-208-0110(3)(a)]
- Monitoring Requirement: At least weekly, the permittee must visually survey the facility using EPA Method 22 for any sources of excess fugitive emissions. For the purpose of this survey, excess fugitive emissions are considered to be any visible emissions that leave the down wind plant site boundaries. The person conducting this survey does not have to be EPA Method 9 certified. However, the individual should be familiar with the procedures of EPA Method 9, including using the proper location to observe visible emissions. If sources of excess fugitive emissions are identified during the survey, the permittee shall perform one of the following:
  - 15.a. immediately take corrective action to minimize the fugitive emissions; or,
  - 15.b. conduct a modified EPA Method 9 test on the device(s) causing the opacity problem within 24 hours.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14

Page 15 of 29

15.c. Recordkeeping: The permittee must maintain records of all inspections and any corrective action

#### **EMISSIONS UNIT TIP**

Table 5. Summary of requirements for Emissions Unit TIP:

Applicable Requirement	Condition Number	Pollutant/ Parameter	Limit/Standard	Averaging Time	Testing Condition	Monitoring Condition
340-208-0110(2)	16	Visible emissions	20% opacity	3 min. aggregate in 60 minutes	NA	20
340-226-0210(1)(b)	. 17	PM/PM <sub>10</sub>	0.1 gr/dscf	Avg. of 3 test runs	NA	20

- 16. Applicable Requirement: The permittee must not cause or allow the emissions of any air contaminant into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is equal to or greater than 20% opacity, excluding uncombined water, from emissions unit TIP. [OAR 340-208-0110(2) and 340-208-0110(3)(a)]
- Applicable Requirement: The permittee must not cause or allow the emission of particulate matter in excess 17. of 0.1 grain per standard cubic foot from emissions unit TIP. [OAR 340-226-0210(1)(b)]

# **Insignificant Activities Requirements**

- The Department acknowledges that insignificant emissions units (IEUs) identified by rule as either 18. categorically insignificant activities or aggregate insignificant emissions as defined in OAR 340-200-0020 exist at facilities required to obtain an Oregon Title V Operating Permit. IEUs must comply with all applicable requirements. In general, the requirements that could apply to IEUs are incorporated as follows:
  - OAR 340-208-0110 (20% opacity) 18.a.
  - OAR 340-228-0210 (0.1 gr/dscf corrected to 12% CO<sub>2</sub> or 50% excess air for fuel burning 18.b. equipment)
  - OAR 340-226-0210 (0.1 gr/dscf for non-fugitive, non-fuel burning equipment) 18.c.
  - OAR 340-226-0310 (process weight limit for non-fugitive, non-fuel burning process equipment). 18.d.

Unless otherwise specified in this permit or an applicable requirement, the Department is not requiring any testing, monitoring, recordkeeping, or reporting for the applicable emissions limits and standards that apply to IEUs. However, if testing were performed for compliance purposes, the permittee would be required to use the test methods identified in the definitions of "opacity" and "particulate matter" in OAR 340-208-0010 and perform the testing in accordance with the Department's Source Sampling Manual.

#### PLANT SITE EMISSION LIMITS

19. Applicable Requirement: The plant site emissions must not exceed the following limits for any 12 consecutive calendar month period: [OAR 340-222-0040 through OAR 340-222-0043]

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 16 of 29

Pollutant	Plant Site Emission Limit (Tons/yr)
PM	24
PM <sub>10</sub>	14
СО	99
NO <sub>x</sub>	39
$\mathrm{SO}_2$	39
VOC	39
NMOC	49

- 19.a. The PSEL is based on the actual predicted emissions for the current operating conditions at the facility. A permit modification is required before the PSEL may be increased.
- 20. <u>Monitoring Requirement:</u> The permittee must determine compliance with the Plant Site Emission Limits established in Condition 19 of this permit by conducting monitoring in accordance with the following procedures, test methods, and frequencies: [OAR 340-218-0050(3)]
  - 20.a. The permittee must monitor and maintain records of the following process parameters:

Table 6. PSEL Monitoring

Emissions Unit(s)	Process Parameter	Units	Measurement Frequency	Measurement Method
F-LFG1	Municipal solid waste in place in Cell 0	Mg or tons	Annually	Records
F-LFG2	Municipal solid waste in place in Cells 1, 2A/2B, 2C/2D, and 3	Mg or tons	Annually	Records
Landfill	Municipal solid waste accepted at landfill	Mg or tons	Annually	Records
F-LFG1 & F-LFG2	Landfill gas generated in each system	MMft <sup>3</sup> /month, MMft <sup>3</sup> /yr	Annually using EPA model calculation	Records
F-LFG2	Landfill gas collected and sent to IC engines and % methane	MMft <sup>3</sup> /month, MMft <sup>3</sup> /yr	Monthly/Annually	Records
PIR	Number of total vehicles on paved roads	Number	Monthly/Annually	Records
UPR 1	Number of total vehicles on unpaved road 1	Number	Monthly/Annually	Records
UPR 2	Number of commercial vehicles on unpaved road 2	Number	Monthly/Annually	Records
TIP	Number of hours operated	Hours	Monthly/Annually	Records
PCS	Petroleum contaminated soil received	Tons	Monthly/Annually	Records
Open Flare	Landfill gas collected and sent to open flare and % methane	MMft³/month, MMft³/yr	Monthly/Annually	Records

20.b. Emission factors for calculating pollutant emissions:

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 17 of 29

Table 7. Emission Factors

Emission Units(s)	Pollutant	Emission Factor	Emission Factor Units	Emission F Verificatio	
				Yes/no	Test Method
F-LFG1	СО	10.3	lb/MMft³ fugitive landfill gas	No	NA
	VOC	51.9	lb/MMft³ fugitive landfill gas	No	NA
	NMOC	133.2	lb/MMft³ fugitive landfill gas	No	NA
F-LFG2	СО	10.3	lb/MMft³ fugitive landfill gas	No	NA
	VOC	51.9	lb/MMft³ fugitive landfill gas	No	NA
	NMOC	133.2	lb/MMft³ fugitive landfill gas	No	NA
PIR	PM	0.140	lb/vehicle	No	NA
	PM <sub>10</sub>	0.027	lb/vehicle	No	NA
UPR 1	PM	0.010	lb/vehicle	No	NA
	PM <sub>10</sub>	0.004	lb/vehicle	No	NA
UPR 2	PM	0.098	lb/vehicle	No	NA
	$PM_{10}$	0.021	lb/vehicle	No	NA
Open Flare	PM/PM <sub>10</sub>	8.5	lb/MMft³ combusted landfill gas	No	NA
	СО	110.0	lb/MMft³ combusted landfill gas	No	NA
	NO <sub>x</sub>	20.0	lb/MMft³ combusted landfill gas	No	NA
	SO <sub>2</sub>	8.4	lb/MMft <sup>3</sup> combusted landfill gas	No	NA
	VOC	1.16	lb/MMft³ combusted landfill gas	No	NA
	NMOC	2.71	lb/MMft <sup>3</sup> combusted landfill gas	No	NA
TIP	PM/PM <sub>10</sub>	0.253	lb/hr	No	NA
	CO	0.768	lb/hr	No	NA
	NO <sub>x</sub>	3.57	lb/hr	No	NA
	SO <sub>2</sub>	0.236	lb/hr	No	NA
	VOC/ NMOC	0.289	lb/hr	No	NA
PCS	VOC/ NMOC	0.033	lb/ton PCS	No	NA

20.c. For the emissions unit F-LFG1 listed in Table 8, the permittee must determine monthly and 12-month rolling emissions by multiplying the Process Parameter by the emission factor listed above for each pollutant. Calculations must be completed within 30 days of the end of each month.

$$E = (F-LFG1 \text{ generated}) * EF *K$$

where:

E = Emissions, tons

EF = Emission factor, pounds/units

K = conversion constant: 1 ton/2000 lbs

20.d. For the emissions unit F-LFG2 listed in Table 8, the permittee must determine monthly and 12-month rolling emissions by multiplying the Process Parameter by the emission factor listed above for each pollutant. Calculations must be completed within 30 days of the end of each month.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14

Page 18 of 29

E = (F-LFG2 generated – F-LFG2 collected to IC engines and flare) \* EF \* K

where:

 $\mathbf{E} =$ Emissions, tons

EF =Emission factor, pounds/units

K =conversion constant: 1 ton/2000 lbs

20.e. For the emissions unit Open Flare listed in Table 7, the permittee must determine monthly and 12month rolling emissions by multiplying the Process Parameter by the emission factor listed above for each pollutant. Calculations must be completed within 30 days of the end of each month.

E = (Open flare collected) \* EF \*K

where:

Emissions, tons

EF =Emission factor, pounds/units

K =conversion constant: 1 ton/2000 lbs

20.f. For the emissions units PIR, UPR 1, UPR 2, TIP, and PCS listed in Table 7, the permittee must calculate monthly and 12-month rolling emission by multiplying the Process Parameter by the emission factor listed above for each pollutant. Calculations must be completed within 30 days of the end of each month.

E = MP \* EF \* K

where:

Emissions, tons

MP =Monitored parameter, units/month or units/year

EF =Emission factor, pounds/units

K =conversion constant: 1 ton/2000 lbs

- The emission factors listed in Condition 20.b. are not enforceable limits unless otherwise specified 20.g. in this permit. Compliance with PSELs must only be determined by the calculations contained in Conditions 20.c. through 20.f of this permit using the measured process parameters recorded during the reporting period and the emission factors contained in Condition 20.b.
- 21. The permittee must determine compliance with Condition 19 (Plant Site Emission Limits) by summing the emissions calculated in Condition 20 for each emissions unit for each month and each 12-month rolling period, and adding the Aggregate Insignificant emissions of 1 ton per year by pollutant, and comparing the resulting emissions to the Plant Site Emission Limits in Condition 19.

# GENERAL TESTING REQUIREMENTS

- 22. Unless otherwise specified in this permit, the permittee must conduct all testing in accordance with the Department's Source Sampling Manual. [OAR 340-212-0120 and 40 CFR 60.8]
  - 22.a. Unless otherwise specified by a state or federal regulation, the permittee must submit a source test plan to the Department at least 30 days prior to the date of the test. The test plan must be prepared in accordance with the Source Sampling Manual and address any planned variations or alternatives to prescribed test methods. The permittee should be aware that if significant variations are requested, it may require more than 30 days for the Department to grant approval and may require EPA approval in addition to approval by the Department.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 19 of 29

- 22.b. Only regular operating staff may adjust the processes or emission control device parameters during a compliance source test and within two (2) hours prior to the tests. Any operating adjustments made during a compliance source test, which are a result of consultation during the tests with source testing personnel, equipment vendors, or consultants, may render the source test invalid.
- 22.c. Unless otherwise specified by permit condition or Department approved source test plan, all compliance source tests must be performed as follows:
  - 22.c.i. at least 90% of the design capacity for new or modified equipment; 22.c.ii at least 90% of the maximum operating rate for existing equipment; or
  - 22.c.iii. at 90 to 110% of the normal maximum operating rate for existing equipment. For purposes of this permit, the normal maximum operating rate is defined as the 90th percentile of the average hourly operating rates during a 12 month period immediately preceding the source test. Data supporting the normal maximum operating rate must be included with the source test report.
- 22.d. Each source test must consist of at least three (3) test runs and the emissions results must be reported as the arithmetic average of all valid test runs. If for reasons beyond the control of the permittee a test run is invalid, the Department may accept two (2) test runs for demonstrating compliance with the emission limit or standard.
- 22.e. Source test reports prepared in accordance with the Department's Source Sampling Manual must be submitted to the Department within 45 days of completing any required source test, unless a different time period is approved in the source test plan submitted prior to the source test.

#### GENERAL MONITORING AND RECORDKEEPING REQUIREMENTS

## **General Monitoring Requirements:**

- 23. The permittee must not knowingly render inaccurate any required monitoring device or method. [OAR 340-218-0050(3)(a)(E)]
- 24. Methods used to determine actual emissions for fee purposes must also be used for compliance determination and can be no less rigorous than the requirements of OAR 340-218-0080. [OAR 340-218-0050(3)(a)(F)]
- 25. Monitoring requirements must commence on the date of permit issuance unless otherwise specified in the permit or an applicable requirement. [OAR 340-218-0050(3)(a)(G)]

#### **General Recordkeeping Requirements**

- 26. The permittee must maintain the following general records of testing and monitoring required by this permit: [OAR 340-218-0050(3)(b)(A)]
  - 26.a. the date, place as defined in the permit, and time of sampling or measurements;
  - 26.b. the date(s) analyses were performed;
  - 26.c. the company or entity that performed the analyses;
  - 26.d. the analytical techniques or methods used;
  - 26.e. the results of such analyses;
  - 26.f. the operating conditions as existing at the time of sampling or measurement; and
  - 26.g. the records of quality assurance for continuous monitoring systems (including but not limited to quality control activities, audits, calibration drift checks).

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 20 of 29

- 27. Unless otherwise specified by permit condition, the permittee must make every effort to maintain 100 percent of the records required by the permit. If information is not obtained or recorded for legitimate reasons (e.g., the monitor or data acquisition system malfunctions due to a power outage), the missing record(s) will not be considered a permit deviation provided the amount of data lost does not exceed 10% of the averaging periods in a reporting period or 10% of the total operating hours in a reporting period, if no averaging time is specified. Upon discovering that a required record is missing, the permittee must document the reason for the missing record. In addition, any missing record that can be recovered from other available information will not be considered a missing record. [OAR 340-214-0110, 340-212-0160, and 340-218-0050(3)(b)]
- 28. Recordkeeping requirements must commence on the date of permit issuance unless otherwise specified in the permit or an applicable requirement. [OAR 340-218-0050(3)(b)(C)]
- 29. Unless otherwise specified, the permittee must retain records of all required monitoring data and support information for a period of at least five (5) years from the date of the monitoring sample, measurement, report, or application. Support information includes all calibration and maintenance records and all original strip-chart recordings (or other original data) for continuous monitoring instrumentation, and copies of all reports required by the permit. All existing records required by the previous Oregon Title V Operating Permit must also be retained for five (5) years from the date of the monitoring sample, measurement, report, or application. [OAR 340-218-0050(b)(B)]

# REPORTING REQUIREMENTS

## **General Reporting Requirements**

- 30. <u>Excess Emissions Reporting</u> The permittee must report all excess emissions as follows: [OAR 340-214-0300 through 340-214-0360]
  - 30.a. Immediately (within 1 hour of the event) notify the Department of an excess emission event by phone, e-mail, or facsimile; and
  - 30.b. Within 15 days of the excess emissions event, submit a written report that contains the following information: [OAR 340-214-0340(1)]
    - 30.b.i. The date and time of the beginning of the excess emissions event and the duration or best estimate of the time until return to normal operation;
    - 30.b.ii. The date and time the owner or operator notified the Department of the event;
    - 30.b.iii. The equipment involved;
    - Whether the event occurred during planned startup, planned shutdown, scheduled maintenance, or as a result of a breakdown, malfunction, or emergency;
    - 30.b.v. Steps taken to mitigate emissions and corrective action taken, including whether the approved procedures for a planned startup, shutdown, or maintenance activity were followed;
    - 30.b.vi. The magnitude and duration of each occurrence of excess emissions during the course of an event and the increase over normal rates or concentrations as determined by continuous monitoring or best estimate (supported by operating data and calculations);
    - 30.b.vii. The final resolution of the cause of the excess emissions; and
    - 30.b.viii. Where applicable, evidence supporting any claim that emissions in excess of technology-based limits were due to any emergency pursuant to OAR 340-214-0360.
  - 30.c. In the event of any excess emissions which are of a nature that could endanger public health and occur during non-business hours, weekends, or holidays, the permittee must immediately notify the Department by calling the Oregon Accident Response System (OARS). The current number is 1-800-452-0311.
  - 30.d. If startups, shutdowns, or scheduled maintenance may result in excess emissions, the permittee must submit startup, shutdown, or scheduled maintenance procedures used to minimize excess

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 21 of 29

emissions to the Department for prior authorization, as required in OAR 340-214-0310 and 340-214-0320. New or modified procedures must be received by the Department in writing at least 72 hours prior to the first occurrence of the excess emission event. The permittee must abide by the approved procedures and have a copy available at all times.

- 30.e. The permittee must notify the Department of planned startup/shutdown or scheduled maintenance events.
- 30.f. The permittee must continue to maintain a log of all excess emissions in accordance with OAR 340-214-0340(3). However, the permittee is not required to submit the detailed log with the semi-annual and annual monitoring reports. The permittee is only required to submit a brief summary listing the date, time, and the affected emissions units for each excess emission that occurred during the reporting period. [OAR 340-218-0050(3)(c)]
- 31. <u>Permit Deviations Reporting:</u> The permittee must promptly report deviations from permit requirements that do not cause excess emissions, including those attributable to upset conditions, as defined in the permit, the probable cause of such deviations, and any corrective actions or preventive measures taken. "Prompt" means within 15 days of the deviation. Deviations that cause excess emissions, as specified in OAR 340-214-0300 through 340-214-0360 must be reported in accordance with Condition 23.
- 32. All required reports must be certified by a responsible official consistent with OAR 340-218-0040(5);[OAR 340-218-0050(3)(c)(D)]
- Reporting requirements must commence on the date of permit issuance unless otherwise specified in the permit. [OAR 340-218-0050(3)(c)(E)]

Addresses of regulatory agencies are the following, unless otherwise instructed:

DEQ – Western Region 750 Front Street NE, Suite 120 Salem, OR 97310 (503) 378-8240 DEQ – Air Quality Division 811 SW Sixth Avenue Portland, OR 97204 (503) 229-5359

Air Operating Permits
US Environmental Protection Agency
Mail Stop OAQ-108
1200 Sixth Avenue
Seattle, WA 98101

# Semi-annual and Annual Reports

- 34. The permittee must submit three (3) copies of reports of any required mon ring at least every 6 months, completed on forms approved by the Department. Six month periods are laury 1 to June 30, and July 1 to December 31. One copy of the report must be submitted to the EPA at 1 two copies to the DEQ regional office. All instances of deviations from permit requirements must be clarly identified in such reports: [OAR 340-218-0050(3)(c)(A) and 340-218-0080(6)(d)]]
  - 34.a. The first semi-annual report is be due on July 30 and must include the semi-annual compliance certification, OAR 340-218-0080.
  - 34.b. The annual report is due on February 15 and must consist of the following:

34.b.i. the emission fee report; [OAR 340-220-0100]

34.b.ii. a summary of the excess emissions upset log; [OAR 340-214-0340] the second semi-annual compliance certification; [OAR 340-218-0080]

34.b.iv. the annual emission inventory report for the prior calendar year;

34.b.v. greenhouse gas emissions in accordance with Division 215 of OAR

Chapter 340. [OAR 340-215-0040(3)(a)]

The semi-annual compliance certification must include the following (provided that the identification of applicable information may cross-reference the permit or previous reports, as applicable): [OAR 340-218-0080(6)(c)]

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 22 of 29

- 35.a. The identification of each term or condition of the permit that is the basis of the certification;
- 35.b. The identification of the method(s) or other means used by the owner or operator for determining the compliance status with each term and condition during the certification period, and whether such methods or other means provide continuous or intermittent data. Such methods and other means must include, at a minimum, the methods and means required under OAR 340-218-0050(3). Note: Certification of compliance with the monitoring conditions in the permit is sufficient to meet this requirement, except when the permittee must certify compliance with new applicable requirements that are incorporated by reference into the permit. When certifying compliance with new applicable requirements that are not yet in the permit, the permittee must provide the information required by this condition. If necessary, the owner or operator also must identify any other material information that must be included in the certification to comply with section 113(c)(2) of the FCAA, which prohibits knowingly making a false certification or omitting material information;
- 35.c. The status of compliance with terms and conditions of the permit for the period covered by the certification, including whether compliance during the period was continuous or intermittent. The certification must be based on the method or means designated in OAR 340-218-0040(6)(c)(B). The certification must identify each deviation and take it into account in the compliance certification. The certification must also identify as possible exceptions to compliance any periods during which compliance is required and in which an excursion or exceedance, as defined under OAR 340-200-0020, occurred; and
- 35.d. Such other facts as the Department may require to determine the compliance status of the source.
- 36. Notwithstanding any other provision contained in any applicable requirement, the owner or operator may use monitoring as required under OAR 340-218-0050(3) and incorporated into the permit, in addition to any specified compliance methods, for the purpose of submitting compliance certifications. [OAR 340-218-0080(6)(e)]

# **Monthly Reports**

- 37. The permittee must report the following information for the preceding month within 30 days of the end of each calendar month to the Western Region-Salem office of the Department:
  - 37.a. The cover integrity monitoring results and repairs, if necessary, as required by Condition 13.10;
  - 37.b. The results of the quarterly surface methane monitoring, if conducted during the month, and corrective actions taken as required by Condition 13.10;
  - 37.c. Any other information regarding upsets, maintenance required, or operational problems encountered during the month on the landfill gas collection or control systems;
  - 37.d. Information concerning the installation date and location of any newly installed wells or expansion of the landfill gas collection system as required by Condition 13.7;
  - 37.e. The amount of landfill gas collected and treated in both the IC engines and the flare;
  - 37.f. The total operating hours of the IC engines and flare during the month; and,
  - 37.g. Log of air quality complaints received during the month under Condition 8.

# **EMISSION FEES**

38. Emission fees will be based on the Plant Site Emission Limits in Condition 19, unless the permittee elects to report actual emissions for one or more permitted processes/pollutants using the procedures in OAR 340 Division 220. If the permittee reports actual emissions for one or more permitted processes/pollutants, the permitted emissions for the remaining permitted processes/pollutants will be based on the following table: [OAR 340-220-0090]

Permit number: 02-9502-TV-01 Expiration date: 10/01/14

Page 23 of 29

Emission Source Description	Permitted	PM <sub>10</sub>	SO <sub>2</sub>	NOx	VOC
	Process Code	(tons)	(tons)	(tons)	(tons
<u> </u>	(DEQ Codes)				
Roads	FS-1	3.1			
Open Flare	GS-1	2.2	2.2	5.2	0.3
Fugitive LFG	FS-2				11.0
Petroleum Cont. Soil	FS-2				0.8
Tipper	GS-1	0.3	0.2	3.6	0.3
AI	GS-1	1.0	1.0	1.0	1.0

# NON-APPLICABLE REQUIREMENTS

39. State and Federal air quality requirements (e.g., rules and regulations) currently determined not applicable to the permittee are listed below along with the reason for the non-applicability: [OAR 340-218-0110]

					•	
Reason Code	Applicable Requirement	Reason Code	Applicable Requirement	Reason Code	Applicable Requirement	Reason <u>Code</u>
340:	0250	. I	All rules	C	0190	E
	Division 222		Division 242		Division 266	
I	0042	C	All rules	C	All rules	В
	0060	H	Division 248		40 CFR	
I	Division 224		0210 through 0230	В	Part 55	В
	0050	C	Division 250		Part 57	В
C	0060	C	All rules	I	Part 60, except	В
I	Division 225		Division 252			
	0045	C	All rules	I	**	В
D	Division 226		Division 254		subparts A, M, and	Б
	0400	Н	All rules	E	appendices	
В	Division 228		Division 256		Part 63, except	В
	0100 through 0130	F .	All rules	В	and appendices	
. <b>J</b>	0300 through 0530	В	Division 257		Part 68	В
	0600 through 0678	В	All rules	E	Part 72 through 76	В
C	Division 230		Division 258		Part 77	В
В	All rules	E	All rules	В	Part 78	В
	Division 232		Division 260		Part 82, except	В
В	All rules	C	. All rules	В	subpart F	
Н	Division 234		Division 262		Part 85 through 89	В
I	All rules	В	All rules	В		
I	Division 236		Division 264			
В	All rules	В	0100	D		
В	Division 240		0120 through 0170	D		
	Code 340:  I I C I D B J C B H I I I B	Code   Requirement	Code         Requirement         Code           340:         0250         I           Division 222           I         0042         C           0060         H           I         Division 224           0050         C           0060         C           I         Division 225           0045         C           D         Division 226           0400         H           B         Division 228           0100 through 0130         F           J         0300 through 0530         B           C         Division 230         B           B         All rules         E           Division 232         E           B         All rules         B           I         Division 234         I           I         Division 236         B           B         All rules         B	Code         Requirement         Code         Requirement           340:         0250         I         All rules           Division 222         Division 242         Division 242           I         0042         C         All rules           0060         H         Division 248         0210 through 0230           C         0050         C         Division 250           C         0060         C         All rules           I         Division 225         Division 252           0045         C         All rules           D         Division 226         Division 254           0400         H         All rules           B         Division 228         Division 256           0100 through 0130         F         All rules           J         0300 through 0530         B         Division 257           0600 through 0678         B         All rules           C         Division 230         Division 258           B         All rules         E         All rules           Division 232         Division 260         All rules           H         Division 234         Division 262         Division 264           B <td>Code         Requirement         Code         Requirement         Code           340:         0250         I         All rules         C           Division 222         Division 242         Division 242         C           I         0060         H         Division 248         C           I         Division 224         0210 through 0230         B           I         0050         C         Division 250         D           C         0060         C         All rules         I           I         Division 225         Division 252         D           0045         C         All rules         I           D         Division 226         Division 254         D           0400         H         All rules         E           B         Division 228         Division 256         D           J         0300 through 0130         F         All rules         B           C         Division 230         B         Division 257         D           0600 through 0678         B         All rules         B           Division 232         Division 260         D           B         All rules         B</td> <td>Code         Requirement         Code         Requirement         Code         Requirement           340:         0250         I         All rules         C         0190           Juvision 222         Division 224         Division 242         Division 266           I         0042         C         All rules         C         All rules           I         Division 224         0210 through 0230         B         Part 55           C         0060         C         Division 250         Part 57           C         0060         C         All rules         I         Part 60, except subparts A, WWW, and appendixes           I         Division 225         Division 252         Subparts A, WWW, and appendixes           D         Od45         C         All rules         E         Part 61, except subparts A, M, and appendixes           B         Division 226         Division 254         Subparts A, AAAA, and appendixes           B         Division 228         Division 256         Part 63, except subparts A, AAAA, and appendixes           J         0300 through 0530         B         Division 257         Part 68           C         Division 230         Division 258         Part 77           B</td>	Code         Requirement         Code         Requirement         Code           340:         0250         I         All rules         C           Division 222         Division 242         Division 242         C           I         0060         H         Division 248         C           I         Division 224         0210 through 0230         B           I         0050         C         Division 250         D           C         0060         C         All rules         I           I         Division 225         Division 252         D           0045         C         All rules         I           D         Division 226         Division 254         D           0400         H         All rules         E           B         Division 228         Division 256         D           J         0300 through 0130         F         All rules         B           C         Division 230         B         Division 257         D           0600 through 0678         B         All rules         B           Division 232         Division 260         D           B         All rules         B	Code         Requirement         Code         Requirement         Code         Requirement           340:         0250         I         All rules         C         0190           Juvision 222         Division 224         Division 242         Division 266           I         0042         C         All rules         C         All rules           I         Division 224         0210 through 0230         B         Part 55           C         0060         C         Division 250         Part 57           C         0060         C         All rules         I         Part 60, except subparts A, WWW, and appendixes           I         Division 225         Division 252         Subparts A, WWW, and appendixes           D         Od45         C         All rules         E         Part 61, except subparts A, M, and appendixes           B         Division 226         Division 254         Subparts A, AAAA, and appendixes           B         Division 228         Division 256         Part 63, except subparts A, AAAA, and appendixes           J         0300 through 0530         B         Division 257         Part 68           C         Division 230         Division 258         Part 77           B

#### Reason code definitions:

Α	this pollutant	is not emitted	by the facility
---	----------------	----------------	-----------------

B the facility is not in this source category

C the facility is not in a special control/nonattainment area

D the facility is not in this county

E the facility does not have this emissions unit

F the facility does not use this fuel type

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 24 of 29

- G the rule does not apply because no changes have been made at the facility that would trigger these procedural requirements
- H this method/procedure is not used by the facility
- I this rule applies only to DEQ and regional authorities
- J there are no emissions units with add-on control devices or the pre-controlled potential emissions are less than 100 tons per year or the emissions units with add-on control devices and pre-controlled emissions greater than 100 tons per year are subject to emissions standards promulgated after November of 1990

#### **GENERAL CONDITIONS**

# G1. General Provision

Terms not otherwise defined in this permit have the meaning assigned to such terms in the referenced regulation.

#### G2. Reference materials

Where referenced in this permit, the versions of the following materials are effective as of the dates noted unless otherwise specified in this permit:

- a. Source Sampling Manual; January 23, 1992 State Implementation Plan Volume 3, Appendix A4;
- b. Continuous Monitoring Manual; January 23, 1992 State Implementation Plan Volume 3, Appendix A6; and
- c. All state and federal regulations as in effect on the date of issuance of this permit.

# G3. Applicable Requirements [OAR 340-218-0010(3)(b)]

Oregon Title V Operating Permits do not replace requirements in Air Contaminant Discharge Permits (ACDP) issued to the source even if the ACDP(s) have expired. For a source operating under a Title V permit, requirements established in an earlier ACDP remain in effect notwithstanding expiration of the ACDP or Title V permit, unless a provision expires by its terms or unless a provision is modified or terminated following the procedures used to establish the requirement initially. Source specific requirements, including, but not limited to TACT, RACT, BACT, and LAER requirements, established in an ACDP must be incorporated into the Oregon Title V Operating Permit and any revisions to those requirements must follow the procedures used to establish the requirement initially.

# G4. Compliance [OAR 340-218-0040(3)(n)(C), 340-218-0050(6), and 340-218-0080(4)]

- a. The permittee must comply with all conditions of this permit. Any permit condition noncompliance constitutes a violation of the Federal Clean Air Act and/or state rules and is grounds for enforcement action; for permit termination, revocation and re-issuance, or modification; or for denial of a permit renewal application. Any noncompliance with a permit condition specifically designated as enforceable only by the state constitutes a violation of state rules only and is grounds for enforcement action; for permit termination, revocation and re-issuance, or modification; or for denial of a permit renewal application.
- b. Any schedule of compliance for applicable requirements with which the source is not in compliance at the time of permit issuance is supplemental to, and does not sanction noncompliance with the applicable requirements on which it is based.
- c. For applicable requirements that will become effective during the permit term, the source must meet such requirements on a timely basis unless a more detailed schedule is expressly required by the applicable requirement.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14

Page 25 of 29

# G5. <u>Masking Emissions:</u>

The permittee must not install or use any device or other means designed to mask the emission of an air contaminant that causes or is likely to cause detriment to health, safety, or welfare of any person or otherwise violate any other regulation or requirement. [OAR 340-208-0400] This condition is enforceable only by the State.

# G6. <u>Credible Evidence:</u>

Notwithstanding any other provisions contained in any applicable requirement, any credible evidence may be used for the purpose of establishing whether a person has violated or is in violation of any such applicable requirements. [OAR 340-214-0120]

G7. <u>Certification</u> [OAR 340-214-0110, 340-218-0040(5), 340-218-0050(3)(c)(D), and 340-218-0080(2)]

Any document submitted to the Department or EPA pursuant to this permit must contain certification by a responsible official of truth, accuracy and completeness. All certifications must state that based on information and belief formed after reasonable inquiry, the statements and information in the document are true, accurate, and, complete. The permittee must promptly, upon discovery, report to the Department a material error or omission in these records, reports, plans, or other documents.

G8. Open Burning [OAR Chapter 340, Division 264]

The permittee is prohibited from conducting open burning, except as may be allowed by OAR 340-264-0020 through 340-264-0200.

G9. Asbestos [40 CFR Part 61, Subpart M (federally enforceable), OAR Chapter 340-248-0005 through 340-248-0180 (state-only enforceable) and 340-248-0205 through 340-248-0280]

The permittee must comply with OAR Chapter 340, Division 248, and 40 CFR Part 61, Subpart M when conducting any renovation or demolition activities at the facility.

G10. Stratospheric Ozone and Climate Protection [40 CFR 82 Subpart F, OAR 340-260-0040]

The permittee must comply with the standards for recycling and emissions reduction pursuant to 40 CFR Part 82, Subpart F, Recycling and Emissions Reduction.

#### G11. Permit Shield [OAR 340-218-0110]

- a. Compliance with the conditions of the permit is deemed compliance with any applicable requirements as of the date of permit issuance provided that:
  - i. such applicable requirements are included and are specifically identified in the permit, or
  - ii. the Department, in acting on the permit application or revision, determines in writing that other requirements specifically identified are not applicable to the source, and the permit includes the determination or a concise summary thereof.
- b. Nothing in this rule or in any federal operating permit alters or affects the following:
  - i. the provisions of ORS 468.115 (enforcement in cases of emergency) and ORS 468.035 (function of department);
  - ii. the liability of an owner or operator of a source for any violation of applicable requirements prior to or at the time of permit issuance;

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 26 of 29

- iii. the applicable requirements of the national acid rain program, consistent with section 408(a) of the FCAA; or
- iv. the ability of the Department to obtain information from a source pursuant to ORS 468.095 (investigatory authority, entry on premises, status of records).
- c. Sources are not shielded from applicable requirements that are enacted during the permit term, unless such applicable requirements are incorporated into the permit by administrative amendment, as provided in OAR 340-218-0150(1)(h), significant permit modification, or reopening for cause by the Department.

# G12. <u>Inspection and Entry</u> [OAR 340-218-0080(3)]

Upon presentation of credentials and other documents as may be required by law, the permittee must allow the Department of Environmental Quality, or an authorized representative (including an authorized contractor acting as a representative of the EPA Administrator), to perform the following:

- a. enter upon the permittee's premises where an Oregon Title V Operating Permit program source is located or emissions-related activity is conducted, or where records must be kept under the conditions of the permit;
- b. have access to and copy, at reasonable times, any records that must be kept under conditions of the permit;
- c. inspect, at reasonable times, any facilities, equipment (including monitoring and air pollution control equipment), practices, or operations regulated or required under the permit; and
- d. as authorized by the FCAA or state rules, sample or monitor, at reasonable times, substances or parameters, for the purposes of assuring compliance with the permit or applicable requirements.

# G13. Fee Payment [OAR 340-220-0010, and 340-220-0030 through 340-220-0190]

The permittee must pay an annual base fee and an annual emission fee for particulates, sulfur dioxide, nitrogen oxides, and volatile organic compounds. The permittee must submit payment to the Department of Environmental Quality, Business Office, 811 SW 6th Avenue, Portland, OR 97204, within 30 days of the date the Department mails the fee invoice or August 1 of the year following the calendar year for which emission fees are paid, whichever is later. Disputes must be submitted in writing to the Department of Environmental Quality. Payment must be made regardless of the dispute. User-based fees will be charged for specific activities (e.g., computer modeling review, ambient monitoring review, etc.) requested by the permittee.

# G14. Off-Permit Changes to the Source [OAR 340-218-0140(2)]

- a. The permittee must monitor for, and record, any off-permit change to the source that:
  - i. is not addressed or prohibited by the permit;
  - ii. is not a Title I modification;
  - iii. is not subject to any requirements under Title IV of the FCAA;
  - iv. meets all applicable requirements;
  - v. does not violate any existing permit term or condition; and
  - vi. may result in emissions of regulated air pollutants subject to an applicable requirement but not otherwise regulated under this permit or may result in insignificant changes as defined in OAR 340-200-0020.
- b. A contemporaneous notification, if required under OAR 340-218-0140(2)(b), must be submitted to the Department and the EPA.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14

Page 27 of 29

c. The permittee must keep a record describing off-permit changes made at the facility that result in emissions of a regulated air pollutant subject to an applicable requirement, but not otherwise regulated under the permit, and the emissions resulting from those off-permit changes.

The permit shield of Condition G9 does not extend to off-permit changes. d.

#### G15. Section 502(b)(10) Changes to the Source [OAR 340-218-0140(3)]

- The permittee must monitor for, and record, any section 502(b)(10) change to the source, which is a. defined as a change that would contravene an express permit term but would not:
  - i. violate an applicable requirement;
  - ii. contravene a federally enforceable permit term or condition that is a monitoring, recordkeeping, reporting, or compliance certification requirement; or
  - iii. be a Title I modification.
- b. A minimum 7-day advance notification must be submitted to the Department and the EPA in accordance with OAR 340-218-0140(3)(b).
- The permit shield of Condition G9 does not extend to section 502(b)(10) changes.

#### G16. Administrative Amendment [OAR 340-218-0150]

Administrative amendments to this permit must be requested and granted in accordance with OAR 340-218-0150. The permittee must promptly submit an application for the following types of administrative amendments upon becoming aware of the need for one, but no later than 60 days of such event:

- legal change of the registered name of the company with the Corporations Division of the State of a.
- sale or exchange of the activity or facility. b.

#### G17. Minor Permit Modification [OAR 340-218-0170]

The permittee must submit an application for a minor permit modification in accordance with OAR 340-218-0170.

#### G18. Significant Permit Modification [OAR 340-218-0180]

The permittee must submit an application for a significant permit modification in accordance with OAR 340-218-0180

#### G19. Staying Permit Conditions [OAR 340-218-0050(6)(c)]

Notwithstanding conditions G16 and G17, the filing of a request by the permittee for a permit modification, revocation and re-issuance, or termination, or of a notification of planned changes or anticipated noncompliance does not stay any permit condition.

#### G20. Construction/Operation Modification [OAR 340-218-0190]

The permittee must obtain approval from the Department prior to construction or modification of any stationary source or air pollution control equipment in accordance with OAR 340-210-0200 through OAR 340-210-0250.

Permit number: 02-9502-TV-01 Expiration date: 10/01/14 Page 28 of 29

# G21. New Source Review Modification [OAR 340-224-0010]

The permittee may not begin construction of a major source or a major modification of any stationary source without having received an air contaminant discharge permit (ACDP) from the Department and having satisfied the requirements of OAR 340, Division 224.

#### G22. Need to Halt or Reduce Activity Not a Defense [OAR 340-218-0050(6)(b)]

The need to halt or reduce activity will not be a defense. It will not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of this permit.

# G23. <u>Duty to Provide Information</u> [OAR 340-218-0050(6)(e) and OAR 340-214-0110]

The permittee must furnish to the Department, within a reasonable time, any information that the Department may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit, or to determine compliance with the permit. Upon request, the permittee must also furnish to the Department copies of records required to be retained by the permit or, for information claimed to be confidential, the permittee may furnish such records to the Department along with a claim of confidentiality.

# G24. Reopening for Cause [OAR 340-218-0050(6)(c) and 340-218-0200]

- a. The permit may be modified, revoked, reopened and reissued, or terminated for cause as determined by the Department.
- b. A permit must be reopened and revised under any of the circumstances listed in OAR 340-218-0200(1)(a).
- c. Proceedings to reopen and reissue a permit must follow the same procedures as apply to initial permit issuance and affect only those parts of the permit for which cause to reopen exists.

# G25. Severability Clause [OAR 340-218-0050(5)]

Upon any administrative or judicial challenge, all the emission limits, specific and general conditions, monitoring, recordkeeping, and reporting requirements of this permit, except those being challenged, remain valid and must be complied with.

# G26. Permit Renewal and Expiration [OAR 340-218-0040(1)(a)(D) and 340-218-0130]

- a. This permit expires at the end of its term, unless a timely and complete renewal application is submitted as described below. Permit expiration terminates the permittee's right to operate.
- b. Applications for renewal must be submitted at least 12 months before the expiration of this permit, unless the Department requests an earlier submittal. If more than 12 months is required to process a permit renewal application, the Department must provide no less than six (6) months for the owner or operator to prepare an application.
- c. Provided the permittee submits a timely and complete renewal application, this permit will remain in effect until final action has been taken on the renewal application to issue or deny the permit.

# G27. Permit Transference [OAR 340-218-0150(1)(d)]

The permit is not transferable to any person except as provided in OAR 340-218-0150(1)(d).

Permit number: 02-9502-TV-01 Expiration date: 10/01/14

Page 29 of 29

# G28. Property Rights [OAR 340-200-0020 and 340-218-0050(6)(d)]


The permit does not convey any property rights in either real or personal property, or any exclusive privileges, nor does it authorize any injury to private property or any invasion of personal rights, nor any infringement of federal, state, or local laws or regulations, except as provided in OAR 340-218-0110.


# G29. Permit Availability [OAR 340-200-0020 and 340-218-0120(2)]

The permittee must have available at the facility at all times a copy of the Oregon Title V Operating Permit and must provide a copy of the permit to the Department or an authorized representative upon request.

# ALL INQUIRIES SHOULD BE DIRECTED TO:

Department of Environmental Quality Air Quality Division Western Region-Salem Office 750 Front Street NE, Suite 120 Salem, OR 97301-1039 (503) 378-8240

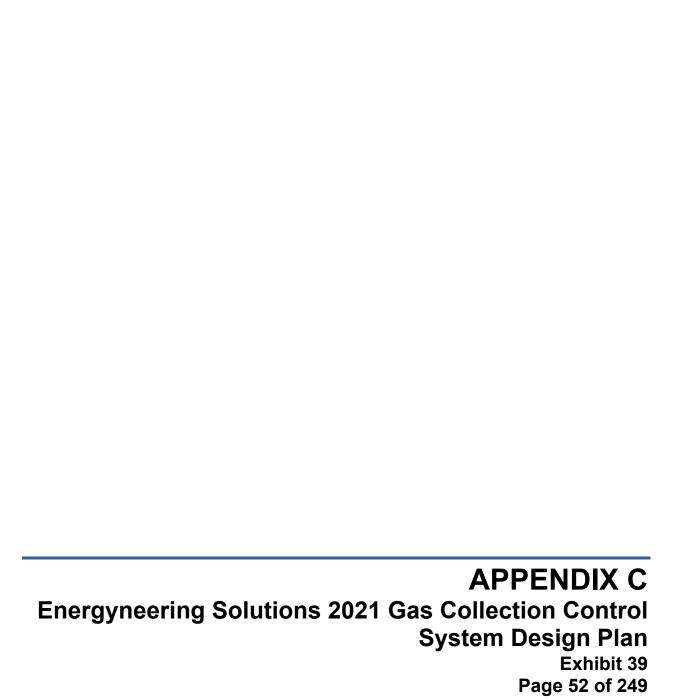

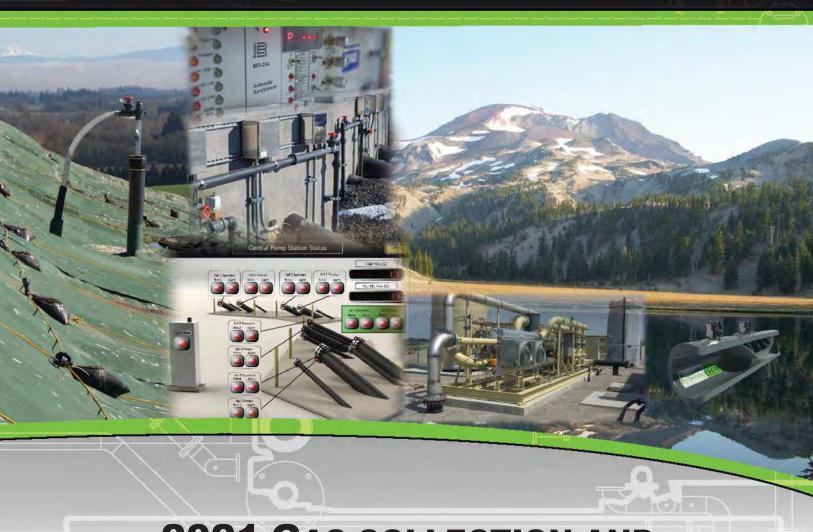

# 2021 GAS COLLECTION AND CONTROL SYSTEM DESIGN PLAN

FOR THE
COFFIN BUTTE LANDFILL

PRESENTED TO:



PREPARED BY:



December 2, 2021
Page 53 of 249



1	INTRO	DUCTION	3
	1.1	PURPOSE	3
	1.2	COMPLIANCE SUMMARY	3
	1.3	CERTIFICATION	3
2	EXISTIN	NG SITE CONDITIONS	3
	2.1	LANDFILL DESCRIPTION	3
	2.2	CURRENT GCCS	3
	2.3	CONTROL SYSTEM	4
3	FUTUR	E GCCS	5
	3.1	VERTICAL WELLS	5
	3.2	HORIZONTAL COLLECTORS	6
	3.3	LFG PIPING	6
	3.3.1	TRENCHING AND SLOPE	7
	3.4	WELLHEADS	
4		V CONSIDERATIONS	
4			
	4.1	DEPTH OF REFUSE	
	4.2 4.3	SOLID WASTE GAS GENERATION RATES AND FLOW CHARACTERISTICS	
	4.3.1	INTERIM COVER	
	4.3.2		
	4.4	LANDFILL GAS SYSTEM EXPANDABILITY	
	4.5	LEACHATE AND CONDENSATE MANAGEMENT	
	4.5.1	COMPRESSED AIR AND LIQUID CONVEYANCE	
	4.5.2	VERTICAL WELL PUMPS	9
	4.5.3	AIR COMPRESSOR	10
	4.6	COMPATIBILITY WITH FILLING OPERATIONS AND ACCESSIBILITY	10
	4.7	INTEGRATION WITH CLOSURE AND END USE	10
	4.8	AIR INTRUSION CONTROL	10
	4.9	CORROSION RESISTANCE	10
	4.10	RESISTANCE TO DECOMPOSITION HEAT	11
	4.11	FILL SETTLEMENT	11
	4.12	ISOLATION OF INDIVIDUAL COMPONENTS	11
	4.13	LANDFILL GAS EXTRACTION COMPONENT CONSTRUCTION	12
	4.13.1	MATERIALS	12
	4.13.2	2 COMPONENT SIZING	12
	4.13.3	COMPONENT LOADING	12
	4.13.4	SYSTEM EXPANSION	12

	4.13.5	COMPONENT PERFORATION	12
	4.13.6	AIR INFILTRATION	13
	4.14	LANDFILL GAS EXTRACTION COMPONENT INSTALLATION	13
	4.14.1	COMPONENT PLACEMENT	13
	4.14.2	LEACHATE	13
	4.14.3	WELLS AND HORIZONTAL TRENCH COLLECTORS	14
	4.14.4	COMPONENT SHORT CIRCUITING	14
	4.14.5	GRAVEL BACKFILL	14
	4.15	LANDFILL GAS EXTRACTION COMPONENTS CONNECTIONS TO LFG TRANSMISSION PIPING	14
5	CALCUI	LATIONS	15
	5.1	PIPE LOADING	15
	5.2	GAS GENERATION AND COLLECTION	
	5.2.1	WASTE TYPES	16
	5.2.2	METHANE GENERATION RATE AND METHANE GENERATION POTENTIAL	
	5.2.3	LANDFILL GAS GENERATION	
	5.3	RADIUS OF INFLUENCE AND WELL SPACING	
	5.4	LFG PIPE SIZING	18
	5.5	COMPRESSOR SIZING	19
6	OPERA	TIONS	20
	6.1	SURFACE EMISSION MONITORING	20
	6.2	EMISSION MITIGATION MEASURES	20
	6.2.1	INSTALLATION MITIGATIONS	20
	6.2.2	OPERATIONAL MITIGATIONS	20
	6.3	ASBESTOS AND NON-PRODUCTIVE WASTE	21
	6.4	ALTERNATIVE COMPLIANCE OPTIONS	21
	6.5	WELLHEAD SAMPLING	21
	6.6	WELL RAISING	21
	6.7	GCCS OPERATION	22
APP	ENDIX A	: GCCS MASTER PLAN	23
APP	ENDIX B	: LFG GENERATION MODEL (LANDGEM)	24
APP	ENDIX C	: PRESSURE LOSS CALCULATIONS FOR LFG HEADER AND LATERAL PIPING	25
APP	ENDIX D	: RADIUS OF INFLUENCE CALCULATIONS	26
APP	ENDIX E		
APP	LINDIX	: COMPRESSOR SIZING CALCULATIONS	27
		: COMPRESSOR SIZING CALCULATIONS: : SURFACE EMISSION MONITORING PLAN	
APP	ENDIX F		28



# 1.1 PURPOSE

The purpose of this document is to provide a design plan in accordance with the Oregon State Plan design requirements for the landfill gas (LFG) collection and control system (GCCS) at the Coffin Butte Landfill (CBLF). This document serves as the GCCS Design Plan and was prepared pursuant to OAR 340-239-0110. This GCCS Design Plan supersedes all other previously prepared GCCS Design Plan Submittals.

#### 1.2 COMPLIANCE SUMMARY

A summary of applicable regulations and implementation of these regulations at Coffin Butte Landfill is presented in Appendix H of this Design Plan.

#### 1.3 CERTIFICATION

This Design Plan for the GCCS at CBLF has been prepared by Energyneering Solutions (ESI), as authorized by Republic, which operates the GCCS at CBLF.

I certify that the GCCS as described in this plan meets the design requirements specified in OAR 340-239-0110. I further certify that this Design Plan was prepared by me or under my direct supervision, and that I am a duly registered Professional Engineer.

Benjamin Benson, P.E.

BengSem

Certifying Engineer

Oregon P.E. License No. 80443

OREGON

EXPIRES: 12/31/2021

# 2 Existing Site Conditions

#### 2.1 LANDFILL DESCRIPTION

Coffin Butte Landfill is located in Corvallis, in Benton County, Oregon. The landfill is owned and operated by Republic under Solid Waste Permit Identification Number 306 issued by the Oregon Department of Environmental Quality (DEQ). The landfill accepts municipal solid waste (MSW), construction and demolition landfill waste (CDL), and inert burn waste. The landfill began accepting waste in 1978 and has a design capacity of approximately 39.7 million tons at a projected closure date of 2041.

#### 2.2 CURRENT GCCS

An active GCCS is in place and operating and will be expanded as waste continues to be placed. As of 2021, CBLF has 312 active vertical extraction wells and horizontal collectors in total. Existing vertical extraction wells have a well spacing ranging from 150 to 200 feet throughout the fill area. Whenever possible, existing wells were installed along permanent benches and at edges of plateaus. These locations made them easier to maintain, monitor, and install; additionally, this ensured the wells stayed out of the way of site filling operations. In other cases, some vertical wells and horizontal collectors were extended, replaced, or decommissioned as needed according to operation and compliance needs.

The elevation difference between ground surface and the operational layer at all wellhead locations is at a minimum 55ft (i.e. wells were not be drilled in waste less than 55ft deep), and there is a minimum of 15ft between the bottom of each well and the operational layer to ensure the liner is protected. All other vertical wells are drilled to their maximum depth to facilitate liquid collection and drainage to the base of the landfill. Where gravel chimneys or gabion baskets have been installed at the base of a cell, vertical wells are drilled to the top of the chimneys to encourage liquid drainage and collection. Borehole drilling locations were specified with coordinates by the Engineer in detailed designs. The selected drilling Contractor sent surveyed and staked well locations to the Engineer prior to drilling so that waste depths could be verified

Permanent lateral and header pipes were installed below grade and were constructed of high-density polyethylene (HDPE) pipe. Temporary piping was installed either above or below grade to accommodate ongoing waste placement operations as needed. LFG is currently conveyed through this pipe network to the electrical generation plant and backup utility flares, located southeast of the disposal area.

Condensate that forms in the GCCS piping is discharged to the leachate collection system (LCS) via direct connections to LCS clean/access riser or to condensate pump stations located around the perimeter of the disposal area. Condensate drained by gravity to the condensate pump stations is discharged through a force main(s) to the LCS. Condensate collected in condensate drains is transported via gravity directly to the LCS via leachate system access risers. The condensate is disposed of coincidentally with landfill leachate in accordance with the requirements of the facility Solid Waste Permit.

Additional information and drawings of the GCCS are included in Appendix A.

#### 2.3 CONTROL SYSTEM

Currently, the landfill directs its LFG to an electrical generation plant owned and operated by the Pacific Northwest Generating Cooperative (PNGC) which consists of three 3516 Caterpillar engines each capable combusting of approximately 287 scfm and two 3520 Caterpillar engines each capable of combusting approximately 527 scfm each and has the ability for further expansion.

The PNGC facility has two backup utility flares for handling excess LFG. The blower skid and flare system equipment are located on the southeastern corner of the landfill. The complete system includes two LFG blowers and two candlestick flares with a combined 3,000 scfm capacity. One 2000 scfm capacity flare was installed with the initial GCCS, while an additional 1000 scfm flare was installed in 2015 after the LFG flow to the flare station rose following GCCS expansion. As of 2021, the flare station currently has a combined flow approximately 2000-2200 scfm with the remainder of the collected LFG being utilizes by the power generation facility that has up to 95% annual generation capacity.

The flares are designed to reduce NMOCs by 98 percent weight or reduce the outlet NMOC concentration to less than 20 parts per million by volume, dry basis as hexane at 3 percent oxygen, which meets 40 CFR (60.752(b)(2)(iii)(B)), but not OAR 340-239-0110 (2)(b)(A) which requires a methane destruction efficiency of at least 99 percent by weight. Both current flares are equipped with continuous temperature recorders and flowmeters which meet the requirements of OAR 340-239-0110 (2)(c)(A)(i) and OAR 340-239-0110 (2)(c)(A)(i).

In accordance with OAR 340-239-0110 (2)(c)(A)(ii)(I) the flare exhaust temperatures and LFG flow rate are monitored continuously. The flare exhaust temperature is monitored using a thermocouple installed at the flare tip. The LFG flow rate is measured using an orifice plate, installed along the LFG piping, downstream of the blowers. The utility flare is constantly monitored for the presence of a flame, indicating that combustion is occurring. Monitoring for the presence of a flame is accomplished by an ultraviolet flame scanner, thermocouple, or comparable device. In the event that a flame is not detected, indicating that the combustion process has been disrupted, the monitoring system will automatically:

• Cut power to the LFG blowers, and;

• Initiate the closure of a pneumatic-activated valve at the inlet to the blowers. There is no bypass around the control device.

Stopping the blowers will cause the LFG extraction process to cease. Closing the inlet valve to the blowers will eliminate the potential for direct venting of LFG through the control device system.

The backup utility flare consists of a 2,000 scfm capacity skid mounted utility flare system manufactured by LFG & E International in order to provide additional LFG control capacity. The utility Triton flare, model CF-2000, is 10-inch diameter and approximately 31-feet tall. The skid-mounted utility flare system also features a fail-closed valve, a main condensate knockout, a flow meter, a 2,000 scfm capacity New York blower, and a control valve for the blower. The blower is a single stage fan blower with direct drive 30 HP, 480 V AC, three phase motor, and shall be capable of generating 50 inches water column (W.C.) inlet vacuum and 15 inches W.C. discharge pressure.

In the event that LFG extracted from the landfill exceeds the capacity of the control systems, additional control mechanisms will be installed. These additional control mechanisms may include, but are not limited to, upgrading the existing control devices or installation of other beneficial-use facilities.

Visual inspections of all control mechanisms associated with the control system are performed monthly.

# 3 FUTURE GCCS

The Coffin Butte Landfill will continue to place waste in accordance with the solid waste permit. Installation of additional GCCS components is anticipated to be coordinated with fill development and as required by DEQ regulations regarding installation of GCCS components stipulated in OAR 340-239-0110: Gas Collection and Control System Requirements. Due to operational changes, the GCCS design plan presented in Appendix A may be altered to maintain compliance with the provisions of the DEQ and to accommodate actual field conditions at the time of construction.

#### 3.1 VERTICAL WELLS

Vertical wells will be constructed of 6" diameter schedule 40 carbon steel or HDPE piping. Perforations of vertical wells will be at a suitable depth to prevent air intrusion, as calculated in Section 5.3. The borehole for vertical wells will be a minimum of 3ft in diameter with washed non-calcareous stone fill made up of stone from 1-3 inches in size. The borehole will have bentonite plug between the stone backfill and soil cover, as well as a secondary bentonite plug within the soil cover, to prevent migration of gas through the borehole. Where the wellhead comes above the landfill's cover tarping, a geomembrane boot will be installed. Vertical well material, size, connections, and backfill may be modified; however, vertical wells will maintain compliance to OAR 340-239-0110(1) and OAR 340-239-0110(2).

The elevation difference between ground surface and the operational layer at all wellhead locations will at a minimum be 55ft (i.e. wells will not be drilled in waste less than 55ft deep), and there will be a minimum of 15ft between the bottom of each well and the operational layer to ensure the liner is protected. All vertical wells will be drilled to their maximum depth, within the bounds described previously, to facilitate liquid collection and drainage to the base of the landfill. Where gravel chimneys or gabion baskets have been installed at the base of a cell, vertical wells will be drilled to the top of the chimneys to encourage liquid drainage and collection. Borehole drilling locations will be specified with coordinates by the Engineer in detailed designs. The selected drilling Contractor will send surveyed and staked well locations to the Engineer prior to drilling so that waste depths can be verified.

To maximize vertical well life, wells will only be drilled in areas of final, or interim final fill. Wells installed in interim final fill areas are designed to maximize collection from an area that will remain undisturbed for many years and will only be placed in areas with adequate waste depth. Eventually, as filling in these areas resumes, the wells will need extended or replaced to continue providing adequate collection.

Whenever possible, wells will be installed along permanent benches and at edges of plateaus. These locations will make them easier to maintain, monitor, and install; additionally, this will ensure the wells stay out of the way of site filling operations. Vertical wells will be spaced to ensure adequate LFG collection density in accordance with OAR 340-239-0110(1)(c)(J); spacing determination is further described in Section 5.3.

ESI is currently evaluating performance of carbon steel vertical well casing which have been installed over the previous few years. An adaptive design process should consider long term performance of all casing materials installed at this site to ensure the materials used provide the highest probability of long-term success.

Minimal corrosion of the carbon steel casings have been observed to date and no steel casings have collapsed under the forces of waste settlement. As a tentative plan, it is intended to continue installing carbon steel casings when installation is along a permanent side slope. The top 3 feet of these steel casings is to be an extension of SDR 11 HDPE to allow for wellhead lowering as necessary based on settlement. When vertical extraction wells are planned for installation on an intermediate slope, casing material should be reviewed on a case-by-case basis to determine if the cost of carbon steel casings is justified based on the anticipated life span for the installed location.

A typical vertical extraction well detail is shown on drawing sheet M3.01 in Appendix A. Carbon steel and PVC casings are to be slotted per Detail C shown on drawing sheet M3.08. HDPE casings, if used, are to be perforated per Detail D on the same drawing sheet. Carbon steel casings will be evaluated to see how the material performs for 10 or more years of use.

#### 3.2 HORIZONTAL COLLECTORS

Horizontal collectors will be constructed of 6" diameter HDPE DR11. Collectors will be centered within a trench, a minimum of 2ft wide and 3ft deep, backfilled with washed non-calcareous stone (1-3 inches in size). A bentonite plug will be installed at the transition from solid to perforated pipe and a geomembrane boot provided where the pipe comes above the landfill cover tarping. Whenever possible, horizontal collectors will be designed to drain liquid back into the landfill, rather than out through wellheads. Like the vertical well design, horizontal collector design is subject to modification but will maintain compliance to OAR 340-239-0110(1) and OAR 340-239-0110(2).

As has been done previously in the existing GCCS, horizontal collectors will be used between waste lifts and in shallower areas of fill. These collectors will have a minimum 100 ft distance from perforated pipe to the edge of fill and will be spaced at 100ft from each other. They will typically not be collected from until there is at least 30ft of waste placed above them or otherwise sufficient LFG generation. Horizontal collectors will act as surface collectors if necessary, and the GCCS may be expanded by adding horizontal collectors near the perimeter of waste to prevent offsite migration as per OAR 340-239-0110(1)(c)(J). By following these guidelines for horizontal collectors, air intrusion will be prevented, and anaerobic decomposition promoted. Horizontal collectors are not shown on the master plan layout for clarity.

#### 3.3 LFG PIPING

All lateral and header LFG piping will be butt fusion welded HDPE at a minimum thickness of SDR 17. Piping will be sized, as specified in Section 5.4, to maintain a adequate vacuum of at each wellhead, even during maximum expected LFG generation; the current blowers will be required to run at their full capacity, 50" W.C., to do this. As discussed in Sections 4.8 and 4.9 HDPE header and lateral piping will be suitably resistant to corrosion and to decomposition due to heat meeting requirement OAR 340-239-0110(2)(a)(I). The LFG piping will be installed in a manner that minimizes obstruction of filling operations as discussed in Section 4.6. Header and lateral piping will be in regions that have reached final fill unless the piping is specified as temporary in designs. When piping is temporary or in specific cases outlined in GCCS designs, it may be necessary to install piping above grade; however, the majority of LFG piping will be installed in a trench as discussed in Section 3.3.1.

# 3.3.1 Trenching and Slope

According to the US Army Corps of Engineer's Landfill Gas Collection and Treatment Systems Engineer Manual, when header pipe is within the Landfill boundaries, it should be on a 2% grade when condensate flow is in the same direction as LFG flow and a 4% grade when condensate flows opposite to LFG. This grade prevents differential settlement in the Landfill from causing low spots in the header piping. Considering this recommendation and ESI's experience, a 3% grade was selected for header and lateral piping at the Landfill to allow condensate drainage to the appropriate in-line condensate sumps located at low points and other strategic locations throughout the Landfill. A survey of the LFG piping path will be submitted to the Engineer during all construction projects by the Contractor so elevation and location can be verified.

Header and lateral piping will be buried with two strips of warning tape buried 3-6" above it; piping will be spaced 6" from any other pipes if it is in a shared trench. Pipe trenches will be backfilled with sand bedding that will support the pipe in resisting vertical loads. Each pipe will be buried at a minimum of 1 ft from pipe crown to the surface except where the LFG header crosses a bench in the landfill, in final closure areas, or when an above ground stub-up is specified in design drawings.

#### 3.4 WELLHEADS

Vertical wells and horizontal collectors will each have a wellhead comprised of, at minimum, a positive closing throttle valve and at least two sampling ports, as specified in OAR 340-239-0110(2)(a)(K). As feasible, new wellheads will be installed, and existing wellheads retrofitted, with flow meter devices and separate temperature sampling ports to ensure accurate flow readings. Standard wellhead pipe sizing will be 2"; wellhead sizing may be increased or decreased to accommodate unique flow conditions at specific wells. Well heads will be constructed of PVC, HDPE, fiberglass, stainless steel, or other nonporous material of suitable thickness.

#### 4 Design Considerations

Design considerations meet the requirements of OAR 340-239-0110(1)(c)(A), below, as described in Sections 4.1 through 4.15. Each GCCS design will be certified to achieve comprehensive control of surface gas emissions by a professional engineer before GCCS construction takes place.

OAR 340-239-0110(1)(c)(A) The Design Plan must be prepared and certified by a professional engineer. The following issues must be addressed in the design: Depths of solid waste, solid waste gas generation rates and flow characteristics, cover properties, gas system expandability, leachate and condensate management, accessibility, compatibility with filling operations, integration with closure end use, air intrusion control, corrosion resistance, fill settlement, resistance to the solid waste decomposition heat, and ability to isolate individual components or sections for repair or troubleshooting without shutting down entire collection system.


The GCCS has been designed to be consistent with DEQ requirements to achieve comprehensive control of both lateral migration and surface emissions of LFG.

Issues related to compliance with OAR 340-239-0110 (1)(c)(A) are discussed in the following sections.

Applicable information used in the design of the GCCS is included in Appendix A (GCCS Master Plan), Appendix B (LFG Generation Model), Appendix C (Pressure Loss Calculations in LFG Header and Lateral Piping), Appendix D (Radius of Influence Calculations), Appendix E (Compressor Sizing), Appendix F (Surface Emissions Plan), and Appendix G (Alternative Operation and Monitoring Plan).

#### 4.1 DEPTH OF REFUSE

The GCCS master plan incorporates vertical gas extraction wells for regions of the landfill with at least 55-70' of waste depth. Horizontal gas collectors will be used throughout the landfill and placed between waste lifts to provide gas collection in the shallower regions of fill and in areas of active fill. As described in Section 3.1, there will be at least 15' between the operational layer and the bottom of each vertical well's borehole.



#### 4.2 Solid Waste Gas Generation Rates and Flow Characteristics

The maximum expected LFG flow rate for the site was used for sizing the GCCS. The LFG generation rate calculations were performed using the United States Environmental Protection Agency (EPA) Landfill Gas Emission Model (LandGEM) (values- k=0.04/year and  $L_0=80$  m<sup>3</sup>/Mg), historical waste receipts and the permitted design capacity of the facility. The maximum LFG generation rate projected to be approximately 6900 scfm.

The LandGEM emissions model is a design tool which uses the information available to project future operating conditions. This model was developed based upon operating conditions at a cross-section of landfills within the United States and is approved for use by the EPA. Actual operating parameters may dictate changes in the system flow characteristics and process equipment as the system is developed. The LandGEM model meets the requirements of OAR 340-239-0110(2).

LFG generation variables are discussed in Section 5.2 and LFG projections. The complete 2021 LandGEM report provided in Appendix B.

## 4.3 LANDFILL COVER PROPERTIES

The final cover design will incorporate a composite geosynthetic/low permeability soil barrier. The primary purpose of the final cover system units is to prevent precipitation infiltration that would generate additional leachate. However, the final cover system design also provides a significant barrier to LFG emission and air infiltration when combined with an active LFG extraction system. The GCCS will provide components for collecting LFG and relieving pressures from LFG from beneath the landfill covers.

#### 4.3.1 Interim Cover

The size of the active operational areas of the Landfill is controlled using interim covers consisting of temporary plastic tarps. The interim soil cover, where used, will typically be a minimum of 12-inches thick. The temporary plastic covers are typically 12-mil, lightweight plastic with a nylon reinforcing scrim or 45-mil ethylene propylene diene monomer (EPDM) rubber. EPDM sheets are available in panels up to 200 feet by 200 feet. The cover material is held down by sandbags placed on a spacing of approximately 10 feet or anchored with specialized earth anchors in the case of EPDM cover. Sheet seams are sewn together, taped, or made by overlapping the sheets and placing sandbags along the seam. The seams will be shingled down slope to properly shed water. The interim cover will facilitate the control of landfill gas prior to final cover being put in place.

# 4.3.2 Final Cover

The final landfill cover inhibits the infiltration of stormwater and the migration of landfill gas. This cover will be installed periodically during the operating life and the closure of the Landfill. The final cover will consist of:

- An under-drainage layer to allow collection of landfill gas and control of landfill seeps.
- 24" of compacted low permeability soil having a maximum hydraulic conductivity of 1x10-5 cm/s.
- Geomembrane, most-likely a 60-mil linear-low density polyethylene (LLDPE) or other approved geomembrane.
- Drainage layer, either 12 inches of gravel or a geocomposite drainage layer

- Plantings, which would include a diverse grass/forb seed mix of native species, shallow-rooted shrubs, and limited areas of mixed forest where topsoil would be deep enough to ensure the integrity of the cover system.

In areas of the landfill under final cover, LFG collection efficiency is expected to increase to as much as 90% due to enhanced effectiveness of the cover to limit air infiltration and LFG emissions. Sections of the landfill already at final grade are currently covered with a LLDPE geomembrane.

#### 4.4 LANDFILL GAS SYSTEM EXPANDABILITY

Expandability of the GCCS is achieved by installing tees with blind flanges along the transmission piping or providing expansion capabilities for additional LFG control devices. These flanges or expansion points provide planned access for expansion of the LFG transmission piping and LFG control device facility(s) in the future. Coffin Butte Landfill may require the installation of supplemental GCCS components to comply with State and Federal regulations at some point in the future. If that need is determined, an alteration will be submitted to the DEQ for review and concurrence prior to the installation of those components. Any needed design component will be installed and operational no later than 60 days after the date on which the area requires control.

#### 4.5 LEACHATE AND CONDENSATE MANAGEMENT

Condensate generated in header, lateral, and horizontal collector piping will maintain drainage from landfill high points to condensate and leachate sumps or leachate cleanouts and drains installed at low points in the Landfill. The current GCCS system includes condensate sumps at low points in the header piping, which will be utilized in future GCCS designs. As shown on the GCCS Master Plan, all LFG piping will slope towards a condensate pump. If necessary, sumps will be upsized to handle condensate for the Landfill. Additional sumps may also be installed if low points are encountered in future designs.

Leachate is pumped from the LCS to an onsite pond for storage. As warranted, leachate is trucked off site for permanent disposal. The LCS is designed according to Subtitle D standards (40 CFR§257 and §258) and is part of the Solid Waste Disposal Permit.

# 4.5.1 Compressed Air and Liquid Conveyance

2" diameter SDR 9 HDPE piping will provide compressed air to pneumatic pumps for dewatering vertical wells and sumps. The piping will be in a shared trench with the LFG and liquid conveyance piping (see next paragraph) wherever possible to limit the amount of trenching needed in each GCCS design. The compressed air line will stub-up at each vertical well with an isolation valve for isolating individual pumps. The compressed air line will also have isolation and blow-off valves installed at strategic locations in the Landfill. Blow-off valves will allow the compressed air line to be cleaned out and the pressure to be released if necessary.

A 4" diameter liquid conveyance line will stub-up with an isolation valve at each vertical well, along with every compressed air line stub-up. Like the compressed air line, the liquid conveyance line will share a trench with LFG piping whenever possible. Liquid conveyance cleanouts will be installed in the piping every 200ft, comprised of wye-fittings, ball valves, and camlock fittings. Cleanouts are included with these features and at this quantity to allow for easy access to every point in the piping for cleaning by vacuum trucks and water trucks.

#### 4.5.2 Vertical Well Pumps

Leachate extraction pumps in vertical wells will be pneumatic. The pump will operate using the compressed air line with an in-line regulator and will discharge into the 4" liquid conveyance line. This type of pump was selected because it is commonly used for landfill vertical well leachate pumping and can easily be integrated into the liquid conveyance and compressed air lines. The pump will be of a diameter is so that it will fit within the 6" carbon steel or HDPE pipe used for vertical wells. The pump will also be installed with a stabilizer

LFG well cap that will allow the pump to be easily accessible. The pump model selection is subject to change in future designs depending on the site and well specific pumping requirements

# 4.5.3 Air Compressor

In 2021, CBLF installed a Sullair 3709VB Series 50 HP rotary screw compressor to replace the former model Sullair ST2208 30 HP screw compressor. This larger compressor has a typical lifetime of 15 years and is capable of supplying enough air to operate all proposed pneumatic leachate extraction pumps cycling simultaneously. For more information regarding compressor sizing, please refer to Section 5.5

#### 4.6 COMPATIBILITY WITH FILLING OPERATIONS AND ACCESSIBILITY

Accessibility to the GCCS components is achieved by installing commonly accessed components (such as wellheads and monitoring ports) on relatively flat surfaces of the landfill or near the landfill's road network. Wellheads, piping risers, valves and monitoring ports will be installed above grade, or within vaults, to maintain accessibility.

At the time of this report, an active GCCS has been constructed and is operating in the Coffin Butte Landfill. Future additions or expansions of the GCCS will be designed to integrate the existing GCCS components currently operating at the Coffin Butte Landfill. As refuse filling operations proceed and portions of the site reach final or near-final grades, additional GCCS components will be installed. This method of installation allows GCCS components to be constructed while minimizing interference of the GCCS with ongoing filling operations.

#### 4.7 INTEGRATION WITH CLOSURE AND END USE

Currently, the post-closure end-use for the site is unspecified and will likely be utilized as open space. Any modifications to the closure end-use must be approved by Coffin Butte Landfill personnel to evaluate their compatibility with the GCCS. Any items of concern related to maintaining and operating the GCCS will be mitigated by either altering the proposed post-closure end-use or by adjusting or modifying the GCCS in accordance with DEQ requirements.

# 4.8 AIR INTRUSION CONTROL

Air intrusion will be minimized throughout the entire Landfill by the interim cover and the final cover described in Section 4.3. Where collectors, wells, or piping pass through the cover, a geomembrane boot will be used to prevent these regions from becoming an air intrusion source. Monthly well tuning and regular maintenance of the cover will also be essential in preventing air intrusion. The radius of influence of vertical wells, which is described in Section 5.3, was used to determine the length of solid pipe and determine a recommended vacuum for wells both on waste plateaus and slopes. By using both these values, the potential for air intrusion due to overpulling at wells will be minimized

#### 4.9 CORROSION RESISTANCE

Corrosion resistance of the GCCS is achieved through the use of corrosion resistant materials or materials that have a corrosion resistant coating. The primary components used in the construction of the GCCS are high density polyethylene (HDPE) and polyvinyl chloride (PVC) piping. All HDPE piping will have a minimum rating standard dimension ratio (SDR) of 17. All PVC piping will have a minimum rating of Schedule 40. Components will be inspected during routine GCCS monitoring for abrasion, chipping, or other potential deterioration of the components. If damage to the materials is observed that may be detrimental to the performance of the GCCS, the components will be replaced or repaired.

#### 4.10 Resistance to Decomposition Heat

Resistance of the GCCS to the heat generated as a result of refuse decomposition was achieved through the use of materials tested and proven to withstand temperatures well above those typically found in landfills. The GCCS will be inspected during routine LFG system monitoring for heat damage. If heat damage of the GCCS components is observed and is believed to be detrimental to the operation of the GCCS, the cause of the elevated landfill temperature will be investigated and the GCCS will be adjusted or modified to mitigate the effects of the elevated temperatures.

The primary point of observation during routine LFG system monitoring will be at the individual wellheads. Each wellhead possesses either an integral thermometer or a connection for the use of portable thermometer. The extraction wells will generally be operated at temperatures of less than 131 °F unless an alternative temperature parameter is approved for an individual monitoring point. All wellhead components are visually inspected, and the control valve and monitoring connection physically exercised during each monitoring event, to insure free operation of the components.

In the event that the monitored LFG temperature exceeds 150°F, the well casing will be inspected via fiber optic camera or other suitable means to ensure that the integrity of the casing has not been compromised. Vertical extraction well casings will be constructed of schedule 40 carbon steel. Legacy casings may be schedule 80 PVC or HDPE. A compromised PVC or HDPE casing will typically show signs of physical deformation or internal "bulges" if excessive heat has been applied for a prolonged period of time. In the event that damage has occurred that negatively impacted the operations of the extraction well, the DEQ will be notified and a remedy for that extraction point proposed for review and concurrence.

Since the LFG stream cools as it is drawn through the piping system, the lateral and header piping will be exposed to relatively cooler gas temperatures than will the extraction wells and wellheads. These components will be inspected only in the event that a surface fire or other disturbance is observed.

#### 4.11 FILL SETTLEMENT

Settlement will occur due to decomposition of the refuse. To accommodate refuse settlement, the GCCS components will be designed and installed with several features to account for this settlement, including:

- LFG extraction wellheads connected to the LFG transmission piping via a flexible pipe or hose connection. This allows the LFG piping to accommodate changes in the orientation of the LFG transmission piping or LFG extraction well.
- LFG transmission piping sloped at sufficient grades (a minimum 3.0 percent within the waste limits, and 0.5 percent outside the waste limits) so that reasonable amounts of differential and total settlement may occur without causing pipe breakage or disrupting the overall flow gradient of the LFG transmission piping.
- HDPE piping used for the construction of the header piping and transmission system. HDPE piping is flexible and absorbs differential settlement without breaking or cracking.

#### 4.12 ISOLATION OF INDIVIDUAL COMPONENTS

The GCCS will be designed to include isolation valves at gas header, air, and liquid forcemain junctions and branches so as to allow for the ability to isolate individual components or sections for repair or troubleshooting without shutting down the entire collection system

#### 4.13 LANDFILL GAS EXTRACTION COMPONENT CONSTRUCTION

OAR 340-239-0110(2)(I) The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations must be situated with regard to the need to prevent excessive air infiltration.

Design considerations related to compliance with OAR 340-239-0110(2)(I) are discussed in the following sections:

#### 4.13.1 Materials

The GCCS components will be constructed of PVC, HDPE, fiberglass, corrosion resistant steel, Neoprene (gaskets and seals) and other non-porous corrosion resistant materials.

# 4.13.2 Component Sizing

The final development piping network, blowers, and flares are sized for a maximum estimated flow of 6,900 scfm with the ability for expansion. The GCCS facilities will be expanded as needed to handle 6,900 scfm as estimated by the EPA LandGEM emissions model. This accounts for the entire disposal area, at the final grade development elevations of the landfill. Capacity of the extraction and treatment system components will be phased in as LFG generation and extraction rates increase. Please see Section 3.5 for full discussion of the control systems.

#### 4.13.3 Component Loading

The GCCS components were designed to withstand the estimated installation, static, settlement, overburden, and traffic loads. Installation loads were determined to be insignificant for GCCS components (PVC, HDPE, and carbon steel) based on the installation methods used. Static loads from the vacuums applied to the GCCS components and applied loads on the GCCS were both evaluated. Vacuum loads required for the GCCS operation were compared to, and found to be less than, the allowable vacuum loads for the GCCS components. Foundations used for GCCS components were designed to handle the applied loads. The applied loads on GCCS components within the landfill, as well as settlement forces, cannot accurately be predicted due to the non-homogeneous nature of the refuse within the landfill.

The GCCS components within the landfill are consistent with those at other landfills that have been in place for extended periods of time (in excess of 15 years) and verified to withstand applied static and settlement forces. Overburden and traffic loads for the LFG transmission piping are less than the allowable loads recommended by the piping manufacturer.

#### 4.13.4 System Expansion

The GCCS shall be expanded as necessary to comply with DEQ requirements. The Coffin Butte Landfill will conduct monitoring and document compliance of the GCCS, in accordance with DEQ requirements. If the GCCS at the Coffin Butte Landfill does not meet the measures of performance set forth by DEQ, the GCCS will be adjusted or modified in accordance with DEQ requirements.

## 4.13.5 Component Perforation

The vertical well and interim horizontal trench collector elements will be perforated as shown on the design plans (Appendix A) or as approved by the design engineer at the time of installation, to allow LFG entry

without inducing head losses sufficient to impair performance across the intended extent of control. The perforation patterns used for the Coffin Butte Landfill GCCS design have been successfully used in previous LFG control applications.

# 4.13.6 Air Infiltration

The LFG collection elements were designed to prevent excessive air infiltration through the use of solid pipe and solid backfill near the ground surface for vertical LFG extraction wells and interim horizontal trenches in the perimeter slope area. Hydrated bentonite plugs and geomembrane seals, if warranted, will be provided around vertical well casings and interim horizontal trench access piping, where they penetrate the landfill final cover or interim cover systems. Further, air intrusion control will be accomplished through monitoring of the standard operational procedures (SOP) for the LFG collection elements in accordance with DEQ and NSPS requirements. If the GCCS does not meet the SOP, it will be adjusted or modified in accordance with DEQ and NSPS requirements.

Near surface collectors may be used on occasion to prevent surface emissions and are approved for operation with higher than normal oxygen readings.

# 4.14 LANDFILL GAS EXTRACTION COMPONENT INSTALLATION

OAR 340-239-0110(2)(J) Vertical wells must be placed so as not to endanger underlying liners and must address the occurrence of water within the landfill. Holes and trenches constructed for piped wells and horizontal collectors must be of sufficient cross-section so as to allow for their proper construction and completion including, for example, centering of pipes and placement of gravel backfill. Collection devices must be designed so as not to allow indirect short circuiting of air into the cover, into the solid waste, into the collection system, or gas into the air. Any gravel used around pipe perforations should be of a dimension so as not to penetrate or block perforations.

Design considerations related to compliance with OAR 340-239-0110(2)(J) are discussed in the following sections:

# 4.14.1 Component Placement

Depths of refuse were calculated, at the time of the design of the GCCS, based upon the permit plan final grades and record documentation of landfill liner grades. Vertical LFG extraction wells will be designed to extend from the landfill surface to a maximum depth of 15 feet above the landfill base. Any changes made to borehole depths during design or construction must be verified and acknowledged by the following representatives: QA/QC Reviewer, Design Engineer, CQA Inspector, Environmental Manager, Surveyor, and Driller. Under no circumstances shall drilling begin without providing all the aforementioned signatures. Any changes to well location or depth shall require signatures to be obtained again.

#### 4.14.2 Leachate

The occurrence of leachate within the landfill will be addressed by the LCS as stated in Section 4.5 of this Design Plan. Leachate management within the landfill with a composite liner will be accomplished through the LCS which includes a leachate drainage layer, perforated collection piping, side slope risers with liquid pumping equipment, and liquid storage and disposal systems. A force main could then be used to convey the extracted liquids to the leachate storage facilities

If free liquids are encountered, the drilling contractor will attempt to drill through the perched zone of liquids allowing drainage into the underlying waste mass and the LCS. In the event that the zone of perched liquids cannot be penetrated, the well installation may be terminated. If necessary, appropriate measures will be taken to complete the well installation procedure at a nearby location.

If perched liquids are observed within the extraction wells after installation, and it is determined that the liquid level is restrictive to efficient LFG extraction, attempts may be made to reduce the leachate level. This

is typically accomplished by periodic pumping of the liquids using either electric or pneumatic pumping systems. Liquids removed from the well casings will be discharged to the LCS.

# 4.14.3 Wells and Horizontal Trench Collectors

Vertical wells and interim horizontal trench collectors, constructed for LFG collection elements, are of sufficient cross-section to allow for their proper construction and completion, including centering of the pipes and placement of gravel backfill. The wells and interim trenches will be constructed under supervision of a construction quality assurance program implemented by the Coffin Butte Landfill and verified to be properly constructed, as indicated on the design plans in Appendix A.

## 4.14.4 Component Short Circuiting

LFG collection elements are designed to prevent air infiltration through the cover, refuse contamination of the collection elements, and direct venting of LFG to the atmosphere. Air intrusion control will be verified through monitoring of LFG quality at the extraction components (note exemption for near surface collectors in Section 4.13.6), monitoring of surface emission levels and maintenance of the landfill cover in accordance with DEQ requirements. Separation of the collection elements from the refuse is accomplished by placing gravel backfill in the annular borehole space around extraction wells casings and the interim horizontal trench pipes, providing a filter pack between the refuse and the LFG collection elements. Direct venting of the LFG to the atmosphere is avoided by operating the GCCS under a controlled application of vacuum and the quarterly monitoring of surface emissions.

## 4.14.5 Gravel Backfill

Gravel of sufficient size is specified to prevent penetration or blockages of the LFG collector pipe perforations. Gravel (non-calcareous) to be utilized will be a nominal 1 to 3-inch in size.

## 4.15 LANDFILL GAS EXTRACTION COMPONENTS CONNECTIONS TO LFG TRANSMISSION PIPING

**OAR 340-239-0110(2)(K)** Collection devices may be connected to the collection header pipes below or above the landfill surface. The connector assembly shall include a positive closing throttle valve, any necessary seals and couplings, access couplings and at least one sampling port. The collection devices shall be constructed of PVC, HDPE, fiberglass, stainless steel, or other non-porous material of suitable thickness.

The collection devices are connected to the collection header pipes using lateral piping. The lateral piping will be connected to the header piping either above or below the landfill surface, as required by field conditions at the time of installation. The connector assemblies and collection devices (vertical extraction wellheads) are detailed in section 3.4 of this design plan.

# 5 CALCULATIONS

The calculations described in this section serve to support the GCCS Design in Section 3 and the design considerations in Section 4.

#### 5.1 PIPE LOADING

In addition to their suitability to resisting corrosion and decomposition due to heat, the GCCS components must withstand loading due to installation, static, and settlement forces as well as overburden or traffic loads per OAR 340-239-0110(2)(a)(I). Installation forces are negligible for the PVC and HDPE pipe selected as well as pressure due to applied vacuum within piping. The static pressure due to waste was determined at a depth of 230ft, which is the difference in elevation between the current surface and the well with the highest elevation per the GCCS Master Plan. Using a waste density of 2,000 lb/yd³ and the equation below, the maximum pressure in a vertical well was determined to be 118.3 psi. The maximum pressure was then compared to the collapse pressure for Schedule 80 PVC, which is 343 psi for 6" diameter pipe. This result indicates the static loading will not cause pipe collapse even at the deepest regions of fill.

$$P = \rho D$$

where,

P = Static pressure, 
$$\varrho$$
 = Waste density, D = depth of waste

The pipe is assumed to be capable of resisting most settlement forces due to the materials use historically in Landfills. However, there is no accurate way to predict what settlement forces will be. Vertical extraction well casings are to be made of 6" schedule 40 carbon steel, which has a collapse pressure significantly higher than the PVC used in the above calculation. By installing most GCCS piping and vertical wells in areas that have reached final fill, the overall loading on the GCCS due to settlement will be reduced as some of the initial waste settlement will have occurred prior to pipe installation. Resistance of header and lateral piping to traffic loads will be considered on a case-by-case basis and will depend on the depth of pipe burial and weight of traffic loads. If necessary, corrugated metal or ductile iron pipe will be used to carry the gas collection piping and provide resistance to loads.

# 5.2 GAS GENERATION AND COLLECTION

As stated in 340-239-0110(1)(c)(C) the gas mover equipment must "be designed to handle the maximum expected gas flow rate from the entire area of the landfill that warrants control over the intended use period of the gas control or treatment system equipment". Because a gas collection and control system is already in place at Coffin Butte Landfill, actual flow data may be used to project the maximum expected gas generation flow rate along with the equation from 40 CFR 60.755(a)(1)(ii):

$$Q_m = \sum_{i=1}^n 2kL_0 M_i(e^{-kt}i)$$

where,

 $Q_m$  = maximum expected gas generation flow rate, cubic meters per year  $L_0$  = methane generation potential, cubic meters per megagram solid waste k = methane generation rate constant, year<sup>-1</sup>  $M_i$  = mass of solid waste in the  $i^{th}$  section, megagrams  $t_i$  = age of the  $i^{th}$  section, years

The EPA's Landfill Gas Emissions Model was used for projecting maximum LFG generation rates. The results of the LandGEM model ran for CBLF is shown in Appendix B.

# 5.2.1 Waste Types

The LandGEM uses the waste placed each year, historically and in the future, as an input, which is represented by M<sub>i</sub> in the equation above. Waste totals and waste composition for each year were provided by Republic and previous LandGEM models for CBLF. It was assumed that the future waste composition would remain the same as the current composition and that the Landfill would take in approximately 800,000 tons of waste each year. The waste was split into five different categories for the LandGEM: MSW (70.5%), Special Wastes (8%), Construction & Demolition (CDL) (3%), Organics (3%) and Inert (15.5%).

#### 5.2.2 Methane Generation Rate and Methane Generation Potential

In 2021, The LandGEM was calibrated to determine past and future gas generation rates at the Landfill using a bulk waste model that was composed from an amalgamation of sperate gas generation curves from each specific waste stream accounted for at the Landfill.

Coffin Butte Landfill accepts predominantly MSW waste, but also has a significant waste influx from burn waste and construction and demolition debris due to forest fires in the area. These waste streams contribute less to gas generation than typical MSW and in some cases are completely inert, as in the case of charred or burned debris. ESI opted to use an L<sub>0</sub> value of 80 m<sup>3</sup>/Mg rather than the conventional value of 100 m<sup>3</sup>/Mg, which would be typical of rural MSW landfills with limited recycling such as Coffin Butte, to account for these other waste streams.

In the bulk model, a k value of 0.04 year-1 was used. This value is typical of a landfill within the climate range that Coffin Butte is located. Additional models were ran using k values of 0.03 and 0.05, but the best fit curve, when compared to actual gas collection records, was generated at a k value of 0.04.

The requisite parts that composed the final bulk model were LandGEM projections of each individual waste stream, each with their own specific k and L<sub>0</sub> values incorporated. These values are shown below in Table 1.

Table 1: The percent volume, gas generation rate and gas generation potential listed for each waste type that has been or will be accepted at Coffin Butte Landfill.

	k	$L_0$	Waste Stream
Waste Type	(Units of year <sup>-1</sup> )	$(m^3/Mg)$	(% volume)
MSW	0.04	115	70.5
C&D	0.03	20	3
Organics	0.05	130	3
Special Wastes	0.03	20	8
Inert	0	0	15.5

# 5.2.3 Landfill Gas Generation

Because the header and lateral piping is expected to be in use longer than 15 years, pipe sizing, which is discussed in Section 5.4, is based on the maximum gas generation rate for the waste mass shown in the GCCS Master Plan in Appendix A.

According to the EPA's AP-42, a collection efficiency of 75% is a recommended default assumption although it can range from 50-95%. Because Coffin Butte Landfill makes use of a temporary cover for active waste areas and has not recorded methane surface emissions, a collection efficiency of 75% is assumed to be a conservative collection efficiency from which to base the capacity of the GCCS design. This collection

efficiency will be reevaluated over time as more flare data and more accurate well flow data becomes available.

Table 2 shows the projected LFG generated and LFG collected for 15 years from now, when the waste placed in the Master Plan is complete, and when the LandGEM projects gas generation will be at a maximum. In 2036 the projected LFG Collected at the enclosed flare assuming a 75% collection efficiency is 4366 scfm. This is well over the 3,000 scfm capacity of the current blower/flare skid, excluding the utilization of the PNGC LFGTE plant. The LFG collected at the skid is expected to reach over 3,000 scfm in 2022. If the actual collected LFG matches the LandGEM projections, the flare system will need to be resized before this point. Pipe sizing for the GCCS Master Plan is based on the predicted LFG collected in 2047, which is two years after final waste placement is complete and the model is projecting the maximum LFG generation of 6900 scfm of LFG and 5223 scfm at 75% collection efficiency.

Table 2: Projected LFG Generated and LFG Collected with 75% collection efficiency for 2022, 2036, and 2045.

	Projected LFG	Projected LFG
Year	Generated (cfm)	Collected (cfm)
2022	4381	3286
2036	6181	4366
2045	6900	5175

#### 5.3 RADIUS OF INFLUENCE AND WELL SPACING

The DEQ requires that "active collection wells, horizontal collectors, surface collectors, or other extraction devices" be spaced as necessary to achieve compliance with OAR 340-239-0110(2). The sufficient density to achieve this point of compliance is met by the well spacing as shown on the GCCS Master Plan (Appendix A), which is based on the calculated radius of influence (ROI) for each well. The goal in the ROI calculation was to maximize the radius while preventing air intrusion and to determine the vacuum necessary to reach the maximum radius.

The calculation of ROI for each well is shown in Appendix D and is dependent on several factors including length of solid well piping, waste permeability to LFG both vertically and horizontally, waste density, methane generation rate per unit mass, well vacuum, and the slope on which a well is placed. For the purpose of this design, the radius of influence was calculated assuming higher waste density and typical waste horizontal permeability which are shown in Table 3. A higher waste density was chosen due to known historical operational standards and waste composition data provided by Republic For compacted waste, the ratio of horizontal to vertical permeability to LFG can range anywhere from 2:1 to 10:1. For this design, a permeability ratio of 6:1 was used because it is a standard value and because the landfill cover used at the Landfill should make the ratio even higher.

Table 3: Values that were used in calculating the radius of influence for wells at Coffin Butte Landfill.

Variable	Value
Permeability	5·10 <sup>-4</sup> cm/sec
Waste Density	2,000 lb/yd³
Gas Generation	0.1

For the purpose of calculating radius of influence, wells at Coffin Butte Landfill were split into three different categories: wells on a 3:1 slope, wells on a 4:1 slope, wells on a 10:1 slope, and wells on a 1:0 slope (Waste Plateaus). Table 4 lists the ROI for each category of wells, and the ROI calculations for each individual well are also shown in Appendix D.

Table 4: ROI for each vertical well category along with solid pipe length and well vacuum needed.

Well Slope (run:rise)	Radius of Influence (ft)	Solid Pipe Length (ft)	Well Vacuum (in H20)
3:1	72.0	30	1.83
4:1	84.9	30	2.65
10:1	111.4	30	4.88
1:0	120.0	30	5.76

# 5.4 LFG PIPE SIZING

The final GCCS headers and laterals will need to be sized for a total potential system LFG flow of 6900 SCFM. This LFG flow rate is based on the total projected gas generation simulated from the LandGEM (Shown in Appendix B). The Master Plan Drawings (shown in Appendix A) have the GCCS headers and laterals sized so that the pressure drop between the blowers and the LFG wellheads is less than 20" W.C. for the maximum projected flow rate. This is to ensure that sufficient vacuum is available to all wells. Additionally, header and lateral pipes are sized for a pressure drop less than 1" W.C. per 100 ft of pipe per Republic Standards section 3.7.7.

The final design will have an 18" diameter perimeter header with exception of the southern portion of pipe that will be 24" diameter pipe. The perimeter header will be installed outside of waste when possible. The 24" diameter header pipe will allow for a lower pressure drop to the wells in Cell 6. Sumps are installed along the parameter header at low points.

Currently, an 18" diameter perimeter header has been installed along the South and East side of Cells 4 and 5. Header piping over waste is designed to traverse along the haul roads whenever feasible. Installing the header along the haul road allows for ease of installation, repair, and system troubleshooting.

An 18" diameter crossover header is recommended to be installed to allow for multiple pathways to the wells on the North side of the landfill. This crossover header also allows a direct route for the gas coming from the top of the wellfield prior to completion of the landfill. The crossover over will be installed as the haul road extends each year until the landfill reaches final grades. See Appendix C for more information regarding pressure loss and header sizing.

The Darcy-Weisbach equation listed below is used to calculate the pressure loss through pipe segments. Drawing M2.04 shows the pipe length, the pipe size, the flow rates and the calculated pressure drops per section of pipe.

$$\Delta p = f_D \frac{L * \rho * V^2}{2 * D}$$

 $\Delta p$  – Pressure Loss

 $f_D - Darcy\ (Moody) Friction\ Factor$ 

 $L-Length\ of\ Pipe$ 

 $\rho$  – Density of Landfill Gas

 $V-Velocity\ of\ Landfill\ Gas$ 

D-Inside Diameter of Pipe

# Assumptions:

- Landfill gas consists of 50% Methane by volume and 50% Carbon Dioxide by volume.
- The gas is 100% saturated with water vapor
- The gas is at 100 degrees Fahrenheit
- The vacuum at the blowers is 50 inches of water column.
- Small radius of influence wells generate 30 SCFM of LFG.
- Lange radius of influence wells generate 55 SCFM of LFG.
- Header piping in waste is assumed to be HDPE SDR 17 and outside of waste is assumed to be HDPE SDR 26 in accordance with Republic's SOP on Landfill Gas Design section 3.7.7.
- Header segment calculations use the longer distances or piping from points, even is shorter routes exist, this it to ensure piping is oversized, rather than undersized.
- These calculations assume all header isolation valves are open in order to accommodate proper liquid drainage.

See Appendix C for more information regarding pressure loss and header sizing.

#### 5.5 COMPRESSOR SIZING

The compressor described in Section 4.5.1 will accommodate the air flow requirements of 160 QED AP4+ pneumatic pumps cycling simultaneously. This quantity of pumps was determined by taking the number of projected vertical wells installed in 2036 and multiplying by 70% which correlates with the current number of vertical wells that house leachate extraction pumps. This is a worst-case model of air requirements near the end of the estimated life of the air compressor equipment. The air compressor is adequately sized to serve every pump when the landfill has reached the extent of the current GCCS Master Plan; however, this is past the expected 15 year life of the compressor. A new air compressor will be selected and sized accordingly when the current compressor reaches the end of its operational life.

The air usage for each pump was determined from the pump specification sheet provided by QED and shown in Appendix E. The air consumption for one pump at an average well depth of 120ft is 1.1 SCF/gal. Based upon typical usage (pumps cycling at 40% capacity), we find that the gallons per minute used would be 5 gpm. These two values multiplied together give us the required air flow rate per pump and can be directly compared to compressor sizes for system sizing. A 120ft well depth on average was used because the air flow requirements at that depth are at a peak for our expected well depth range. These calculations can be viewed in Appendix E.



### **6** OPERATIONS

OAR 340-239-0110(2) outlines operational standards for collection and control systems. CBLF currently complies with their Title V Permit and the NSPS. In meeting these requirements, CBLF has submitted a Startup, Shutdown, and Malfunction Plan; and a Surface Emission Monitoring Plan. CBLF also operates the GCCS in a manner that complies with requirements and has provided all reports required by their permit.

The following sections will address new operational standards required by OAR 340-239-0110(2).

### **6.1 Surface Emission Monitoring**

The Coffin Butte Landfill currently conducts, at a minimum, quarterly surface emissions monitoring in accordance with NSPS requirements. The landfill will continue to conduct surface monitoring in accordance with DEQ requirements in OAR 340-239-0600)(1). If the GCCS at the Coffin Butte Landfill does not meet the measures of performance set forth in OAR 340-239-0200, the GCCS will be adjusted or modified in accordance with the DEQ to meet these requirements. These adjustments or modifications may include the installation of additional collection elements, cap and cover repairs, or other actions defined by field conditions at the time of monitoring.

All GCCS components containing LFG or under positive pressure will be monitored at minimum, quarterly for leaks. Any component leak exceeding 500 ppmv methane will be tagged and repaired within 10 days of discovery. Any component leak exceeding 250 ppmv will be recorded pursuant to OAR 340-239-0700(2)(a)(S). Quarterly testing at CBLF may be conducted prior to scheduled maintenance and planned outage time periods of PNGC's LFGTE facility.

### **6.2 Emission Mitigation Measures**

**OAR 340-239-0110 (1)(c)(E)** The Design Plan must include a description of potential mitigation measures to be used to prevent the release of methane or other pollutants into the atmosphere during the installation or preparation of wells, piping, or other equipment; during repairs or the temporary shutdown of gas collection system components; or, when solid waste is to be excavated and moved.

### 6.2.1 Installation Mitigations

In order to mitigate the release of LFG into the atmosphere during installation and expansion of the GCCS, vertical LFG extraction wells will be set and securely capped or connected to existing vacuum source within the GCCS infrastructure, immediately following drilling. Boreholes will then be backfilled as indicated in the design plans in Appendix A. Under no circumstances will a borehole be left open to atmosphere for times exceeding those needed for proper well setting and installation during construction.

Horizontal collectors will be installed and backfilled as indicated in the design plans in Appendix A immediately following trenching. If a collector is not able to be installed immediately, the trench will be backfilled in order to mitigate LFG release into the atmosphere. Installed collectors will remain securely capped until connected to existing GCCS infrastructure.

## 6.2.2 Operational Mitigations

During repairs or temporary shutdown of GCCS components, the system will be isolated, if possible, to not cause a complete shutdown of the system while repairs or expansions are being made. Repairs requiring the complete shutdown of the GCCS will be carried out in an expedited manner in which minimizes downtime or allows for partial operation of the GCCS via isolation if possible.

When solid waste is to be moved or excavated, approved fill and cover material will be placed upon the area immediately following the end of the operations. Ongoing excavations will be covered with daily cover as to mitigate LFG emissions into the atmosphere while active operations are not occurring.

In the event of any temporary shutdown due to an emergency, catastrophic event, or landfill fire, DEQ will be notified in accordance with OAR 340-239-0700(3)(n).

### **6.3 ASBESTOS AND NON-PRODUCTIVE WASTE**

Outside of the designated asbestos areas, no areas of the landfill were determined to be non-productive; therefore, no areas of the landfill have been excluded from the coverage of the GCCS. As per OAR 340-239-0110(2)(a)(H), a non-productive area may be excluded from control if the total excluded area can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. If an area(s) is determined to be non-productive at a future date, an application to exclude these areas from the operations of the GCCS will be submitted and all calculations, data, and documentation will be submitted to DEQ. Methane emissions from areas in question will be calculated with a method in accordance with OAR 340-239-0800(5).

All future active areas with active and passive collection systems will be installed with liners on the bottoms and all sides in which gas is to be collected. The liner will be installed as required by 40 C.F.R § 258.40 design criteria.

### **6.4 ALTERNATIVE COMPLIANCE OPTIONS**

Per NSPS 40 CFR §60.752(b)(2)(i)(B), the previous GCCS design plan included any alternatives to "the operational standards, test methods, procedures, compliance measures, monitoring, record keeping or reporting provisions of §60.753 through §60.753 proposed by the owner or operator." The current approved AOMP for Coffin Butte Landfill is shown in Appendix G. The purpose of this AOMP is to ensure the wellfield can be reasonably operated to maintain compliance and prevent fugitive emissions.

The current AOMP will be reviewed and resubmitted to DEQ for approval in pursuant to OAR 340-239-0110(1)(c)(D).

#### 6.5 WELLHEAD SAMPLING

Each wellhead will have a sampling port and measuring devices to comply with the following, pursuant of OAR 340-239-0110(3):

- Sample port in which nitrogen and oxygen concentrations in the landfill gas may be monitored on a monthly basis as provided in OAR 340-239-0600(3).
- Sampling port in which landfill gas temperature may be monitored on a monthly basis as provided in OAR 340-239-0600(3).
- Sampling port in which gauge pressure in the gas collection header may be measured on a monthly basis as provided in OAR 340-239-0600(2)(d).

### 6.6 WELL RAISING

Continuous operation of the GCCS as detailed in requirements OAR 340-239-0110(2)(a)(A) and OAR 340-239-0110(2)(a)(B) do not apply to wells that are being raised, provided they are being raised due to new fill being added or compacted within the immediate vicinity around the well and that once installed the gas collection extension is sealed and capped until the well is reconnected to a vacuum source.

Wells being raised due to new waste deposition will be sealed and capped in a manner pursuant to these requirements and will be reconnected to a vacuum source as soon as filling operations cease within the immediate vicinity of the raised well.

### **6.7 GCCS OPERATION**

The components and design considerations within this GCCS design plan allow for CBLF to operate the GCCS in accordance with all monitoring and operational practices detailed in OAR 340-239-0600. Currently the GCCS is monitored twice each month. A monthly SOP review is provided by the design engineer along with a report to address exceedances, operational concerns, and other compliance issues so that points of noncompliance with any section of OAR 340-239-0600 may be addressed in an expedient manner.



# GCCS MASTER PLAN 2016

# **COFFIN BUTTE LANDFILL**

CORVALLIS, OREGON

## PROJECT INFORMATION

#### PROJECT LOCATION

28972 COFFIN BUTTE ROAD CORVALLIS, OREGON 97330

#### PROJECT DESCRIPTION

LANDFILL GAS COLLECTION AND CONTROL SYSTEM (GCCS) MASTER PLAN TO SERVE AS A GENERAL GUIDE FOR FUTURE 5 YEAR PLANNING AND ANNUAL GCCS EXPANSIONS.

### LANDFILL OWNER

REPUBLIC SERVICES 28972 COFFIN BUTTE ROAD CORVALLIS, OREGON 97330 (541) 745-5792

#### GCCS ENGINEER

ENERGYNEERING SOLUTIONS, INC. 15820 BARCLAY DRIVE, SISTERS, OR 97759 (541) 549-8766

#### DRAWING INDEX

# 1. GAS COLLECTION

M0.01	COVER PAGE
M1.00	CELL BOUNDARY MAP
M1.01	EXISTING LFG INFRASTRUCTURE I
M1.02	EXISTING LFG INFRASTRUCTURE II
M2.01	FINAL PIPING PLAN
M2.02	FINAL FACILITY CONNECTION
M2.03	FINAL VERTICAL WELL PLAN
M2.04	CALCULATIONS

VERTICAL WELL DETAILS I VERTICAL WELL DETAILS II VERTICAL WELL DETAILS III HORIZONTAL WELL DETAILS SUMP DETAILS TRENCH AND CROSSING DETAILS STUB-UP DETAILS MISC. DETAILS M3.01 M3.02 M3.03 M3.04 M3.05 M3.06 M3.07 M3.08


0	06/30/16	GCCS MASTER PLAN	PD	DC	JM
REV	DATE	DESCRIPTION	DRN BY	DSN BY	CHK BY








COVER PAGE	
MASTER PLAN COFFIN BUTTE LANDFILL	


DRAWING NO. M0.01

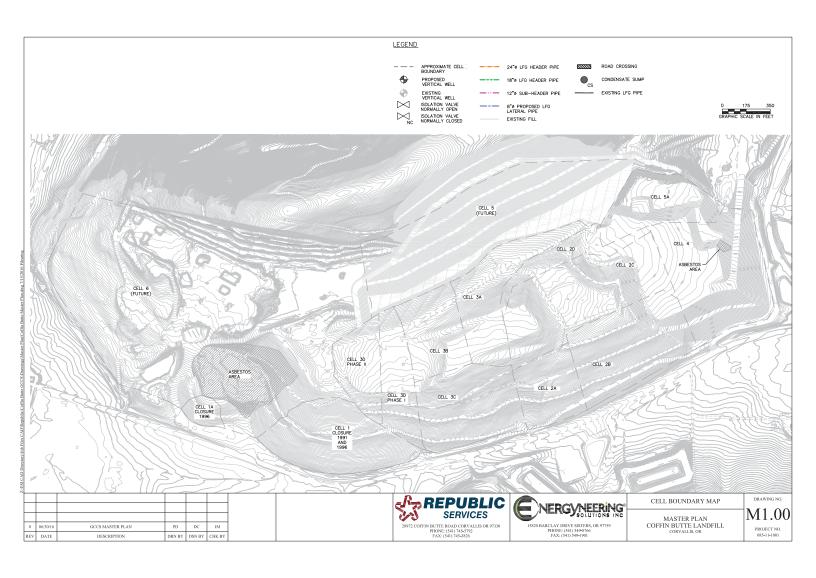


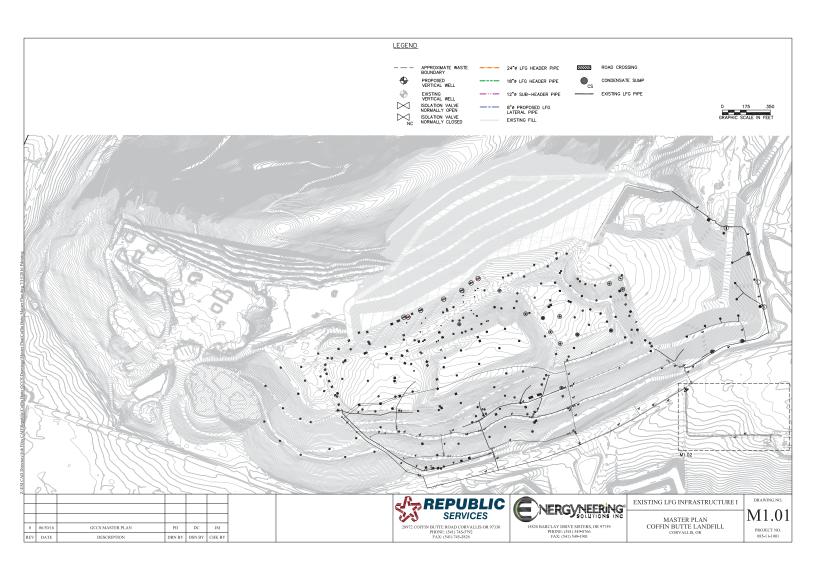


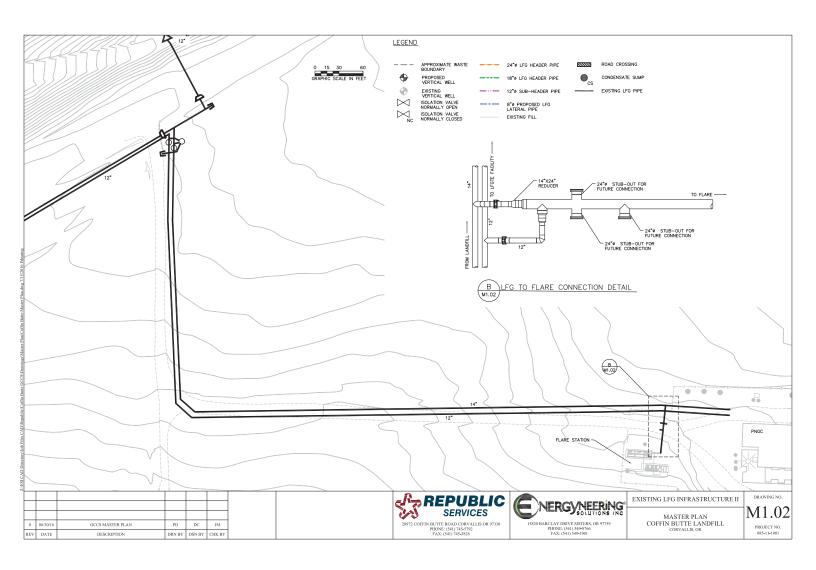


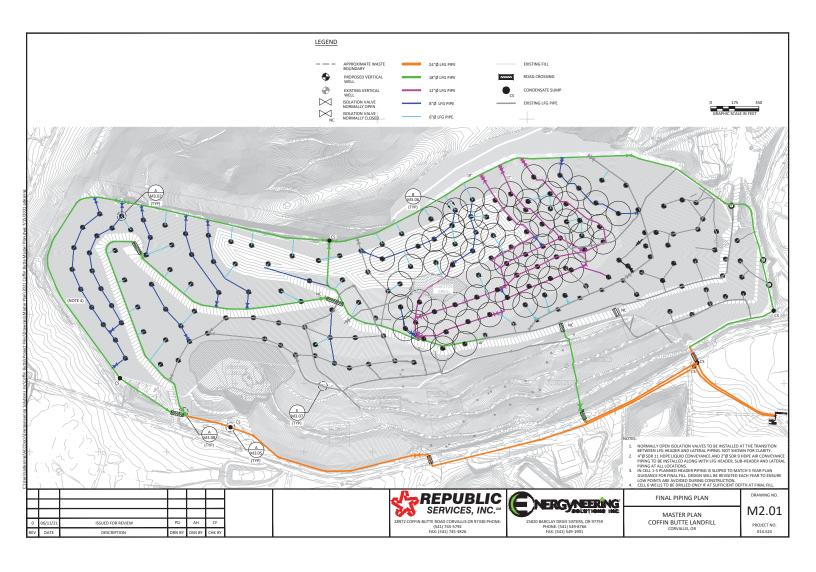


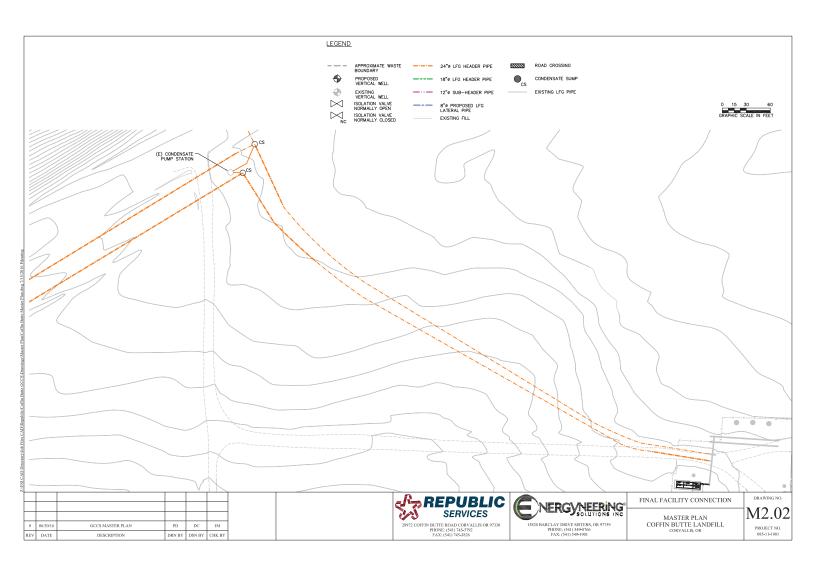


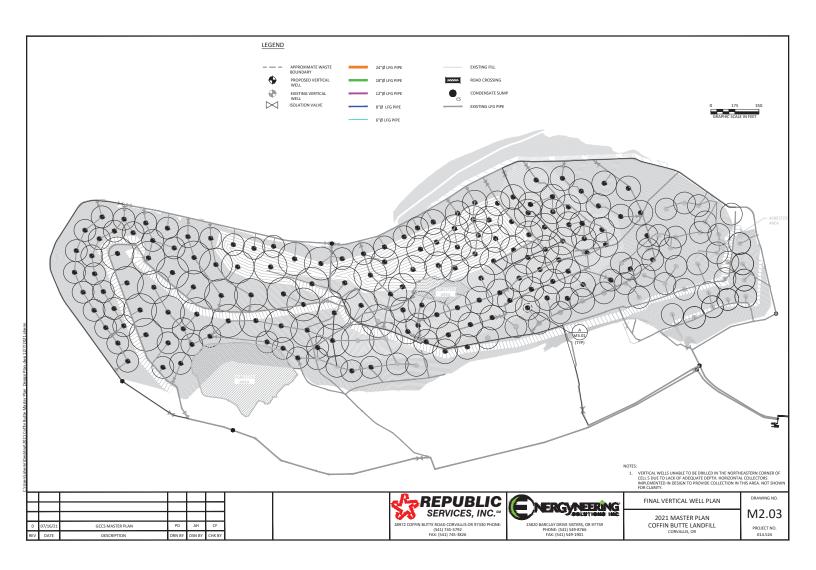


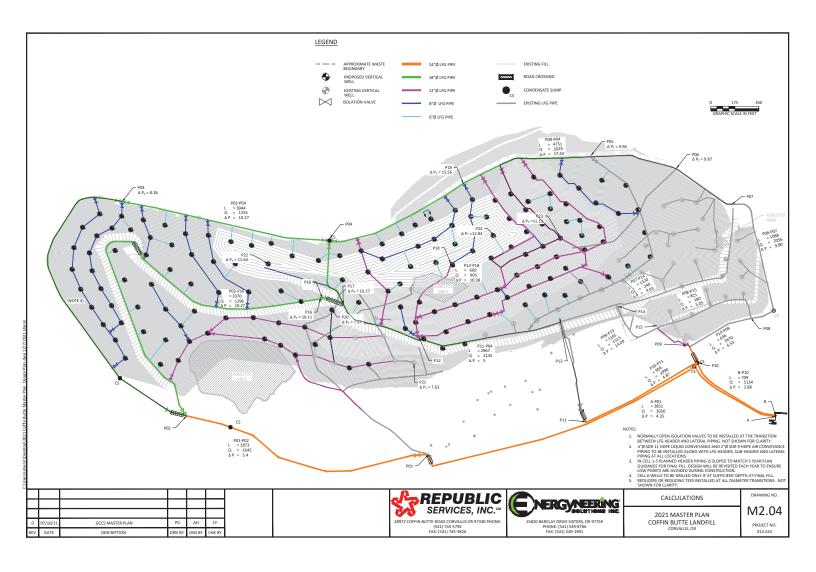


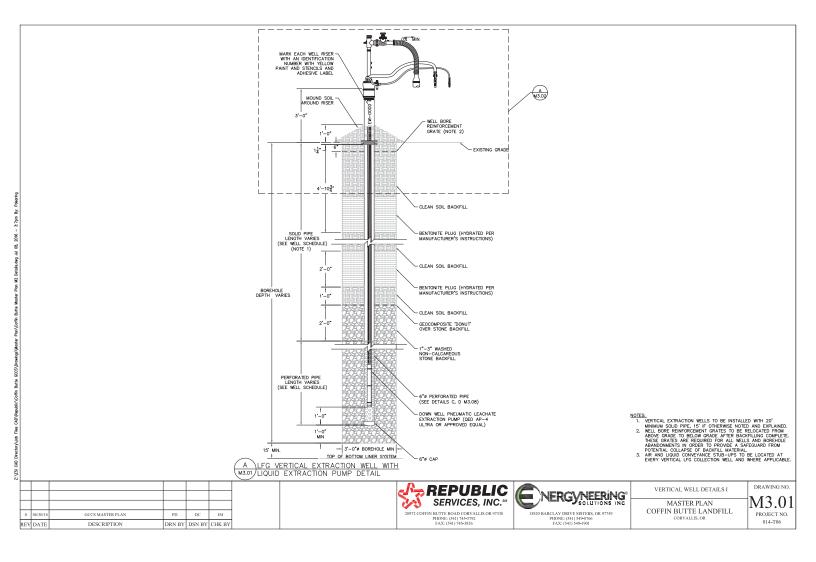


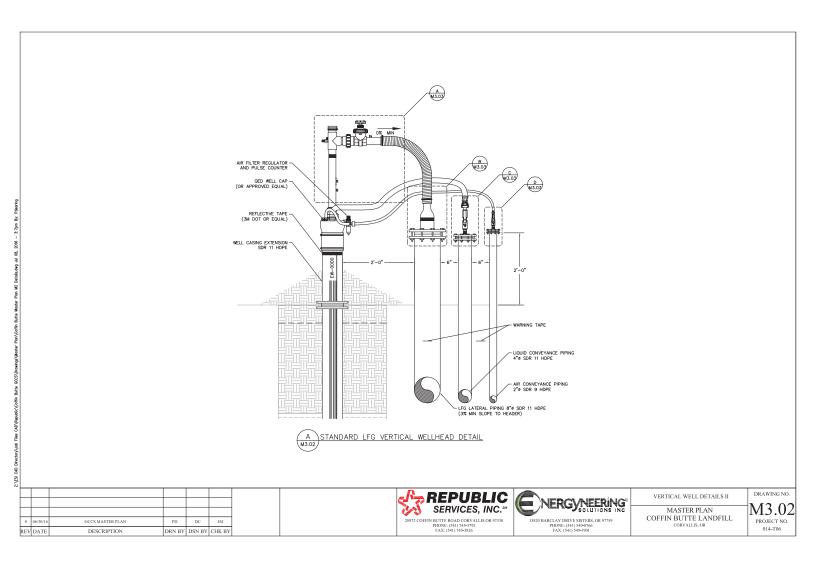


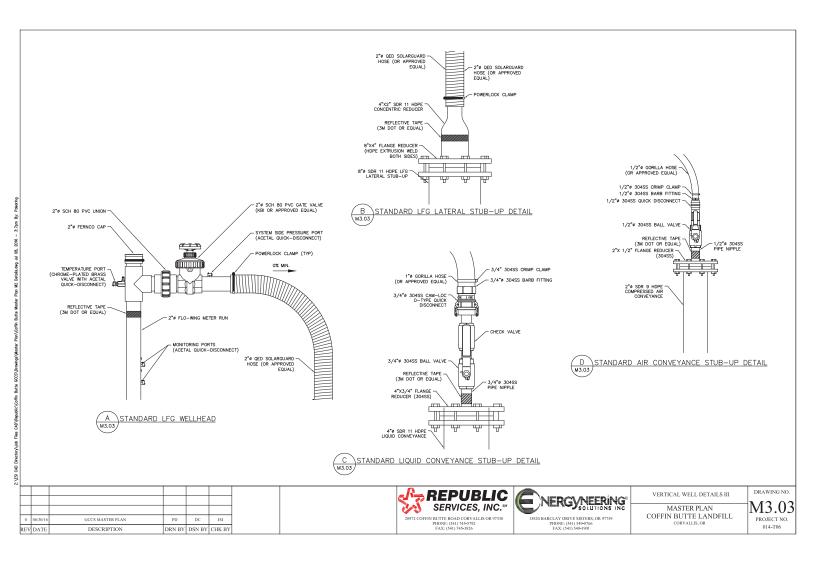


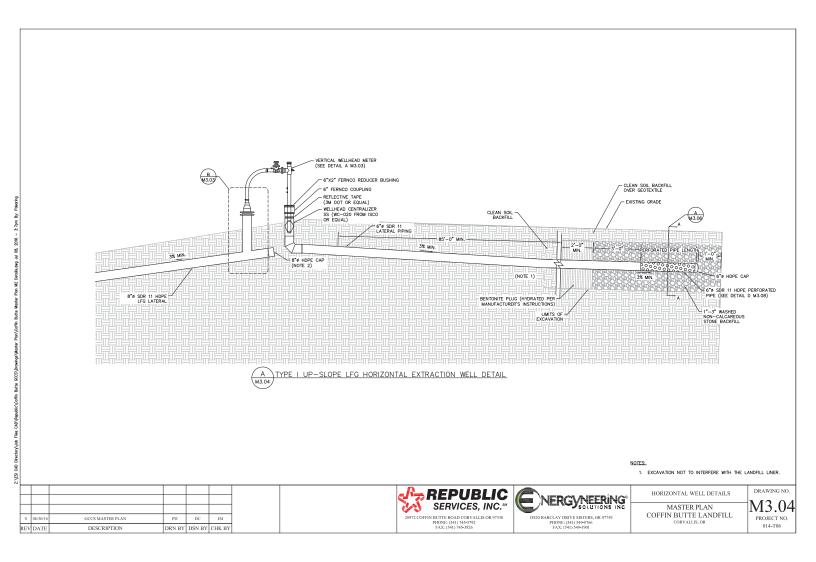

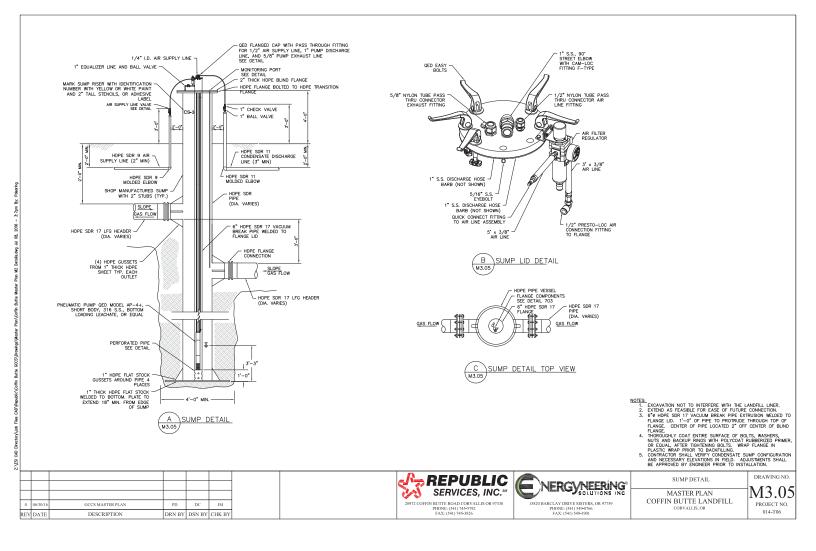

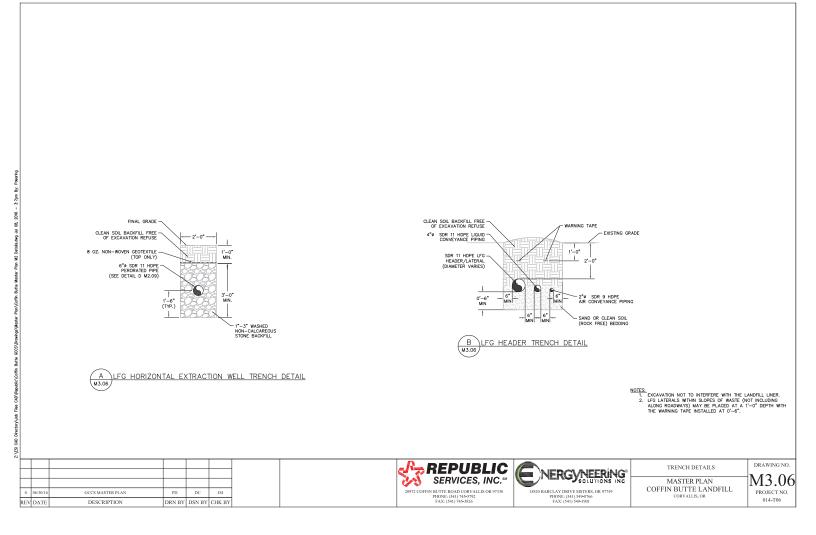

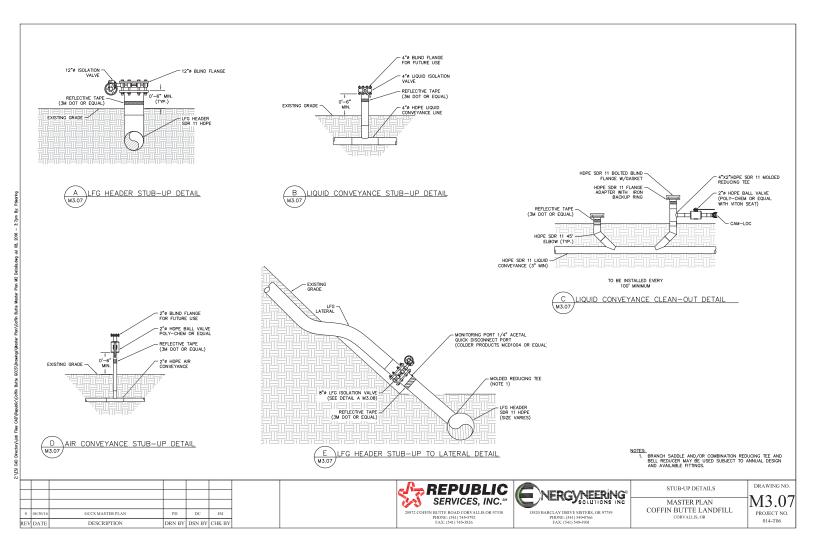

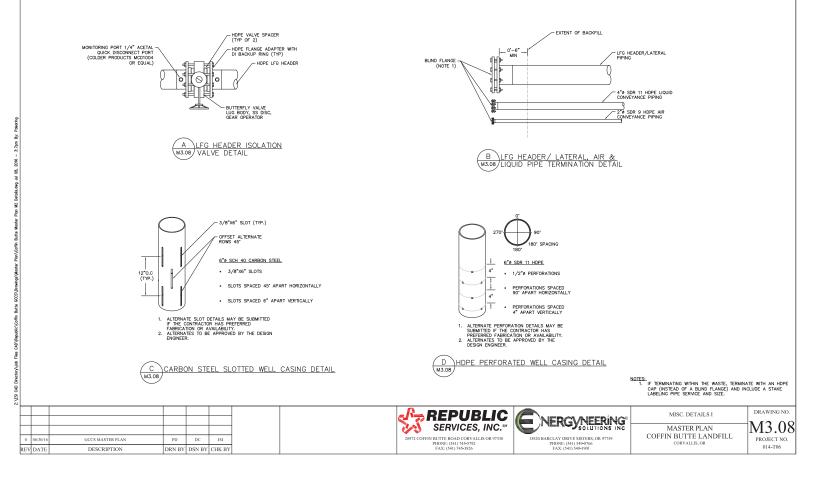





# **Summary Report**

Landfill Name or Identifier: Special Waste CB Landfill

Date: Monday, May 10, 2021

**Description/Comments:** 

#### **About LandGEM:**

First-Order Decomposition Rate Equation:

 $Q_{CH_4} = \sum_{i=1}^{n} \sum_{j=0,1}^{1} k L_o \left(\frac{M_i}{10}\right) e^{-kt_{ij}}$ 

Where

 $Q_{CH4}$  = annual methane generation in the year of the calculation ( $m^3/year$ )

i = 1-year time increment

n = (year of the calculation) - (initial year of waste acceptance)

j = 0.1-year time increment

 $k = methane generation rate (year^{-1})$ 

 $L_o$  = potential methane generation capacity  $(m^3/Mg)$ 

 $M_i$  = mass of waste accepted in the  $i^{th}$  year (Mg)  $t_{ij}$  = age of the  $j^{th}$  section of waste mass  $M_i$  accepted in the  $i^{th}$  year ( $decimal\ years$ , e.g., 3.2 years)

LandGEM is based on a first-order decomposition rate equation for quantifying emissions from the decomposition of landfilled waste in municipal solid waste (MSW) landfills. The software provides a relatively simple approach to estimating landfill gas emissions. Model defaults are based on empirical data from U.S. landfills. Field test data can also be used in place of model defaults when available. Further guidance on EPA test methods, Clean Air Act (CAA) regulations, and other guidance regarding landfill gas emissions and control technology requirements can be found at http://www.epa.gov/ttnatw01/landfill/landfilpg.html.

LandGEM is considered a screening tool — the better the input data, the better the estimates. Often, there are limitations with the available data regarding waste quantity and composition, variation in design and operating practices over time, and changes occurring over time that impact the emissions potential. Changes to landfill operation, such as operating under wet conditions through leachate recirculation or other liquid additions, will result in generating more gas at a faster rate. Defaults for estimating emissions for this type of operation are being developed to include in LandGEM along with defaults for convential landfills (no leachate or liquid additions) for developing emission inventories and determining CAA applicability. Refer to the Web site identified above for future updates.

# **Input Review**

LANDFILL CHARACTERISTICS

Landfill Open Year1978Landfill Closure Year (with 80-year limit)2045Actual Closure Year (without limit)2045Have Model Calculate Closure Year?No

Waste Design Capacity megagrams

MODEL PARAMETERS

Methane Generation Rate, k  ${\bf 0.030}$   ${\it year}^{-1}$  Potential Methane Generation Capacity, L $_{\rm o}$   ${\bf 20}$   ${\it m}^3/{\it Mg}$ 

NMOC Concentration600ppmv as hexaneMethane Content50% by volume

GASES / POLLUTANTS SELECTED

Gas / Pollutant #1: Total landfill gas
Gas / Pollutant #2: Methane
Gas / Pollutant #3: Carbon dioxide
Gas / Pollutant #4: NMOC

# WASTE ACCEPTANCE RATES

	Waste Ac		Waste-In-Place		
Year	(Mg/year)	(short tons/year)	(Mg)	(short tons)	
1978	0	0	0	0	
1979	0	0	0	0	
1980	0	0	0	0	
1981	0	0	0	0	
1982	0	0	0	0	
1983	0	0	0	0	
1984	0	0	0	0	
1985	0	0	0	0	
1986	0	0	0	0	
1987	0	0	0	0	
1988	0	0	0	0	
1989	0	0	0	0	
1990	0	0	0	0	
1991	0	0	0	0	
1992	0	0	0	0	
1993	0	0	0	0	
1994	0	0	0	0	
1995	0	0	0	0	
1996	0	0	0	0	
1997	40,984	45,082	0	0	
1998	34,970	38,467	40,984	45,082	
1999	33,476	36,824	75,954	83,549	
2000	36,351	39,986	109,430	120,373	
2001	38,282	42,110	145,781	160,359	
2002	69,163	76,079	184,063	202,469	
2003	197,915	217,707	253,225	278,548	
2004	87,785	96,563	451,141	496,255	
2005	75,921	83,514	538,925	592,818	
2006	93,495	102,845	614,847	676,331	
2007	81,486	89,634	708,342	779,176	
2008	101,682	111,851	789,828	868,811	
2009	137,438	151,182	891,511	980,662	
2010	94,090	103,499	1,028,949	1,131,844	
2011	68,905	75,796	1,123,039	1,235,342	
2012	51,975	57,172	1,191,944	1,311,138	
2013	63,013	69,314	1,243,919	1,368,311	
2014	88,426	97,269	1,306,931	1,437,624	
2015	103,883	114,272	1,395,358	1,534,893	
2016	66,203	72,824	1,499,241	1,649,165	
2017	86,699	95,369	1,565,444	1,721,989	

WASTE ACCEPTANCE RATES (Continued)

	E ACCEPTANCE RATES  Waste Ac	,	Waste-In-Place			
Year	(Mg/year)	(short tons/year)	(Mg)	(short tons)		
2018	123,351	135,686	1,652,144	1,817,358		
2019	97,989	107,788	1,775,495	1,953,044		
2020	61,484	67,632	1,873,484	2,060,832		
2020	58,182	64,000	1,934,968	2,128,465		
2021	58,182	64,000	1,993,150	2,126,465		
2022	·		2,051,332	2,192,465		
	58,182	64,000		, ,		
2024	58,182	64,000	2,109,513	2,320,465		
2025	58,182	64,000	2,167,695	2,384,465		
2026	58,182	64,000	2,225,877	2,448,465		
2027	58,182	64,000	2,284,059	2,512,465		
2028	58,182	64,000	2,342,241	2,576,465		
2029	58,182	64,000	2,400,422	2,640,465		
2030	58,182	64,000	2,458,604	2,704,465		
2031	58,182	64,000	2,516,786	2,768,465		
2032	58,182	64,000	2,574,968	2,832,465		
2033	58,182	64,000	2,633,150	2,896,465		
2034	58,182	64,000	2,691,332	2,960,465		
2035	58,182	64,000	2,749,513	3,024,465		
2036	58,182	64,000	2,807,695	3,088,465		
2037	58,182	64,000	2,865,877	3,152,465		
2038	58,182	64,000	2,924,059	3,216,465		
2039	58,182	64,000	2,982,241	3,280,465		
2040	58,182	64,000	3,040,422	3,344,465		
2041	58,182	64,000	3,098,604	3,408,465		
2042	58,182	64,000	3,156,786	3,472,465		
2043	58,182	64,000	3,214,968	3,536,465		
2044	58,182	64,000	3,273,150	3,600,465		
2045	58,182	64,000	3,331,332	3,664,465		
2046	0	0	3,389,513	3,728,465		
2047	0	0	3,389,513	3,728,465		
2048	0	0	3,389,513	3,728,465		
2049	0	0	3,389,513	3,728,465		
2050	0	0	3,389,513	3,728,465		
2051	0	0	3,389,513	3,728,465		
2052	0	0	3,389,513	3,728,465		
2053	0	0	3,389,513	3,728,465		
2054	0	0	3,389,513	3,728,465		
2055	0	0	3,389,513	3,728,465		
2056	0	0	3,389,513	3,728,465		
2057	0	0	3,389,513	3,728,465		

# **Pollutant Parameters**

Dichloromethane (methylene chloride) -HAP

Ethane

Ethanol - VOC

Dimethyl sulfide (methyl sulfide) - VOC

14

7.8

890

27

	Gas / Poll	lutant Default Paran	neters:		llutant Parameters:
		Concentration		Concentration	
	Compound	(ppmv)	Molecular Weight	(ppmv)	Molecular Weight
Gases	Total landfill gas		0.00		
ase	Methane Carbon dioxide		16.04 44.01		
Ö	NMOC	4,000	86.18		
	1,1,1-Trichloroethane	4,000	00.10		
	(methyl chloroform) -				
	HAP	0.48	133.41		
	1,1,2,2-				
	Tetrachloroethane -				
	HAP/VOC	1.1	167.85		
	1,1-Dichloroethane				
	(ethylidene dichloride) -				
	HAP/VOC	2.4	98.97		
	1,1-Dichloroethene				
	(vinylidene chloride) -	0.00	00.04		
	HAP/VOC 1,2-Dichloroethane	0.20	96.94		
	(ethylene dichloride) -				
	HAP/VOC	0.41	98.96		
	1,2-Dichloropropane	0.41	30.30		
	(propylene dichloride) -				
	HAP/VOC	0.18	112.99		
	2-Propanol (isopropyl				
	alcohol) - VOC	50	60.11		
	Acetone	7.0	58.08		
	Acrylonitrile - HAP/VOC	0.0	50.00		
	Benzene - No or	6.3	53.06		
	Unknown Co-disposal -				
	HAP/VOC	1.9	78.11		
	Benzene - Co-disposal -	1.0	70.11		
	HAP/VOC	11	78.11		
Pollutants	Bromodichloromethane -				
nta	voc	3.1	163.83		
ē	Butane - VOC	5.0	58.12		
<u> </u>	Carbon disulfide -				
	HAP/VOC	0.58	76.13		
	Carbon monoxide	140	28.01		
	Carbon tetrachloride -				
	HAP/VOC	4.0E-03	153.84		
	Carbonyl sulfide -	0.40	60.07		
	HAP/VOC Chlorobenzene -	0.49	60.07		
	HAP/VOC	0.25	112.56		
	Chlorodifluoromethane	1.3	86.47		
	Chloroethane (ethyl	1.0	00.11		1
	chloride) - HAP/VOC	1.3	64.52		
	Chloroform - HAP/VOC	0.03	119.39		
	Chloromethane - VOC	1.2	50.49		
	Dichlorobenzene - (HAP				
	for para isomer/VOC)				
	.s. para isomor/ vooj	0.21	147		1
	Dichlorodifluoromethane	40	100.01		
		16	120.91		1
	Dichlorofluoromethane -	2.0	100.00		
	VOC	2.6	102.92		1

84.94

62.13

30.07


46.08


# **Pollutant Parameters (Continued)**


Gas / Pol	llutant Default Param	eters:	User-specified Pol	lutant Parameters:

	Gas / Pol	User-specified Pollutant Parameters:			
	Compound	Concentration (ppmv)	Molecular Weight	Concentration (ppmv)	Molecular Weight
	Ethyl mercaptan (ethanethiol) - VOC	2.3	62.13	, , , , , , , , , , , , , , , , , , ,	J
	Ethylbenzene -				
	HAP/VOC Ethylene dibromide -	4.6	106.16		
	HAP/VOC	1.0E-03	187.88		
	Fluorotrichloromethane - VOC	0.76	137.38		
	Hexane - HAP/VOC	6.6	86.18		
	Hydrogen sulfide Mercury (total) - HAP	36	34.08		
	Methyl ethyl ketone -	2.9E-04	200.61		
	HAP/VOC	7.1	72.11		
	Methyl isobutyl ketone - HAP/VOC	1.9	100.16		
	Methyl mercaptan - VOC	2.5	48.11		
	Pentane - VOC	3.3	72.15		
	Perchloroethylene				
	(tetrachloroethylene) - HAP	3.7	165.00		
	Propane - VOC	3.7 11	165.83 44.09		
	t-1,2-Dichloroethene -				
	VOC Toluene - No or	2.8	96.94		
	Unknown Co-disposal -				
	HAP/VOC	39	92.13		
	Toluene - Co-disposal - HAP/VOC	170	92.13		
nts	Trichloroethylene (trichloroethene) - HAP/VOC	2.8	131.40		
Pollutants	Vinyl chloride - HAP/VOC Xylenes - HAP/VOC	7.3 12	62.50 106.16		

# **Graphs**

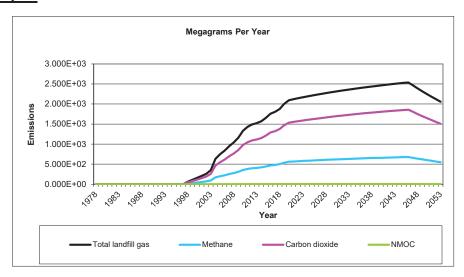

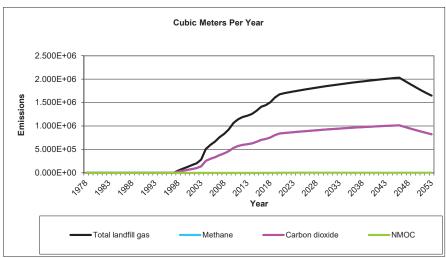

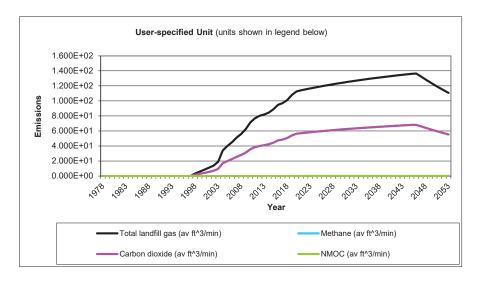

# Results

Vaar	Total landfill gas			Methane			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
1978	0	0	0	0	0	0	
1979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1998	6.060E+01	4.852E+04	3.260E+00	1.619E+01	2.426E+04	1.630E+00	
1999	1.105E+02	8.849E+04	5.946E+00	2.952E+01	4.425E+04	2.973E+00	
2000	1.567E+02	1.255E+05	8.433E+00	4.187E+01	6.276E+04	4.217E+00	
2001	2.059E+02	1.648E+05	1.108E+01	5.499E+01	8.242E+04	5.538E+00	
2002	2.564E+02	2.053E+05	1.379E+01	6.848E+01	1.026E+05	6.897E+00	
2003	3.511E+02	2.811E+05	1.889E+01	9.377E+01	1.406E+05	9.444E+00	
2004	6.333E+02	5.071E+05	3.407E+01	1.692E+02	2.536E+05	1.704E+01	
2005	7.444E+02	5.961E+05	4.005E+01	1.988E+02	2.980E+05	2.002E+01	
2006	8.346E+02	6.683E+05	4.491E+01	2.229E+02	3.342E+05	2.245E+01	
2007	9.482E+02	7.593E+05	5.102E+01	2.533E+02	3.796E+05	2.551E+01	
2008	1.041E+03	8.333E+05	5.599E+01	2.780E+02	4.167E+05	2.800E+01	
2009	1.160E+03	9.291E+05	6.242E+01	3.099E+02	4.645E+05	3.121E+01	
2010	1.329E+03	1.064E+06	7.151E+01	3.550E+02	5.322E+05	3.576E+01	
2011	1.429E+03	1.144E+06	7.688E+01	3.817E+02	5.721E+05	3.844E+01	
2012	1.489E+03	1.192E+06	8.009E+01	3.976E+02	5.960E+05	4.005E+01	
2013	1.522E+03	1.218E+06	8.186E+01	4.064E+02	6.092E+05	4.093E+01	
2014	1.570E+03	1.257E+06	8.445E+01	4.193E+02	6.285E+05	4.223E+01	
2015	1.654E+03	1.324E+06	8.899E+01	4.418E+02	6.622E+05	4.450E+01	
2016	1.759E+03	1.408E+06	9.463E+01	4.698E+02	7.042E+05	4.731E+01	
2017	1.805E+03	1.445E+06	9.710E+01	4.820E+02	7.225E+05	4.855E+01	
2018	1.880E+03	1.505E+06	1.011E+02	5.020E+02	7.525E+05	5.056E+01	
2019	2.006E+03	1.607E+06	1.079E+02	5.359E+02	8.033E+05	5.397E+01	
2020	2.092E+03	1.675E+06	1.126E+02	5.588E+02	8.376E+05	5.628E+01	
2021	2.121E+03	1.698E+06	1.141E+02	5.665E+02	8.492E+05	5.706E+01	
2022	2.144E+03	1.717E+06	1.154E+02	5.728E+02	8.586E+05	5.769E+01	
2023	2.167E+03	1.735E+06	1.166E+02	5.788E+02	8.676E+05	5.830E+01	
2024	2.189E+03	1.753E+06	1.178E+02	5.847E+02	8.764E+05	5.889E+01	
2025	2.210E+03	1.770E+06	1.189E+02	5.904E+02	8.850E+05	5.946E+01	
2026	2.231E+03	1.786E+06	1.200E+02	5.959E+02	8.932E+05	6.002E+01	
2027	2.251E+03	1.803E+06	1.211E+02	6.013E+02	9.013E+05	6.056E+01	

V	Total landfill gas			Methane			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2028	2.271E+03	1.818E+06	1.222E+02	6.065E+02	9.091E+05	6.108E+01	
2029	2.290E+03	1.833E+06	1.232E+02	6.116E+02	9.167E+05	6.159E+01	
2030	2.308E+03	1.848E+06	1.242E+02	6.165E+02	9.240E+05	6.208E+01	
2031	2.326E+03	1.862E+06	1.251E+02	6.212E+02	9.312E+05	6.256E+01	
2032	2.343E+03	1.876E+06	1.261E+02	6.258E+02	9.381E+05	6.303E+01	
2033	2.360E+03	1.890E+06	1.270E+02	6.303E+02	9.448E+05	6.348E+01	
2034	2.376E+03	1.903E+06	1.278E+02	6.347E+02	9.513E+05	6.392E+01	
2035	2.392E+03	1.915E+06	1.287E+02	6.389E+02	9.576E+05	6.434E+01	
2036	2.407E+03	1.928E+06	1.295E+02	6.430E+02	9.638E+05	6.476E+01	
2037	2.422E+03	1.939E+06	1.303E+02	6.470E+02	9.697E+05	6.516E+01	
2038	2.437E+03	1.951E+06	1.311E+02	6.508E+02	9.755E+05	6.555E+01	
2039	2.451E+03	1.962E+06	1.318E+02	6.546E+02	9.811E+05	6.592E+01	
2040	2.464E+03	1.973E+06	1.326E+02	6.582E+02	9.866E+05	6.629E+01	
2041	2.477E+03	1.984E+06	1.333E+02	6.617E+02	9.919E+05	6.664E+01	
2042	2.490E+03	1.994E+06	1.340E+02	6.651E+02	9.970E+05	6.699E+01	
2043	2.503E+03	2.004E+06	1.346E+02	6.685E+02	1.002E+06	6.732E+01	
2044	2.515E+03	2.014E+06	1.353E+02	6.717E+02	1.007E+06	6.765E+01	
2045	2.526E+03	2.023E+06	1.359E+02	6.748E+02	1.011E+06	6.796E+01	
2046	2.538E+03	2.032E+06	1.365E+02	6.778E+02	1.016E+06	6.827E+01	
2047	2.463E+03	1.972E+06	1.325E+02	6.578E+02	9.860E+05	6.625E+01	
2048	2.390E+03	1.914E+06	1.286E+02	6.384E+02	9.569E+05	6.429E+01	
2049	2.319E+03	1.857E+06	1.248E+02	6.195E+02	9.286E+05	6.239E+01	
2050	2.251E+03	1.802E+06	1.211E+02	6.012E+02	9.011E+05	6.055E+01	
2051	2.184E+03	1.749E+06	1.175E+02	5.834E+02	8.745E+05	5.876E+01	
2052	2.120E+03	1.697E+06	1.140E+02	5.662E+02	8.487E+05	5.702E+01	
2053	2.057E+03	1.647E+06	1.107E+02	5.494E+02	8.236E+05	5.534E+01	
2054	1.996E+03	1.598E+06	1.074E+02	5.332E+02	7.992E+05	5.370E+01	
2055	1.937E+03	1.551E+06	1.042E+02	5.175E+02	7.756E+05	5.211E+01	
2056	1.880E+03	1.505E+06	1.011E+02	5.022E+02	7.527E+05	5.057E+01	
2057	1.824E+03	1.461E+06	9.816E+01	4.873E+02	7.304E+05	4.908E+01	
2058	1.770E+03	1.418E+06	9.526E+01	4.729E+02	7.089E+05	4.763E+01	
2059	1.718E+03	1.376E+06	9.244E+01	4.589E+02	6.879E+05	4.622E+01	
2060	1.667E+03	1.335E+06	8.971E+01	4.454E+02	6.676E+05	4.485E+01	
2061	1.618E+03	1.296E+06	8.706E+01	4.322E+02	6.479E+05	4.353E+01	
2062	1.570E+03	1.257E+06	8.449E+01	4.194E+02	6.287E+05	4.224E+01	
2063	1.524E+03	1.220E+06	8.199E+01	4.070E+02	6.101E+05	4.099E+01	
2064	1.479E+03	1.184E+06	7.957E+01	3.950E+02	5.921E+05	3.978E+01	
2065	1.435E+03	1.149E+06	7.721E+01	3.833E+02	5.746E+05	3.861E+01	
2066	1.393E+03	1.115E+06	7.493E+01	3.720E+02	5.576E+05	3.747E+01	
2067	1.352E+03	1.082E+06	7.433E+01	3.610E+02	5.411E+05	3.636E+01	
2068	1.312E+03	1.050E+06	7.057E+01	3.503E+02	5.251E+05	3.528E+01	
2069	1.273E+03	1.030E+06	6.848E+01	3.400E+02	5.096E+05	3.424E+01	
2070	1.275E+03	9.891E+05	6.646E+01	3.400E+02 3.299E+02	4.946E+05	3.323E+01	
2070	1.199E+03	9.599E+05	6.449E+01	3.202E+02	4.799E+05	3.225E+01	
2072	1.163E+03	9.315E+05	6.259E+01	3.107E+02	4.658E+05	3.129E+01	
2072	1.129E+03	9.040E+05	6.074E+01	3.015E+02	4.520E+05	3.037E+01	
2074	1.096E+03	8.773E+05	5.894E+01	2.926E+02	4.386E+05	2.947E+01	
2074	1.063E+03	8.513E+05	5.720E+01	2.840E+02	4.366E+05 4.257E+05	2.860E+01	
2076	1.032E+03	8.262E+05	5.720E+01 5.551E+01	2.756E+02	4.237E+05 4.131E+05	2.776E+01	
2076	1.001E+03	8.018E+05	5.387E+01	2.674E+02	4.131E+05 4.009E+05	2.694E+01	
2078	9.717E+02	7.781E+05	5.228E+01		3.890E+05	2.694E+01 2.614E+01	
2018	9.717E+02	7.781E+U5	5.228E+01	2.595E+02	3.890E+05	∠.014E+U1	

Year	Total landfill gas			Methane			
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2079	9.429E+02	7.551E+05	5.073E+01	2.519E+02	3.775E+05	2.537E+01	
2080	9.151E+02	7.328E+05	4.923E+01	2.444E+02	3.664E+05	2.462E+01	
2081	8.880E+02	7.111E+05	4.778E+01	2.372E+02	3.555E+05	2.389E+01	
2082	8.618E+02	6.901E+05	4.637E+01	2.302E+02	3.450E+05	2.318E+01	
2083	8.363E+02	6.697E+05	4.500E+01	2.234E+02	3.348E+05	2.250E+01	
2084	8.116E+02	6.499E+05	4.367E+01	2.168E+02	3.249E+05	2.183E+01	
2085	7.876E+02	6.307E+05	4.238E+01	2.104E+02	3.153E+05	2.119E+01	
2086	7.643E+02	6.120E+05	4.112E+01	2.042E+02	3.060E+05	2.056E+01	
2087	7.417E+02	5.940E+05	3.991E+01	1.981E+02	2.970E+05	1.995E+01	
.088	7.198E+02	5.764E+05	3.873E+01	1.923E+02	2.882E+05	1.936E+01	
2089	6.986E+02	5.594E+05	3.758E+01	1.866E+02	2.797E+05	1.879E+01	
090	6.779E+02	5.428E+05	3.647E+01	1.811E+02	2.714E+05	1.824E+01	
2091	6.579E+02	5.268E+05	3.540E+01	1.757E+02	2.634E+05	1.770E+01	
2092	6.384E+02	5.112E+05	3.435E+01	1.705E+02	2.556E+05	1.717E+01	
2093	6.196E+02	4.961E+05	3.333E+01	1.655E+02	2.481E+05	1.667E+01	
094	6.012E+02	4.815E+05	3.235E+01	1.606E+02	2.407E+05	1.617E+01	
095	5.835E+02	4.672E+05	3.139E+01	1.559E+02	2.336E+05	1.570E+01	
096	5.662E+02	4.534E+05	3.046E+01	1.512E+02	2.267E+05	1.523E+01	
2097	5.495E+02	4.400E+05	2.956E+01	1.468E+02	2.200E+05	1.478E+01	
098	5.333E+02	4.270E+05	2.869E+01	1.424E+02	2.135E+05	1.435E+01	
2099	5.175E+02	4.144E+05	2.784E+01	1.382E+02	2.072E+05	1.392E+01	
2100	5.022E+02	4.021E+05	2.702E+01	1.341E+02	2.011E+05	1.351E+01	
2101	4.874E+02	3.903E+05	2.622E+01	1.302E+02	1.951E+05	1.311E+01	
102	4.730E+02	3.787E+05	2.545E+01	1.263E+02	1.894E+05	1.272E+01	
2103	4.590E+02	3.675E+05	2.469E+01	1.226E+02	1.838E+05	1.235E+01	
104	4.454E+02	3.567E+05	2.396E+01	1.190E+02	1.783E+05	1.198E+01	
105	4.323E+02	3.461E+05	2.326E+01	1.155E+02	1.731E+05	1.163E+01	
106	4.195E+02	3.359E+05	2.257E+01	1.120E+02	1.679E+05	1.128E+01	
107	4.071E+02	3.260E+05	2.190E+01	1.087E+02	1.630E+05	1.095E+01	
108	3.950E+02	3.163E+05	2.125E+01	1.055E+02	1.582E+05	1.063E+01	
2109	3.834E+02	3.070E+05	2.063E+01	1.024E+02	1.535E+05	1.031E+01	
110	3.720E+02	2.979E+05	2.002E+01	9.938E+01	1.490E+05	1.001E+01	
111	3.610E+02	2.891E+05	1.943E+01	9.644E+01	1.446E+05	9.713E+00	
112	3.504E+02	2.806E+05	1.885E+01	9.359E+01	1.403E+05	9.426E+00	
2113	3.400E+02	2.723E+05	1.829E+01	9.082E+01	1.361E+05	9.147E+00	
2114	3.300E+02	2.642E+05	1.775E+01	8.814E+01	1.321E+05	8.877E+00	
2115	3.202E+02	2.564E+05	1.723E+01	8.553E+01	1.282E+05	8.614E+00	
2116	3.108E+02	2.488E+05	1.672E+01	8.301E+01	1.244E+05	8.360E+00	
2117	3.016E+02	2.415E+05	1.623E+01	8.055E+01	1.207E+05	8.113E+00	
2118	2.927E+02	2.343E+05	1.575E+01	7.817E+01	1.172E+05	7.873E+00	

Year				NMOC			
	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
1978	0	Ó	0	0	Ö	0	
1979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
1998	4.441E+01	2.426E+04	1.630E+00	1.044E-01	2.911E+01	1.956E-03	
1999	8.099E+01	4.425E+04	2.973E+00	1.903E-01	5.309E+01	3.567E-03	
2000	1.149E+02	6.276E+04	4.217E+00	2.699E-01	7.531E+01	5.060E-03	
2001	1.509E+02	8.242E+04	5.538E+00	3.545E-01	9.890E+01	6.645E-03	
2002	1.879E+02	1.026E+05	6.897E+00	4.415E-01	1.232E+02	8.276E-03	
2003	2.573E+02	1.406E+05	9.444E+00	6.046E-01	1.687E+02	1.133E-02	
2004	4.641E+02	2.536E+05	1.704E+01	1.091E+00	3.043E+02	2.044E-02	
2005	5.456E+02	2.980E+05	2.002E+01	1.282E+00	3.576E+02	2.403E-02	
2006	6.117E+02	3.342E+05	2.245E+01	1.437E+00	4.010E+02	2.694E-02	
2007	6.949E+02	3.796E+05	2.551E+01	1.633E+00	4.556E+02	3.061E-02	
2008	7.627E+02	4.167E+05	2.800E+01	1.792E+00	5.000E+02	3.359E-02	
2009	8.503E+02	4.645E+05	3.121E+01	1.998E+00	5.574E+02	3.745E-02	
2010	9.741E+02	5.322E+05	3.576E+01	2.289E+00	6.386E+02	4.291E-02	
2011	1.047E+03	5.721E+05	3.844E+01	2.461E+00	6.866E+02	4.613E-02	
2012	1.091E+03	5.960E+05	4.005E+01	2.564E+00	7.152E+02	4.806E-02	
2013	1.115E+03	6.092E+05	4.093E+01	2.620E+00	7.310E+02	4.912E-02	
2014	1.150E+03	6.285E+05	4.223E+01	2.703E+00	7.542E+02	5.067E-02	
2015	1.212E+03	6.622E+05	4.450E+01	2.849E+00	7.947E+02	5.340E-02	
2016	1.289E+03	7.042E+05	4.731E+01	3.029E+00	8.450E+02	5.678E-02	
2017	1.323E+03	7.225E+05	4.855E+01	3.108E+00	8.671E+02	5.826E-02	
2018	1.377E+03	7.525E+05	5.056E+01	3.237E+00	9.030E+02	6.067E-02	
2019	1.470E+03	8.033E+05	5.397E+01	3.455E+00	9.640E+02	6.477E-02	
2020	1.533E+03	8.376E+05	5.628E+01	3.603E+00	1.005E+03	6.753E-02	
2021	1.554E+03	8.492E+05	5.706E+01	3.653E+00	1.019E+03	6.847E-02	
2022	1.572E+03	8.586E+05	5.769E+01	3.693E+00	1.030E+03	6.922E-02	
2023	1.588E+03	8.676E+05	5.830E+01	3.732E+00	1.041E+03	6.995E-02	
2024	1.604E+03	8.764E+05	5.889E+01	3.770E+00	1.052E+03	7.066E-02	
2025	1.620E+03	8.850E+05	5.946E+01	3.807E+00	1.062E+03	7.135E-02	
2026	1.635E+03	8.932E+05	6.002E+01	3.842E+00	1.072E+03	7.202E-02	
2027	1.650E+03	9.013E+05	6.056E+01	3.877E+00	1.072E+03 1.082E+03	7.26	

Vaar	Carbon dioxide			NMOC		
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
2028	1.664E+03	9.091E+05	6.108E+01	3.910E+00	1.091E+03	7.330E-02
2029	1.678E+03	9.167E+05	6.159E+01	3.943E+00	1.100E+03	7.391E-02
2030	1.691E+03	9.240E+05	6.208E+01	3.975E+00	1.109E+03	7.450E-02
2031	1.704E+03	9.312E+05	6.256E+01	4.005E+00	1.117E+03	7.508E-02
2032	1.717E+03	9.381E+05	6.303E+01	4.035E+00	1.126E+03	7.564E-02
2033	1.729E+03	9.448E+05	6.348E+01	4.064E+00	1.134E+03	7.618E-02
2034	1.741E+03	9.513E+05	6.392E+01	4.092E+00	1.142E+03	7.670E-02
2035	1.753E+03	9.576E+05	6.434E+01	4.119E+00	1.149E+03	7.721E-02
2036	1.764E+03	9.638E+05	6.476E+01	4.146E+00	1.157E+03	7.771E-02
2037	1.775E+03	9.697E+05	6.516E+01	4.171E+00	1.164E+03	7.819E-02
2038	1.786E+03	9.755E+05	6.555E+01	4.196E+00	1.171E+03	7.865E-02
2039	1.796E+03	9.811E+05	6.592E+01	4.220E+00	1.177E+03	7.911E-02
2040	1.806E+03	9.866E+05	6.629E+01	4.244E+00	1.184E+03	7.955E-02
2041	1.816E+03	9.919E+05	6.664E+01	4.266E+00	1.190E+03	7.997E-02
2042	1.825E+03	9.970E+05	6.699E+01	4.288E+00	1.196E+03	8.039E-02
2043	1.834E+03	1.002E+06	6.732E+01	4.310E+00	1.202E+03	8.079E-02
2044	1.843E+03	1.007E+06	6.765E+01	4.331E+00	1.208E+03	8.118E-02
2045	1.852E+03	1.011E+06	6.796E+01	4.351E+00	1.214E+03	8.155E-02
2046	1.860E+03	1.016E+06	6.827E+01	4.370E+00	1.219E+03	8.192E-02
2047	1.805E+03	9.860E+05	6.625E+01	4.241E+00	1.183E+03	7.950E-02
2048	1.752E+03	9.569E+05	6.429E+01	4.116E+00	1.148E+03	7.715E-02
2049	1.700E+03	9.286E+05	6.239E+01	3.994E+00	1.114E+03	7.487E-02
2050	1.650E+03	9.011E+05	6.055E+01	3.876E+00	1.081E+03	7.266E-02
2051	1.601E+03	8.745E+05	5.876E+01	3.762E+00	1.049E+03	7.051E-02
2052	1.553E+03	8.487E+05	5.702E+01	3.650E+00	1.018E+03	6.843E-02
2053	1.508E+03	8.236E+05	5.534E+01	3.543E+00	9.883E+02	6.640E-02
2054	1.463E+03	7.992E+05	5.370E+01	3.438E+00	9.591E+02	6.444E-02
2055	1.420E+03	7.756E+05	5.211E+01	3.336E+00	9.307E+02	6.254E-02
2056	1.378E+03	7.527E+05	5.057E+01	3.238E+00	9.032E+02	6.069E-02
2057	1.337E+03	7.304E+05	4.908E+01	3.142E+00	8.765E+02	5.889E-02
2058	1.298E+03	7.089E+05	4.763E+01	3.049E+00	8.506E+02	5.715E-02
2059	1.259E+03	6.879E+05	4.622E+01	2.959E+00	8.255E+02	5.546E-02
2060	1.222E+03	6.676E+05	4.485E+01	2.872E+00	8.011E+02	5.383E-02
2061	1.186E+03	6.479E+05	4.353E+01	2.787E+00	7.774E+02	5.223E-02
2062	1.151E+03	6.287E+05	4.224E+01	2.704E+00	7.544E+02	5.069E-02
2063	1.117E+03	6.101E+05	4.099E+01	2.624E+00	7.321E+02	4.919E-02
2064	1.084E+03	5.921E+05	3.978E+01	2.547E+00	7.105E+02	4.774E-02
2065	1.052E+03	5.746E+05	3.861E+01	2.472E+00	6.895E+02	4.633E-02
2066	1.021E+03	5.576E+05	3.747E+01	2.398E+00	6.691E+02	4.496E-02
2067	9.905E+02	5.411E+05	3.636E+01	2.328E+00	6.494E+02	4.363E-02
2068	9.613E+02	5.251E+05	3.528E+01	2.259E+00	6.302E+02	4.234E-02
2069	9.329E+02	5.096E+05	3.424E+01	2.192E+00	6.115E+02	4.109E-02
2070	9.053E+02	4.946E+05	3.323E+01	2.127E+00	5.935E+02	3.987E-02
2071	8.785E+02	4.799E+05	3.225E+01	2.064E+00	5.759E+02	3.870E-02
2072	8.526E+02	4.658E+05	3.129E+01	2.003E+00	5.589E+02	3.755E-02
2073	8.274E+02	4.520E+05	3.037E+01	1.944E+00	5.424E+02	3.644E-02
2074	8.029E+02	4.386E+05	2.947E+01	1.887E+00	5.264E+02	3.537E-02
2075	7.792E+02	4.257E+05	2.860E+01	1.831E+00	5.108E+02	3.432E-02
2076	7.562E+02	4.131E+05	2.776E+01	1.777E+00	4.957E+02	3.331E-02
2077	7.338E+02	4.009E+05	2.694E+01	1.724E+00	4.811E+02	3.232E-02
2078	7.121E+02	3.890E+05	2.614E+01	1.673E+00	4.668E+02	3.137E-02

Year	Carbon dioxide			NMOC		
	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
2079	6.911E+02	3.775E+05	2.537E+01	1.624E+00	4.530E+02	3.044E-02
2080	6.707E+02	3.664E+05	2.462E+01	1.576E+00	4.397E+02	2.954E-02
2081	6.508E+02	3.555E+05	2.389E+01	1.529E+00	4.267E+02	2.867E-02
2082	6.316E+02	3.450E+05	2.318E+01	1.484E+00	4.140E+02	2.782E-02
2083	6.129E+02	3.348E+05	2.250E+01	1.440E+00	4.018E+02	2.700E-02
2084	5.948E+02	3.249E+05	2.183E+01	1.398E+00	3.899E+02	2.620E-02
2085	5.772E+02	3.153E+05	2.119E+01	1.356E+00	3.784E+02	2.543E-02
2086	5.602E+02	3.060E+05	2.056E+01	1.316E+00	3.672E+02	2.467E-02
2087	5.436E+02	2.970E+05	1.995E+01	1.277E+00	3.564E+02	2.394E-02
2088	5.276E+02	2.882E+05	1.936E+01	1.240E+00	3.458E+02	2.324E-02
2089	5.120E+02	2.797E+05	1.879E+01	1.203E+00	3.356E+02	2.255E-02
2090	4.968E+02	2.714E+05	1.824E+01	1.167E+00	3.257E+02	2.188E-02
2091	4.821E+02	2.634E+05	1.770E+01	1.133E+00	3.161E+02	2.124E-02
2092	4.679E+02	2.556E+05	1.717E+01	1.099E+00	3.067E+02	2.061E-02
2093	4.541E+02	2.481E+05	1.667E+01	1.067E+00	2.977E+02	2.000E-02
2094	4.406E+02	2.407E+05	1.617E+01	1.035E+00	2.889E+02	1.941E-02
2095	4.276E+02	2.336E+05	1.570E+01	1.005E+00	2.803E+02	1.884E-02
2096	4.150E+02	2.267E+05	1.523E+01	9.752E-01	2.720E+02	1.828E-02
2097	4.027E+02	2.200E+05	1.478E+01	9.463E-01	2.640E+02	1.774E-02
2098	3.908E+02	2.135E+05	1.435E+01	9.184E-01	2.562E+02	1.721E-02
2099	3.793E+02	2.072E+05	1.392E+01	8.912E-01	2.486E+02	1.671E-02
2100	3.681E+02	2.011E+05	1.351E+01	8.649E-01	2.413E+02	1.621E-02
2101	3.572E+02	1.951E+05	1.311E+01	8.393E-01	2.342E+02	1.573E-02
2102	3.466E+02	1.894E+05	1.272E+01	8.145E-01	2.272E+02	1.527E-02
2103	3.364E+02	1.838E+05	1.235E+01	7.904E-01	2.205E+02	1.482E-02
2104	3.264E+02	1.783E+05	1.198E+01	7.671E-01	2.140E+02	1.438E-02
2105	3.168E+02	1.731E+05	1.163E+01	7.444E-01	2.077E+02	1.395E-02
2106	3.074E+02	1.679E+05	1.128E+01	7.224E-01	2.015E+02	1.354E-02
2107	2.983E+02	1.630E+05	1.095E+01	7.011E-01	1.956E+02	1.314E-02
2108	2.895E+02	1.582E+05	1.063E+01	6.803E-01	1.898E+02	1.275E-02
2109	2.810E+02	1.535E+05	1.031E+01	6.602E-01	1.842E+02	1.238E-02
2110	2.727E+02	1.490E+05	1.001E+01	6.407E-01	1.787E+02	1.201E-02
2111	2.646E+02	1.446E+05	9.713E+00	6.218E-01	1.735E+02	1.166E-02
2112	2.568E+02	1.403E+05	9.426E+00	6.034E-01	1.683E+02	1.131E-02
2113	2.492E+02	1.361E+05	9.147E+00	5.856E-01	1.634E+02	1.098E-02
2114	2.418E+02	1.321E+05	8.877E+00	5.683E-01	1.585E+02	1.065E-02
2115	2.347E+02	1.282E+05	8.614E+00	5.515E-01	1.539E+02	1.034E-02
2116	2.278E+02	1.244E+05	8.360E+00	5.352E-01	1.493E+02	1.003E-02
2117	2.210E+02	1.207E+05	8.113E+00	5.194E-01	1.449E+02	9.735E-03
2118	2.145E+02	1.172E+05	7.873E+00	5.040E-01	1.406E+02	9.447E-03



# **Summary Report**

Landfill Name or Identifier: Organic waste CB Landfill Model

Date: Monday, May 10, 2021

**Description/Comments:** 

#### **About LandGEM:**

First-Order Decomposition Rate Equation:

 $Q_{CH_4} = \sum_{i=1}^{n} \sum_{j=0,1}^{1} k L_o \left(\frac{M_i}{10}\right) e^{-kt_{ij}}$ 

Where

 $Q_{CH4}$  = annual methane generation in the year of the calculation ( $m^3/year$ )

i = 1-year time increment

n = (year of the calculation) - (initial year of waste acceptance)

j = 0.1-year time increment

 $k = methane generation rate (year^{-1})$ 

 $L_o$  = potential methane generation capacity  $(m^3/Mg)$ 

 $M_i$  = mass of waste accepted in the  $i^{th}$  year (Mg)  $t_{ij}$  = age of the  $j^{th}$  section of waste mass  $M_i$  accepted in the  $i^{th}$  year ( $decimal\ years$ , e.g., 3.2 years)

LandGEM is based on a first-order decomposition rate equation for quantifying emissions from the decomposition of landfilled waste in municipal solid waste (MSW) landfills. The software provides a relatively simple approach to estimating landfill gas emissions. Model defaults are based on empirical data from U.S. landfills. Field test data can also be used in place of model defaults when available. Further guidance on EPA test methods, Clean Air Act (CAA) regulations, and other guidance regarding landfill gas emissions and control technology requirements can be found at http://www.epa.gov/ttnatw01/landfill/landfilpg.html.

LandGEM is considered a screening tool — the better the input data, the better the estimates. Often, there are limitations with the available data regarding waste quantity and composition, variation in design and operating practices over time, and changes occurring over time that impact the emissions potential. Changes to landfill operation, such as operating under wet conditions through leachate recirculation or other liquid additions, will result in generating more gas at a faster rate. Defaults for estimating emissions for this type of operation are being developed to include in LandGEM along with defaults for convential landfills (no leachate or liquid additions) for developing emission inventories and determining CAA applicability. Refer to the Web site identified above for future updates.

# **Input Review**

LANDFILL CHARACTERISTICS

Landfill Open Year1978Landfill Closure Year (with 80-year limit)2045Actual Closure Year (without limit)2045Have Model Calculate Closure Year?No

Waste Design Capacity megagrams

MODEL PARAMETERS

Methane Generation Rate, k 0.050  $year^{-1}$  Potential Methane Generation Capacity, L<sub>o</sub> 130  $m^3/Mg$ 

NMOC Concentration600ppmv as hexaneMethane Content50% by volume

GASES / POLLUTANTS SELECTED

Gas / Pollutant #1: Total landfill gas
Gas / Pollutant #2: Methane
Gas / Pollutant #3: Carbon dioxide
Gas / Pollutant #4: NMOC

# WASTE ACCEPTANCE RATES

Year	Waste Acc		Waste-In-Place		
	(Mg/year)	(short tons/year)	(Mg)	(short tons)	
1978	0	0	0	0	
1979	0	0	0	0	
1980	0	0	0	0	
1981	0	0	0	0	
1982	0	0	0	0	
1983	0	0	0	0	
1984	0	0	0	0	
1985	0	0	0	0	
1986	0	0	0	0	
1987	0	0	0	0	
1988	0	0	0	0	
1989	0	0	0	0	
1990	0	0	0	0	
1991	0	0	0	0	
1992	0	0	0	0	
1993	0	0	0	0	
1994	0	0	0	0	
1995	0	0	0	0	
1996	0	0	0	0	
1997	0	0	0	0	
1998	0	0	0	0	
1999	0	0	0	0	
2000	0	0	0	0	
2001	0	0	0	0	
2002	0	0	0	0	
2003	0	0	0	0	
2004	0	0	0	0	
2005	0	0	0	0	
2006	0	0	0	0	
2007	0	0	0	0	
2008	0	0	0	0	
2009	0	0	0	0	
2010	0	0	0	0	
2011	0	0	0	0	
2012	0	0	0	0	
2013	0	0	0	0	
2014	0	0	0	0	
2015	2,610	2,871	0	0	
2016	2,690	2,959	2,610	2,871	
2017	2,807	3,088	5,300	5,830	

#### WASTE ACCEPTANCE RATES (Continued)

WASI	NASTE ACCEPTANCE RATES (Continued)							
Year	Waste Ac		Waste-	In-Place				
	(Mg/year)	(short tons/year)	(Mg)	(short tons)				
2018	2,781	3,059	8,107	8,918				
2019	27,106	29,817	10,888					
2020	17,744	19,518	37,994					
2021	21,818	24,000	55,738					
2022	21,818	24,000	77,556					
2023	21,818	24,000	99,374	109,312				
2024	21,818	24,000	121,192	133,312				
2025	21,818	24,000	143,010					
2026	21,818	24,000	164,829	181,312				
2027	21,818	24,000	186,647	205,312				
2028	21,818	24,000	208,465	229,312				
2029	21,818	24,000	230,283					
2030	21,818	24,000	252,101	277,312				
2031	21,818	24,000	273,920	301,312				
2032	21,818	24,000	295,738	325,312				
2033	21,818	24,000	317,556	349,312				
2034	21,818	24,000	339,374	373,312				
2035	21,818	24,000	361,192	397,312				
2036	21,818	24,000	383,010					
2037	21,818	24,000	404,829	445,312				
2038	21,818	24,000	426,647	469,312				
2039	21,818	24,000	448,465	493,312				
2040	21,818	24,000	470,283	517,312				
2041	21,818	24,000	492,101	541,312				
2042	21,818	24,000	513,920	565,312				
2043	21,818	24,000	535,738	589,312				
2044	21,818	24,000	557,556	613,312				
2045	21,818	24,000	579,374	637,312				
2046	0	0	601,192	661,312				
2047	0	0	601,192	661,312				
2048	0	0	601,192	661,312				
2049	0	0	601,192	661,312				
2050	0	0	601,192	661,312				
2051	0	0	601,192	661,312				
2052	0	0	601,192	661,312				
2053	0	0	601,192					
2054	0	0	601,192					
2055	0	0	601,192					
2056	0	0	601,192					
2057	0	0	601,192					

## **Pollutant Parameters**

Gas / Pollutant Default Parameters:	User-specified Pollutant Parameters:


	Gas / Poi	lutant Default Paran	User-specified Pollutant Parameters:		
	_	Concentration		Concentration	
	Compound	(ppmv)	Molecular Weight	(ppmv)	Molecular Weight
١ "	Total landfill gas		0.00		
Se l	Methane		16.04		
Gases	Carbon dioxide		44.01		
ľ	NMOC	4,000	86.18		
	1,1,1-Trichloroethane				
	(methyl chloroform) -				
	HAP	0.48	133.41		
	1,1,2,2-				
	Tetrachloroethane -				
	HAP/VOC	1.1	167.85		
	1,1-Dichloroethane				
	(ethylidene dichloride) -				
	HAP/VOC	2.4	98.97		
	1,1-Dichloroethene	2.7	00.01		
	(vinylidene chloride) -				
	HAP/VOC	0.20	96.94		
	1,2-Dichloroethane	0.20	30.34		
	(ethylene dichloride) -	0.44	00.00		
	HAP/VOC	0.41	98.96		
1	1,2-Dichloropropane				
	(propylene dichloride) -				
	HAP/VOC	0.18	112.99		
	2-Propanol (isopropyl				
	alcohol) - VOC	50	60.11		
	Acetone	7.0	58.08		
	Acrylonitrile - HAP/VOC				
	Acryloriume - TIAI 7000	6.3	53.06		
	Benzene - No or				
	Unknown Co-disposal -				
	HAP/VOC	1.9	78.11		
	Benzene - Co-disposal -				
ω.	HAP/VOC	11	78.11		
l ä	Bromodichloromethane -				
L ta	voc	3.1	163.83		
Pollutants	Butane - VOC	5.0	58.12		
۵	Carbon disulfide -				
	HAP/VOC	0.58	76.13		
	Carbon monoxide	140	28.01		
	Carbon tetrachloride -				
	HAP/VOC	4.0E-03	153.84		
	Carbonyl sulfide -	1.02 00	100.01		
	HAP/VOC	0.49	60.07		
	Chlorobenzene -	0.10	00.01		
	HAP/VOC	0.25	112.56		
	Chlorodifluoromethane	1.3	86.47		
	Chloroethane (ethyl	1.0	00.41		
	chloride) - HAP/VOC	1.3	64.52		
	Chloroform - HAP/VOC	0.03	119.39		
	Chloromethane - VOC	1.2	50.49		
	Chloroniethane - VCC	1.2	30.49		
1	Dichlorobenzene - (HAP				
1	for para isomer/VOC)	0.21	147		
1	,	U.Z I	147		
	Dichlorodifluoromethane	10	120.04		
1	Dialalanduananathana	16	120.91		
1	Dichlorofluoromethane -	0.0	400.00		
1	VOC	2.6	102.92		
1	Dichloromethane				
	(methylene chloride) -				
1	HAP	14	84.94		
1	Dimethyl sulfide (methyl				
1	sulfide) - VOC	7.8	62.13		
1	Ethane	890	30.07		
	Ethanol - VOC	27	46.08		


# **Pollutant Parameters (Continued)**


Gas / Pollutant Default Parameters:				User-sp	ecified Pol	lutant Parameters:

	Gas / Pol	User-specified Pollutant Parameters:			
	Compound	Concentration (ppmv)	Molecular Weight	Concentration (ppmv)	Molecular Weight
	Ethyl mercaptan (ethanethiol) - VOC	2.3	62.13		
	Ethylbenzene -				
	HAP/VOC Ethylene dibromide -	4.6	106.16		
	HAP/VOC Fluorotrichloromethane -	1.0E-03	187.88		
	VOC	0.76	137.38		
	Hexane - HAP/VOC	6.6	86.18		
	Hydrogen sulfide	36	34.08		
	Mercury (total) - HAP	2.9E-04	200.61		
	Methyl ethyl ketone - HAP/VOC	7.1	72.11		
	Methyl isobutyl ketone - HAP/VOC	1.9	100.16		
	Methyl mercaptan - VOC	2.5	48.11		
	Pentane - VOC	3.3	72.15		
	Perchloroethylene	0.0	12.10		
	(tetrachloroethylene) -				
	HAP	3.7	165.83		
	Propane - VOC	11	44.09		
	t-1,2-Dichloroethene -				
	VOC	2.8	96.94		
	Toluene - No or				
	Unknown Co-disposal -				
	HAP/VOC	39	92.13		
	Toluene - Co-disposal - HAP/VOC	170	92.13		
	Trichloroethylene	170	92.13		
	(trichloroethene) -				
nts	HAP/VOC	2.8	131.40		
Iţa	Vinyl chloride -	2.0	101.40		
Pollutants	HAP/VOC	7.3	62.50		
۵	Xylenes - HAP/VOC	12	106.16		
ı					
1					
1					

#### **Graphs**

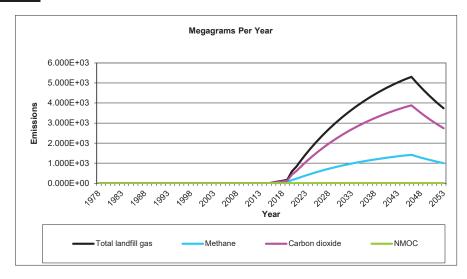

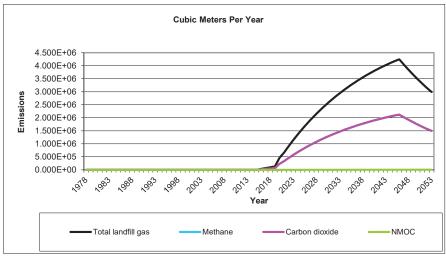

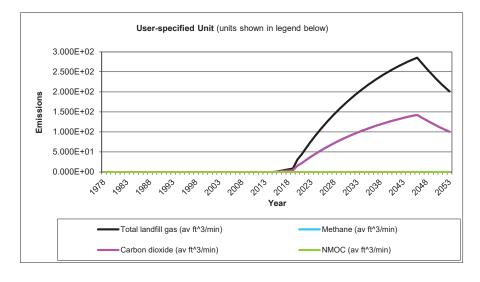

## Results

Year Total landfill gas Methane						
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
1978	0	0	0	0	0	0
1979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1998	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1999	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2000	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2001	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2002	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2003	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2004	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2005	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2006	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2007	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2008	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2009	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2010	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2011	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2012	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2013	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2014	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2015	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2016	4.144E+01	3.318E+04	2.229E+00	1.107E+01	1.659E+04	1.115E+00
2017	8.212E+01	6.575E+04	4.418E+00	2.193E+01	3.288E+04	2.209E+00
2018	1.227E+02	9.823E+04	6.600E+00	3.277E+01	4.912E+04	3.300E+00
2019	1.608E+02	1.288E+05	8.654E+00	4.296E+01	6.440E+04	4.327E+00
2020	5.833E+02	4.671E+05	3.138E+01	1.558E+02	2.335E+05	1.569E+01
2021	8.365E+02	6.699E+05	4.501E+01	2.234E+02	3.349E+05	2.250E+01
2022	1.142E+03	9.145E+05	6.145E+01	3.051E+02	4.573E+05	3.072E+01
2023	1.433E+03	1.147E+06	7.709E+01	3.827E+02	5.737E+05	3.854E+01
2024	1.709E+03	1.369E+06	9.196E+01	4.566E+02	6.844E+05	4.598E+01
2025	1.972E+03	1.579E+06	1.061E+02	5.268E+02	7.897E+05	5.306E+01
2026	2.222E+03	1.780E+06	1.196E+02	5.936E+02	8.898E+05	5.979E+01
2027	2.460E+03	1.970E+06	1.324E+02	6.572E+02	9.851E+05	6.619E+01

Year Total landfill gas			Methane			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
2028	2.687E+03	2.151E+06	1.446E+02	7.177E+02	1.076E+06	7.228E+01
2029	2.902E+03	2.324E+06	1.561E+02	7.752E+02	1.162E+06	7.807E+01
2030	3.107E+03	2.488E+06	1.672E+02	8.299E+02	1.244E+06	8.358E+01
2031	3.302E+03	2.644E+06	1.776E+02	8.819E+02	1.322E+06	8.882E+01
2032	3.487E+03	2.792E+06	1.876E+02	9.314E+02	1.396E+06	9.381E+01
2033	3.663E+03	2.934E+06	1.971E+02	9.785E+02	1.467E+06	9.855E+01
2034	3.831E+03	3.068E+06	2.061E+02	1.023E+03	1.534E+06	1.031E+02
2035	3.991E+03	3.196E+06	2.147E+02	1.066E+03	1.598E+06	1.074E+02
2036	4.142E+03	3.317E+06	2.229E+02	1.106E+03	1.659E+06	1.114E+02
2037	4.287E+03	3.433E+06	2.306E+02	1.145E+03	1.716E+06	1.153E+02
2038	4.424E+03	3.543E+06	2.380E+02	1.182E+03	1.771E+06	1.190E+02
2039	4.555E+03	3.647E+06	2.451E+02	1.217E+03	1.824E+06	1.225E+02
2040	4.679E+03	3.747E+06	2.517E+02	1.250E+03	1.873E+06	1.259E+02
2041	4.797E+03	3.841E+06	2.581E+02	1.281E+03	1.921E+06	1.290E+02
2042	4.909E+03	3.931E+06	2.641E+02	1.311E+03	1.966E+06	1.321E+02
2043	5.016E+03	4.017E+06	2.699E+02	1.340E+03	2.008E+06	1.349E+02
2044	5.118E+03	4.098E+06	2.754E+02	1.367E+03	2.049E+06	1.377E+02
2045	5.215E+03	4.176E+06	2.806E+02	1.393E+03	2.088E+06	1.403E+02
2046	5.307E+03	4.250E+06	2.855E+02	1.418E+03	2.125E+06	1.428E+02
2047	5.048E+03	4.042E+06	2.716E+02	1.348E+03	2.021E+06	1.358E+02
2048	4.802E+03	3.845E+06	2.584E+02	1.283E+03	1.923E+06	1.292E+02
2049	4.568E+03	3.658E+06	2.458E+02	1.220E+03	1.829E+06	1.229E+02
2050	4.345E+03	3.479E+06	2.338E+02	1.161E+03	1.740E+06	1.169E+02
2051	4.133E+03	3.310E+06	2.224E+02	1.104E+03	1.655E+06	1.112E+02
2052	3.931E+03	3.148E+06	2.115E+02	1.050E+03	1.574E+06	1.058E+02
2053	3.740E+03	2.995E+06	2.012E+02	9.989E+02	1.497E+06	1.006E+02
2054	3.557E+03	2.849E+06	1.914E+02	9.502E+02	1.424E+06	9.570E+01
2055	3.384E+03	2.710E+06	1.821E+02	9.039E+02	1.355E+06	9.103E+01
2056	3.219E+03	2.577E+06	1.732E+02	8.598E+02	1.289E+06	8.659E+01
2057	3.062E+03	2.452E+06	1.647E+02	8.178E+02	1.226E+06	8.237E+01
2058	2.912E+03	2.332E+06	1.567E+02	7.780E+02	1.166E+06	7.835E+01
2059	2.770E+03	2.218E+06	1.491E+02	7.400E+02	1.109E+06	7.453E+01
2060	2.635E+03	2.110E+06	1.418E+02	7.039E+02	1.055E+06	7.089E+01
2061	2.507E+03	2.007E+06	1.349E+02	6.696E+02	1.004E+06	6.744E+01
2062	2.385E+03	1.909E+06	1.283E+02	6.369E+02	9.547E+05	6.415E+01
2063	2.268E+03	1.816E+06	1.220E+02	6.059E+02	9.082E+05	6.102E+01
2064	2.158E+03	1.728E+06	1.161E+02	5.763E+02	8.639E+05	5.804E+01
2065	2.052E+03	1.643E+06	1.104E+02	5.482E+02	8.217E+05	5.521E+01
2066	1.952E+03	1.563E+06	1.050E+02	5.215E+02	7.817E+05	5.252E+01
2067	1.857E+03	1.487E+06	9.992E+01	4.960E+02	7.435E+05	4.996E+01
2068	1.767E+03	1.415E+06	9.504E+01	4.719E+02	7.073E+05	4.752E+01
2069	1.680E+03	1.346E+06	9.041E+01	4.488E+02	6.728E+05	4.520E+01
2070	1.598E+03	1.280E+06	8.600E+01	4.270E+02	6.400E+05	4.300E+01
2071	1.520E+03	1.218E+06	8.180E+01	4.061E+02	6.088E+05	4.090E+01
2072	1.446E+03	1.158E+06	7.781E+01	3.863E+02	5.791E+05	3.891E+01
2073	1.376E+03	1.102E+06	7.402E+01	3.675E+02	5.508E+05	3.701E+01
2074	1.309E+03	1.048E+06	7.041E+01	3.496E+02	5.240E+05	3.520E+01
2075	1.245E+03	9.968E+05	6.698E+01	3.325E+02	4.984E+05	3.349E+01
2076	1.184E+03	9.482E+05	6.371E+01	3.163E+02	4.741E+05	3.185E+01
2077	1.126E+03	9.019E+05	6.060E+01	3.009E+02	4.510E+05	3.030E+01
2078	1.071E+03	8.580E+05	5.765E+01	2.862E+02	4.290E+05	2.882E+01

Year		Total landfill gas			Methane		
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2079	1.019E+03	8.161E+05	5.483E+01	2.722E+02	4.081E+05	2.742E+01	
2080	9.695E+02	7.763E+05	5.216E+01	2.590E+02	3.882E+05	2.608E+01	
2081	9.222E+02	7.385E+05	4.962E+01	2.463E+02	3.692E+05	2.481E+01	
2082	8.772E+02	7.024E+05	4.720E+01	2.343E+02	3.512E+05	2.360E+01	
2083	8.344E+02	6.682E+05	4.489E+01	2.229E+02	3.341E+05	2.245E+01	
2084	7.937E+02	6.356E+05	4.271E+01	2.120E+02	3.178E+05	2.135E+01	
2085	7.550E+02	6.046E+05	4.062E+01	2.017E+02	3.023E+05	2.031E+01	
2086	7.182E+02	5.751E+05	3.864E+01	1.918E+02	2.876E+05	1.932E+01	
2087	6.832E+02	5.471E+05	3.676E+01	1.825E+02	2.735E+05	1.838E+01	
2088	6.499E+02	5.204E+05	3.496E+01	1.736E+02	2.602E+05	1.748E+01	
2089	6.182E+02	4.950E+05	3.326E+01	1.651E+02	2.475E+05	1.663E+01	
090	5.880E+02	4.709E+05	3.164E+01	1.571E+02	2.354E+05	1.582E+01	
2091	5.593E+02	4.479E+05	3.009E+01	1.494E+02	2.239E+05	1.505E+01	
2092	5.321E+02	4.261E+05	2.863E+01	1.421E+02	2.130E+05	1.431E+01	
2093	5.061E+02	4.053E+05	2.723E+01	1.352E+02	2.026E+05	1.362E+01	
094	4.814E+02	3.855E+05	2.590E+01	1.286E+02	1.928E+05	1.295E+01	
095	4.580E+02	3.667E+05	2.464E+01	1.223E+02	1.834E+05	1.232E+01	
096	4.356E+02	3.488E+05	2.344E+01	1.164E+02	1.744E+05	1.172E+01	
097	4.144E+02	3.318E+05	2.229E+01	1.107E+02	1.659E+05	1.115E+01	
098	3.942E+02	3.156E+05	2.121E+01	1.053E+02	1.578E+05	1.060E+01	
2099	3.749E+02	3.002E+05	2.017E+01	1.002E+02	1.501E+05	1.009E+01	
2100	3.567E+02	2.856E+05	1.919E+01	9.527E+01	1.428E+05	9.594E+00	
2101	3.393E+02	2.717E+05	1.825E+01	9.062E+01	1.358E+05	9.126E+00	
102	3.227E+02	2.584E+05	1.736E+01	8.620E+01	1.292E+05	8.681E+00	
103	3.070E+02	2.458E+05	1.652E+01	8.200E+01	1.229E+05	8.258E+00	
104	2.920E+02	2.338E+05	1.571E+01	7.800E+01	1.169E+05	7.855E+00	
105	2.778E+02	2.224E+05	1.494E+01	7.419E+01	1.112E+05	7.472E+00	
106	2.642E+02	2.116E+05	1.422E+01	7.057E+01	1.058E+05	7.108E+00	
107	2.513E+02	2.013E+05	1.352E+01	6.713E+01	1.006E+05	6.761E+00	
2108	2.391E+02	1.914E+05	1.286E+01	6.386E+01	9.572E+04	6.431E+00	
2109	2.274E+02	1.821E+05	1.224E+01	6.074E+01	9.105E+04	6.118E+00	
110	2.163E+02	1.732E+05	1.164E+01	5.778E+01	8.661E+04	5.819E+00	
111	2.058E+02	1.648E+05	1.107E+01	5.496E+01	8.239E+04	5.535E+00	
2112	1.957E+02	1.567E+05	1.053E+01	5.228E+01	7.837E+04	5.266E+00	
2113	1.862E+02	1.491E+05	1.002E+01	4.973E+01	7.455E+04	5.009E+00	
2114	1.771E+02	1.418E+05	9.529E+00	4.731E+01	7.091E+04	4.764E+00	
2115	1.685E+02	1.349E+05	9.064E+00	4.500E+01	6.745E+04	4.532E+00	
2116	1.603E+02	1.283E+05	8.622E+00	4.281E+01	6.416E+04	4.311E+00	
2117	1.524E+02	1.221E+05	8.202E+00	4.072E+01	6.103E+04	4.101E+00	
2118	1.450E+02	1.161E+05	7.802E+00	3.873E+01	5.806E+04	3.901E+00	

Year		Carbon dioxide			NMOC	
	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
1978	0	0	0	0	0	0
1979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1998	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1999	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2000	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2001	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2002	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2003	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2004	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2005	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2006	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2007	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2008	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2009	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2010	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2011	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2012	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2013	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2014	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2015	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
2016	3.037E+01	1.659E+04	1.115E+00	7.136E-02	1.991E+01	1.338E-03
2017	6.018E+01	3.288E+04	2.209E+00	1.414E-01	3.945E+01	2.651E-03
2018	8.991E+01	4.912E+04	3.300E+00	2.113E-01	5.894E+01	3.960E-03
2019	1.179E+02	6.440E+04	4.327E+00	2.770E-01	7.728E+01	5.192E-03
2020	4.275E+02	2.335E+05	1.569E+01	1.005E+00	2.803E+02	1.883E-02
2021	6.131E+02	3.349E+05	2.250E+01	1.441E+00	4.019E+02	2.700E-02
2022	8.370E+02	4.573E+05	3.072E+01	1.967E+00	5.487E+02	3.687E-02
2023	1.050E+03	5.737E+05	3.854E+01	2.467E+00	6.884E+02	4.625E-02
2024	1.253E+03	6.844E+05	4.598E+01	2.944E+00	8.212E+02	5.518E-02
2025	1.445E+03	7.897E+05	5.306E+01	3.397E+00	9.476E+02	6.367E-02
2026	1.629E+03	8.898E+05	5.979E+01	3.827E+00	1.068E+03	7.174E-02
2027	1.803E+03	9.851E+05	6.619E+01	4.237E+00	1.182E+03	7.943E-02

V		Carbon dioxide			NMOC			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)		
2028	1.969E+03	1.076E+06	7.228E+01	4.627E+00	1.291E+03	8.673E-02		
2029	2.127E+03	1.162E+06	7.807E+01	4.998E+00	1.394E+03	9.369E-02		
2030	2.277E+03	1.244E+06	8.358E+01	5.351E+00	1.493E+03	1.003E-01		
2031	2.420E+03	1.322E+06	8.882E+01	5.686E+00	1.586E+03	1.066E-01		
2032	2.556E+03	1.396E+06	9.381E+01	6.005E+00	1.675E+03	1.126E-01		
2033	2.685E+03	1.467E+06	9.855E+01	6.309E+00	1.760E+03	1.183E-01		
2034	2.808E+03	1.534E+06	1.031E+02	6.598E+00	1.841E+03	1.237E-01		
2035	2.925E+03	1.598E+06	1.074E+02	6.873E+00	1.917E+03	1.288E-01		
2036	3.036E+03	1.659E+06	1.114E+02	7.134E+00	1.990E+03	1.337E-01		
2037	3.142E+03	1.716E+06	1.153E+02	7.382E+00	2.060E+03	1.384E-01		
2038	3.242E+03	1.771E+06	1.190E+02	7.619E+00	2.126E+03	1.428E-01		
2039	3.338E+03	1.824E+06	1.225E+02	7.844E+00	2.188E+03	1.470E-01		
2040	3.429E+03	1.873E+06	1.259E+02	8.058E+00	2.248E+03	1.510E-01		
2041	3.516E+03	1.921E+06	1.290E+02	8.261E+00	2.305E+03	1.549E-01		
2042	3.598E+03	1.966E+06	1.321E+02	8.455E+00	2.359E+03	1.585E-01		
2043	3.676E+03	2.008E+06	1.349E+02	8.639E+00	2.410E+03	1.619E-01		
2044	3.751E+03	2.049E+06	1.377E+02	8.814E+00	2.459E+03	1.652E-01		
2045	3.822E+03	2.088E+06	1.403E+02	8.981E+00	2.505E+03	1.683E-01		
2046	3.889E+03	2.125E+06	1.428E+02	9.139E+00	2.550E+03	1.713E-01		
2047	3.700E+03	2.021E+06	1.358E+02	8.694E+00	2.425E+03	1.630E-01		
2048	3.519E+03	1.923E+06	1.292E+02	8.270E+00	2.307E+03	1.550E-01		
2049	3.348E+03	1.829E+06	1.229E+02	7.866E+00	2.195E+03	1.475E-01		
2050	3.184E+03	1.740E+06	1.169E+02	7.483E+00	2.088E+03	1.403E-01		
2051	3.029E+03	1.655E+06	1.109E+02	7.118E+00	1.986E+03	1.334E-01		
2052	2.881E+03	1.574E+06	1.058E+02	6.771E+00	1.889E+03	1.269E-01		
2053	2.741E+03	1.497E+06	1.036E+02 1.006E+02	6.440E+00	1.797E+03	1.207E-01		
2054	2.607E+03	1.424E+06	9.570E+01	6.126E+00	1.709E+03	1.148E-01		
2055	2.480E+03	1.355E+06	9.103E+01	5.827E+00	1.626E+03	1.092E-01		
2056	2.460E+03 2.359E+03	1.289E+06	8.659E+01	5.543E+00	1.546E+03	1.039E-01		
2057	2.244E+03	1.226E+06	8.237E+01	5.273E+00	1.471E+03	9.884E-02		
2058	2.135E+03	1.166E+06	7.835E+01	5.273E+00 5.016E+00	1.399E+03	9.402E-02		
2059	2.030E+03	1.100E+06	7.453E+01 7.453E+01	4.771E+00	1.331E+03	9.402E-02 8.943E-02		
2060	1.931E+03	1.055E+06	7.453E+01 7.089E+01	4.771E+00 4.538E+00	1.266E+03	8.507E-02		
2061 2062	1.837E+03	1.004E+06	6.744E+01	4.317E+00	1.204E+03	8.092E-02		
	1.748E+03	9.547E+05	6.415E+01	4.107E+00	1.146E+03	7.698E-02		
2063 2064	1.662E+03 1.581E+03	9.082E+05 8.639E+05	6.102E+01	3.906E+00 3.716E+00	1.090E+03	7.322E-02 6.965E-02		
			5.804E+01		1.037E+03			
2065	1.504E+03	8.217E+05 7.817E+05	5.521E+01 5.252E+01	3.535E+00	9.861E+02	6.625E-02 6.302E-02		
2066	1.431E+03			3.362E+00	9.380E+02	6.302E-02 5.995E-02		
2067	1.361E+03	7.435E+05	4.996E+01	3.198E+00	8.922E+02			
2068	1.295E+03	7.073E+05	4.752E+01	3.042E+00	8.487E+02	5.703E-02		
2069	1.232E+03	6.728E+05	4.520E+01	2.894E+00	8.073E+02	5.424E-02		
2070	1.171E+03	6.400E+05	4.300E+01	2.753E+00	7.680E+02	5.160E-02		
2071	1.114E+03	6.088E+05	4.090E+01	2.618E+00	7.305E+02	4.908E-02		
2072	1.060E+03	5.791E+05	3.891E+01	2.491E+00	6.949E+02	4.669E-02		
2073	1.008E+03	5.508E+05	3.701E+01	2.369E+00	6.610E+02	4.441E-02		
2074	9.591E+02	5.240E+05	3.520E+01	2.254E+00	6.287E+02	4.225E-02		
2075	9.123E+02	4.984E+05	3.349E+01	2.144E+00	5.981E+02	4.019E-02		
2076	8.678E+02	4.741E+05	3.185E+01	2.039E+00	5.689E+02	3.823E-02		
2077	8.255E+02	4.510E+05	3.030E+01	1.940E+00	5.412E+02	3.636E-02		
2078	7.852E+02	4.290E+05	2.882E+01	1.845E+00	5.148E+02	3.459E-02		

Year	Carbon dioxide				NMOC		
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2079	7.470E+02	4.081E+05	2.742E+01	1.755E+00	4.897E+02	3.290E-02	
2080	7.105E+02	3.882E+05	2.608E+01	1.670E+00	4.658E+02	3.130E-02	
2081	6.759E+02	3.692E+05	2.481E+01	1.588E+00	4.431E+02	2.977E-02	
2082	6.429E+02	3.512E+05	2.360E+01	1.511E+00	4.215E+02	2.832E-02	
2083	6.116E+02	3.341E+05	2.245E+01	1.437E+00	4.009E+02	2.694E-02	
2084	5.817E+02	3.178E+05	2.135E+01	1.367E+00	3.814E+02	2.562E-02	
2085	5.534E+02	3.023E+05	2.031E+01	1.300E+00	3.628E+02	2.437E-02	
2086	5.264E+02	2.876E+05	1.932E+01	1.237E+00	3.451E+02	2.318E-02	
2087	5.007E+02	2.735E+05	1.838E+01	1.177E+00	3.282E+02	2.205E-02	
2088	4.763E+02	2.602E+05	1.748E+01	1.119E+00	3.122E+02	2.098E-02	
2089	4.530E+02	2.475E+05	1.663E+01	1.065E+00	2.970E+02	1.996E-02	
2090	4.310E+02	2.354E+05	1.582E+01	1.013E+00	2.825E+02	1.898E-02	
2091	4.099E+02	2.239E+05	1.505E+01	9.633E-01	2.687E+02	1.806E-02	
2092	3.899E+02	2.130E+05	1.431E+01	9.163E-01	2.556E+02	1.718E-02	
2093	3.709E+02	2.026E+05	1.362E+01	8.716E-01	2.432E+02	1.634E-02	
2094	3.528E+02	1.928E+05	1.295E+01	8.291E-01	2.313E+02	1.554E-02	
2095	3.356E+02	1.834E+05	1.232E+01	7.887E-01	2.200E+02	1.478E-02	
2096	3.193E+02	1.744E+05	1.172E+01	7.502E-01	2.093E+02	1.406E-02	
2097	3.037E+02	1.659E+05	1.115E+01	7.136E-01	1.991E+02	1.338E-02	
2098	2.889E+02	1.578E+05	1.060E+01	6.788E-01	1.894E+02	1.272E-02	
2099	2.748E+02	1.501E+05	1.009E+01	6.457E-01	1.801E+02	1.210E-02	
2100	2.614E+02	1.428E+05	9.594E+00	6.142E-01	1.714E+02	1.151E-02	
2101	2.486E+02	1.358E+05	9.126E+00	5.843E-01	1.630E+02	1.095E-02	
2102	2.365E+02	1.292E+05	8.681E+00	5.558E-01	1.550E+02	1.042E-02	
2103	2.250E+02	1.229E+05	8.258E+00	5.287E-01	1.475E+02	9.910E-03	
2104	2.140E+02	1.169E+05	7.855E+00	5.029E-01	1.403E+02	9.426E-03	
2105	2.036E+02	1.112E+05	7.472E+00	4.784E-01	1.335E+02	8.967E-03	
2106	1.936E+02	1.058E+05	7.108E+00	4.550E-01	1.269E+02	8.529E-03	
2107	1.842E+02	1.006E+05	6.761E+00	4.328E-01	1.208E+02	8.113E-03	
2108	1.752E+02	9.572E+04	6.431E+00	4.117E-01	1.149E+02	7.718E-03	
2109	1.667E+02	9.105E+04	6.118E+00	3.916E-01	1.093E+02	7.341E-03	
2110	1.585E+02	8.661E+04	5.819E+00	3.725E-01	1.039E+02	6.983E-03	
2111	1.508E+02	8.239E+04	5.535E+00	3.544E-01	9.886E+01	6.643E-03	
2112	1.435E+02	7.837E+04	5.266E+00	3.371E-01	9.404E+01	6.319E-03	
2113	1.365E+02	7.455E+04	5.009E+00	3.206E-01	8.945E+01	6.010E-03	
2114	1.298E+02	7.091E+04	4.764E+00	3.050E-01	8.509E+01	5.717E-03	
2115	1.235E+02	6.745E+04	4.532E+00	2.901E-01	8.094E+01	5.438E-03	
2116	1.174E+02	6.416E+04	4.311E+00	2.760E-01	7.699E+01	5.173E-03	
2117	1.117E+02	6.103E+04	4.101E+00	2.625E-01	7.324E+01	4.921E-03	
2118	1.063E+02	5.806E+04	3.901E+00	2.497E-01	6.967E+01	4.681E-03	



# **Summary Report**

Landfill Name or Identifier: C&D CB Landfill Model

Date: Monday, May 10, 2021

**Description/Comments:** 

#### **About LandGEM:**

First-Order Decomposition Rate Equation:

 $Q_{CH_4} = \sum_{i=1}^{n} \sum_{j=0,1}^{1} k L_o \left(\frac{M_i}{10}\right) e^{-kt_{ij}}$ 

Where

 $Q_{CH4}$  = annual methane generation in the year of the calculation ( $m^3/year$ )

i = 1-year time increment

n = (year of the calculation) - (initial year of waste acceptance)

j = 0.1-year time increment

 $k = methane generation rate (year^{-1})$ 

 $L_o$  = potential methane generation capacity  $(m^3/Mg)$ 

 $M_i$  = mass of waste accepted in the  $i^{th}$  year (Mg)  $t_{ij}$  = age of the  $j^{th}$  section of waste mass  $M_i$  accepted in the  $i^{th}$  year ( $decimal\ years$ , e.g., 3.2 years)

LandGEM is based on a first-order decomposition rate equation for quantifying emissions from the decomposition of landfilled waste in municipal solid waste (MSW) landfills. The software provides a relatively simple approach to estimating landfill gas emissions. Model defaults are based on empirical data from U.S. landfills. Field test data can also be used in place of model defaults when available. Further guidance on EPA test methods, Clean Air Act (CAA) regulations, and other guidance regarding landfill gas emissions and control technology requirements can be found at http://www.epa.gov/ttnatw01/landfill/landfilpg.html.

LandGEM is considered a screening tool — the better the input data, the better the estimates. Often, there are limitations with the available data regarding waste quantity and composition, variation in design and operating practices over time, and changes occurring over time that impact the emissions potential. Changes to landfill operation, such as operating under wet conditions through leachate recirculation or other liquid additions, will result in generating more gas at a faster rate. Defaults for estimating emissions for this type of operation are being developed to include in LandGEM along with defaults for convential landfills (no leachate or liquid additions) for developing emission inventories and determining CAA applicability. Refer to the Web site identified above for future updates.

#### **Input Review**

LANDFILL CHARACTERISTICS

Landfill Open Year1978Landfill Closure Year (with 80-year limit)2045Actual Closure Year (without limit)2045Have Model Calculate Closure Year?No

Waste Design Capacity megagrams

MODEL PARAMETERS

Methane Generation Rate, k 0.030  $year^{-1}$  Potential Methane Generation Capacity, L<sub>o</sub> 20  $m^3/Mg$ 

NMOC Concentration600ppmv as hexaneMethane Content50% by volume

GASES / POLLUTANTS SELECTED

Gas / Pollutant #1: Total landfill gas
Gas / Pollutant #2: Methane
Gas / Pollutant #3: Carbon dioxide
Gas / Pollutant #4: NMOC

#### WASTE ACCEPTANCE RATES

	Waste Ac		Waste-In-Place		
Year	(Mg/year)	(short tons/year)	(Mg)	(short tons)	
1978	0	0	0	0	
1979	0	0	0	0	
1980	0	0	0	0	
1981	0	0	0	0	
1982	0	0	0	0	
1983	0	0	0	0	
1984	0	0	0	0	
1985	0	0	0	0	
1986	0	0	0	0	
1987	0	0	0	0	
1988	0	0	0	0	
1989	0	0	0	0	
1990	0	0	0	0	
1991	0	0	0	0	
1992	0	0	0	0	
1993	0	0	0	0	
1994	0	0	0	0	
1995	0	0	0	0	
1996	0	0	0	0	
1997	42,445	46,690	0	0	
1998	45,738	50,312	42,445	46,690	
1999	49,698	54,668	88,184	97,002	
2000	47,705	52,476	137,882	151,670	
2001	46,303	50,933	185,587	204,146	
2002	45,715	50,287	231,890	255,079	
2003	34,835	38,318	277,605	305,366	
2004	15,247	16,772	312,440	343,684	
2005	23,248	25,573	327,687	360,456	
2006	29,273	32,200	350,936	386,029	
2007	18,242	20,067	380,208	418,229	
2008	10,279	11,307	398,451	438,296	
2009	8,485	9,334	408,730	449,603	
2010	6,258	6,884	417,216	458,937	
2011	7,355	8,091	423,474	465,821	
2012	6,330	6,963	430,829	473,912	
2013	9,488	10,437	437,159	480,875	
2014	21,376	23,514	446,647	491,312	
2015	18,200	20,020	468,023	514,826	
2016	12,848	14,133	486,223	534,845	
2017	18,880	20,768	499,071	548,978	

WASTE ACCEPTANCE RATES (Continued)

WASI	VASTE ACCEPTANCE RATES (Continued)						
Year	Waste Ac			n-Place			
	(Mg/year)	(short tons/year)	(Mg)	(short tons)			
2018	19,300	21,230	517,952	569,747			
2019	26,133	28,747	537,251	590,977			
2020	24,747	27,222	563,385	619,723			
2021	21,818	24,000	588,132	646,945			
2022	21,818	24,000	609,950	670,945			
2023	21,818	24,000	631,769	694,945			
2024	21,818	24,000	653,587	718,945			
2025	21,818	24,000	675,405	742,945			
2026	21,818	24,000	697,223	766,945			
2027	21,818	24,000	719,041	790,945			
2028	21,818	24,000	740,859	814,945			
2029	21,818	24,000	762,678	838,945			
2030	21,818	24,000	784,496	862,945			
2031	21,818	24,000	806,314	886,945			
2032	21,818	24,000	828,132	910,945			
2033	21,818	24,000	849,950	934,945			
2034	21,818	24,000	871,769	958,945			
2035	21,818	24,000	893,587	982,945			
2036	21,818	24,000	915,405	1,006,945			
2037	21,818	24,000	937,223	1,030,945			
2038	21,818	24,000	959,041	1,054,945			
2039	21,818	24,000	980,859	1,078,945			
2040	21,818	24,000	1,002,678	1,102,945			
2041	21,818	24,000	1,024,496	1,126,945			
2042	21,818	24,000	1,046,314	1,150,945			
2043	21,818	24,000	1,068,132	1,174,945			
2044	21,818	24,000	1,089,950	1,198,945			
2045	21,818	24,000	1,111,769	1,222,945			
2046	0	0	1,133,587	1,246,945			
2047	0	0	1,133,587	1,246,945			
2048	0	0	1,133,587	1,246,945			
2049	0	0	1,133,587	1,246,945			
2050	0	0	1,133,587	1,246,945			
2051	0	0	1,133,587	1,246,945			
2052	0	0	1,133,587	1,246,945			
2053	0	0	1,133,587	1,246,945			
2054	0	0	1,133,587	1,246,945			
2055	0	0	1,133,587	1,246,945			
2056	0	0	1,133,587	1,246,945			
2057	0	0	1,133,587	1,246,945			

## **Pollutant Parameters**

Gas / Pol	lutant Default Param	eters:	User-specified Pol	lutant Parameters:


	Gas / Pollutant Default Parameters:			User-specified Pollutant Parameters:		
		Concentration		Concentration		
<u></u>	Compound	(ppmv)	Molecular Weight	(ppmv)	Molecular Weight	
	Total landfill gas		0.00			
Gases	Methane		16.04			
ga	Carbon dioxide		44.01			
ľ	NMOC	4,000	86.18			
	1,1,1-Trichloroethane					
	(methyl chloroform) -					
	HAP	0.48	133.41			
	1.1.2.2-					
	Tetrachloroethane -					
	HAP/VOC	1.1	167.85			
	1,1-Dichloroethane					
	(ethylidene dichloride) -					
	HAP/VOC	2.4	98.97			
	1,1-Dichloroethene		00.01			
	(vinylidene chloride) -					
	HAP/VOC	0.20	96.94			
1	1,2-Dichloroethane	0.20	55.5-₹			
1	(ethylene dichloride) -					
1	HAP/VOC	0.41	98.96			
1	1,2-Dichloropropane	U. <del>T</del> I	30.30			
	(propylene dichloride) -					
	HAP/VOC	0.18	112.99			
		0.10	112.99			
	2-Propanol (isopropyl	Ε0	00.44			
	alcohol) - VOC	50	60.11			
	Acetone	7.0	58.08			
	Acrylonitrile - HAP/VOC	0.0	50.00			
	<u> </u>	6.3	53.06			
	Benzene - No or					
	Unknown Co-disposal -					
	HAP/VOC	1.9	78.11			
	Benzene - Co-disposal -					
ts	HAP/VOC	11	78.11			
Pollutants	Bromodichloromethane -	0.4	400.00			
≦	VOC	3.1	163.83			
9	Butane - VOC	5.0	58.12			
I -	Carbon disulfide -	0.50	70.40			
	HAP/VOC	0.58	76.13			
	Carbon monoxide	140	28.01			
	Carbon tetrachloride -	4.05.00	450.04			
	HAP/VOC	4.0E-03	153.84			
	Carbonyl sulfide -	0.40	00.07			
	HAP/VOC	0.49	60.07			
1	Chlorobenzene -	0.25	110.56			
1	HAP/VOC	1.3	112.56 86.47			
	Chlorodifluoromethane Chloroethane (ethyl	1.3	00.47			
	chloride) - HAP/VOC	1.3	64.52			
	Chloroform - HAP/VOC	0.03	119.39			
1	Chloromethane - VOC	1.2	50.49			
1	Chilorometriane - VOC	1.2	30.49			
	Dichlorobenzene - (HAP					
1	for para isomer/VOC)	0.21	147			
1		U.Z I	141			
	Dichlorodifluoromethane	16	120.91			
	Dichlorofluoromethane -	10	120.91			
	VOC	2.6	102.92			
	Dichloromethane	2.0	102.32			
	(methylene chloride) -					
	(Methylene chiloride) -	14	84.94			
	Dimethyl sulfide (methyl	14	04.94			
	sulfide) - VOC	7.8	62.13			
1	Ethane	7.8 890	30.07			
1	Ethanol - VOC	27	46.08			
	Edianoi - VOO	41	40.00	<u> </u>	1	


## **Pollutant Parameters (Continued)**


Gas / Pollutant Default Parameters:				User-sp	ecified Pol	lutant Parameters:

	Gas / Pol	lutant Default Paran	User-specified Pollutant Parameters:		
	Compound	Concentration (ppmv)	Molecular Weight	Concentration (ppmv)	Molecular Weight
	Ethyl mercaptan (ethanethiol) - VOC	2.3	62.13	, , , , , , , , , , , , , , , , , , ,	J
	Ethylbenzene -				
	HAP/VOC Ethylene dibromide -	4.6	106.16		
	HAP/VOC	1.0E-03	187.88		
	Fluorotrichloromethane - VOC	0.76	137.38		
	Hexane - HAP/VOC	6.6	86.18		
	Hydrogen sulfide Mercury (total) - HAP	36	34.08		
	Methyl ethyl ketone -	2.9E-04	200.61		
	HAP/VOC	7.1	72.11		
	Methyl isobutyl ketone - HAP/VOC	1.9	100.16		
	Methyl mercaptan - VOC	2.5	48.11		
	Pentane - VOC	3.3	72.15		
	Perchloroethylene				
	(tetrachloroethylene) - HAP	3.7	165.00		
	Propane - VOC	3.7 11	165.83 44.09		
	t-1,2-Dichloroethene -				
	VOC Toluene - No or	2.8	96.94		
	Unknown Co-disposal -				
	HAP/VOC	39	92.13		
	Toluene - Co-disposal - HAP/VOC	170	92.13		
nts	Trichloroethylene (trichloroethene) - HAP/VOC	2.8	131.40		
Pollutants	Vinyl chloride - HAP/VOC Xylenes - HAP/VOC	7.3 12	62.50 106.16		

#### **Graphs**

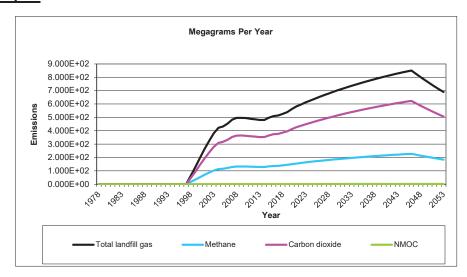

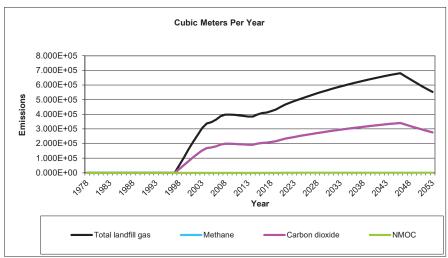

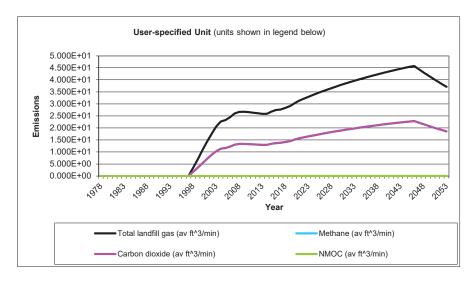

## Results

Yoar Total landfill gas			Methane			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
1978	0	0	0	0	0	0
1979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1998	6.276E+01	5.025E+04	3.377E+00	1.676E+01	2.513E+04	1.688E+00
1999	1.285E+02	1.029E+05	6.915E+00	3.433E+01	5.146E+04	3.458E+00
2000	1.982E+02	1.587E+05	1.066E+01	5.294E+01	7.936E+04	5.332E+00
2001	2.629E+02	2.105E+05	1.414E+01	7.022E+01	1.053E+05	7.072E+00
2002	3.236E+02	2.591E+05	1.741E+01	8.643E+01	1.296E+05	8.705E+00
2003	3.816E+02	3.056E+05	2.053E+01	1.019E+02	1.528E+05	1.027E+01
2004	4.218E+02	3.378E+05	2.270E+01	1.127E+02	1.689E+05	1.135E+01
2005	4.319E+02	3.459E+05	2.324E+01	1.154E+02	1.729E+05	1.162E+01
2006	4.535E+02	3.632E+05	2.440E+01	1.211E+02	1.816E+05	1.220E+01
2007	4.834E+02	3.871E+05	2.601E+01	1.291E+02	1.935E+05	1.300E+01
2008	4.961E+02	3.972E+05	2.669E+01	1.325E+02	1.986E+05	1.335E+01
2009	4.966E+02	3.977E+05	2.672E+01	1.327E+02	1.988E+05	1.336E+01
2010	4.945E+02	3.960E+05	2.660E+01	1.321E+02	1.980E+05	1.330E+01
2011	4.891E+02	3.917E+05	2.632E+01	1.307E+02	1.958E+05	1.316E+01
2012	4.855E+02	3.888E+05	2.612E+01	1.297E+02	1.944E+05	1.306E+01
2013	4.806E+02	3.848E+05	2.586E+01	1.284E+02	1.924E+05	1.293E+01
2014	4.804E+02	3.847E+05	2.585E+01	1.283E+02	1.923E+05	1.292E+01
2015	4.978E+02	3.986E+05	2.678E+01	1.330E+02	1.993E+05	1.339E+01
2016	5.100E+02	4.084E+05	2.744E+01	1.362E+02	2.042E+05	1.372E+01
2017	5.139E+02	4.115E+05	2.765E+01	1.373E+02	2.058E+05	1.382E+01
2018	5.266E+02	4.217E+05	2.833E+01	1.407E+02	2.109E+05	1.417E+01
2019	5.396E+02	4.321E+05	2.903E+01	1.441E+02	2.160E+05	1.452E+01
2020	5.623E+02	4.503E+05	3.025E+01	1.502E+02	2.251E+05	1.513E+01
2021	5.823E+02	4.663E+05	3.133E+01	1.555E+02	2.331E+05	1.566E+01
2022	5.973E+02	4.783E+05	3.214E+01	1.596E+02	2.392E+05	1.607E+01
2023	6.119E+02	4.900E+05	3.292E+01	1.635E+02	2.450E+05	1.646E+01
2024	6.261E+02	5.014E+05	3.369E+01	1.672E+02	2.507E+05	1.684E+01
2025	6.399E+02	5.124E+05	3.443E+01	1.709E+02	2.562E+05	1.721E+01
2026	6.532E+02	5.231E+05	3.514E+01	1.745E+02	2.615E+05	1.757E+01
2027	6.662E+02	5.334E+05	3.584E+01	1.779E+02	2.667E+05	1.792E+01

		Total landfill gas		Methane			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2028	6.787E+02	5.435E+05	3.652E+01	1.813E+02	2.717E+05	1.826E+01	
2029	6.909E+02	5.533E+05	3.717E+01	1.846E+02	2.766E+05	1.859E+01	
2030	7.028E+02	5.627E+05	3.781E+01	1.877E+02	2.814E+05	1.891E+01	
2031	7.143E+02	5.719E+05	3.843E+01	1.908E+02	2.860E+05	1.921E+01	
2032	7.254E+02	5.809E+05	3.903E+01	1.938E+02	2.904E+05	1.951E+01	
2033	7.362E+02	5.895E+05	3.961E+01	1.967E+02	2.948E+05	1.981E+01	
2034	7.467E+02	5.979E+05	4.018E+01	1.995E+02	2.990E+05	2.009E+01	
2035	7.569E+02	6.061E+05	4.072E+01	2.022E+02	3.031E+05	2.036E+01	
2036	7.668E+02	6.140E+05	4.126E+01	2.048E+02	3.070E+05	2.063E+01	
2037	7.764E+02	6.217E+05	4.177E+01	2.074E+02	3.109E+05	2.089E+01	
2038	7.857E+02	6.292E+05	4.227E+01	2.099E+02	3.146E+05	2.114E+01	
2039	7.948E+02	6.364E+05	4.276E+01	2.123E+02	3.182E+05	2.138E+01	
2040	8.035E+02	6.434E+05	4.323E+01	2.146E+02	3.217E+05	2.162E+01	
2041	8.120E+02	6.502E+05	4.369E+01	2.169E+02	3.251E+05	2.184E+01	
2042	8.203E+02	6.569E+05	4.413E+01	2.191E+02	3.284E+05	2.207E+01	
2043	8.283E+02	6.633E+05	4.457E+01	2.213E+02	3.316E+05	2.228E+01	
2044	8.361E+02	6.695E+05	4.498E+01	2.233E+02	3.348E+05	2.249E+01	
2045	8.436E+02	6.755E+05	4.539E+01	2.253E+02	3.378E+05	2.270E+01	
2046	8.510E+02	6.814E+05	4.578E+01	2.273E+02	3.407E+05	2.289E+01	
2047	8.258E+02	6.613E+05	4.443E+01	2.206E+02	3.306E+05	2.222E+01	
2048	8.014E+02	6.417E+05	4.312E+01	2.141E+02	3.209E+05	2.156E+01	
2049	7.777E+02	6.228E+05	4.184E+01	2.077E+02	3.114E+05	2.092E+01	
2050	7.547E+02	6.044E+05	4.061E+01	2.016E+02	3.022E+05	2.030E+01	
2051	7.324E+02	5.865E+05	3.941E+01	1.956E+02	2.933E+05	1.970E+01	
2052	7.108E+02	5.692E+05	3.824E+01	1.899E+02	2.846E+05	1.912E+01	
2053	6.898E+02	5.523E+05	3.711E+01	1.842E+02	2.762E+05	1.856E+01	
2054	6.694E+02	5.360E+05	3.602E+01	1.788E+02	2.680E+05	1.801E+01	
2055	6.496E+02	5.202E+05	3.495E+01	1.735E+02	2.601E+05	1.748E+01	
2056	6.304E+02	5.048E+05	3.392E+01	1.684E+02	2.524E+05	1.696E+01	
2057	6.118E+02	4.899E+05	3.292E+01	1.634E+02	2.449E+05	1.646E+01	
2058	5.937E+02	4.754E+05	3.194E+01	1.586E+02	2.377E+05	1.597E+01	
2059	5.762E+02	4.614E+05	3.100E+01	1.539E+02	2.307E+05	1.550E+01	
2060	5.591E+02	4.477E+05	3.008E+01	1.493E+02	2.239E+05	1.504E+01	
2061	5.426E+02	4.345E+05	2.919E+01	1.449E+02	2.239E+05 2.172E+05	1.460E+01	
2062	5.266E+02	4.216E+05	2.833E+01	1.407E+02	2.108E+05	1.417E+01	
2063	5.110E+02	4.092E+05	2.749E+01	1.365E+02	2.046E+05	1.375E+01	
2064	4.959E+02	3.971E+05	2.668E+01	1.325E+02	1.985E+05	1.334E+01	
2065	4.812E+02	3.854E+05	2.589E+01	1.285E+02	1.927E+05	1.295E+01	
2066	4.670E+02	3.740E+05	2.513E+01	1.247E+02	1.870E+05	1.256E+01	
2067	4.532E+02	3.629E+05	2.438E+01	1.211E+02	1.815E+05	1.219E+01	
2068	4.398E+02	3.522E+05	2.366E+01	1.175E+02	1.761E+05	1.183E+01	
2069	4.268E+02	3.418E+05	2.296E+01	1.140E+02	1.701E+05	1.148E+01	
2070	4.266E+02 4.142E+02	3.416E+05 3.317E+05	2.296E+01 2.229E+01	1.140E+02 1.106E+02	1.658E+05	1.146E+01 1.114E+01	
2070	4.142E+02 4.020E+02	3.219E+05	2.229E+01 2.163E+01	1.106E+02 1.074E+02	1.609E+05	1.081E+01	
2071	3.901E+02	3.124E+05	2.103E+01 2.099E+01	1.042E+02	1.562E+05	1.061E+01 1.049E+01	
2072	3.786E+02	3.031E+05	2.099E+01 2.037E+01	1.042E+02 1.011E+02	1.516E+05	1.049E+01	
2073							
2074	3.674E+02 3.565E+02	2.942E+05 2.855E+05	1.977E+01 1.918E+01	9.813E+01 9.523E+01	1.471E+05 1.427E+05	9.883E+00 9.591E+00	
		2.655E+05 2.770E+05		9.523E+01 9.241E+01		9.391E+00 9.307E+00	
2076	3.460E+02		1.861E+01		1.385E+05		
2077	3.358E+02	2.689E+05	1.806E+01	8.968E+01	1.344E+05	9.032E+00	
2078	3.258E+02	2.609E+05	1.753E+01	8.703E+01	1.305E+05	8.765E+00	

Year		Total landfill gas			Methane		
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2079	3.162E+02	2.532E+05	1.701E+01	8.446E+01	1.266E+05	8.506E+00	
2080	3.069E+02	2.457E+05	1.651E+01	8.196E+01	1.229E+05	8.255E+00	
2081	2.978E+02	2.385E+05	1.602E+01	7.954E+01	1.192E+05	8.011E+00	
2082	2.890E+02	2.314E+05	1.555E+01	7.719E+01	1.157E+05	7.774E+00	
2083	2.804E+02	2.246E+05	1.509E+01	7.491E+01	1.123E+05	7.544E+00	
2084	2.722E+02	2.179E+05	1.464E+01	7.270E+01	1.090E+05	7.321E+00	
2085	2.641E+02	2.115E+05	1.421E+01	7.055E+01	1.057E+05	7.105E+00	
2086	2.563E+02	2.052E+05	1.379E+01	6.846E+01	1.026E+05	6.895E+00	
2087	2.487E+02	1.992E+05	1.338E+01	6.644E+01	9.959E+04	6.691E+00	
2088	2.414E+02	1.933E+05	1.299E+01	6.448E+01	9.664E+04	6.493E+00	
2089	2.342E+02	1.876E+05	1.260E+01	6.257E+01	9.379E+04	6.302E+00	
2090	2.273E+02	1.820E+05	1.223E+01	6.072E+01	9.102E+04	6.115E+00	
2091	2.206E+02	1.767E+05	1.187E+01	5.893E+01	8.833E+04	5.935E+00	
2092	2.141E+02	1.714E+05	1.152E+01	5.718E+01	8.571E+04	5.759E+00	
2093	2.078E+02	1.664E+05	1.118E+01	5.549E+01	8.318E+04	5.589E+00	
2094	2.016E+02	1.614E+05	1.085E+01	5.385E+01	8.072E+04	5.424E+00	
095	1.957E+02	1.567E+05	1.053E+01	5.226E+01	7.834E+04	5.263E+00	
096	1.899E+02	1.520E+05	1.022E+01	5.072E+01	7.602E+04	5.108E+00	
097	1.843E+02	1.476E+05	9.914E+00	4.922E+01	7.378E+04	4.957E+00	
098	1.788E+02	1.432E+05	9.621E+00	4.776E+01	7.160E+04	4.810E+00	
2099	1.735E+02	1.390E+05	9.337E+00	4.635E+01	6.948E+04	4.668E+00	
2100	1.684E+02	1.349E+05	9.061E+00	4.498E+01	6.743E+04	4.530E+00	
2101	1.634E+02	1.309E+05	8.793E+00	4.365E+01	6.543E+04	4.396E+00	
102	1.586E+02	1.270E+05	8.533E+00	4.236E+01	6.350E+04	4.266E+00	
2103	1.539E+02	1.232E+05	8.281E+00	4.111E+01	6.162E+04	4.140E+00	
104	1.494E+02	1.196E+05	8.036E+00	3.990E+01	5.980E+04	4.018E+00	
105	1.449E+02	1.161E+05	7.799E+00	3.872E+01	5.803E+04	3.899E+00	
106	1.407E+02	1.126E+05	7.568E+00	3.757E+01	5.632E+04	3.784E+00	
107	1.365E+02	1.093E+05	7.344E+00	3.646E+01	5.465E+04	3.672E+00	
108	1.325E+02	1.061E+05	7.127E+00	3.538E+01	5.304E+04	3.564E+00	
2109	1.286E+02	1.029E+05	6.917E+00	3.434E+01	5.147E+04	3.458E+00	
110	1.248E+02	9.990E+04	6.712E+00	3.332E+01	4.995E+04	3.356E+00	
111	1.211E+02	9.695E+04	6.514E+00	3.234E+01	4.847E+04	3.257E+00	
2112	1.175E+02	9.408E+04	6.321E+00	3.138E+01	4.704E+04	3.161E+00	
2113	1.140E+02	9.130E+04	6.135E+00	3.046E+01	4.565E+04	3.067E+00	
2114	1.107E+02	8.860E+04	5.953E+00	2.956E+01	4.430E+04	2.977E+00	
2115	1.074E+02	8.598E+04	5.777E+00	2.868E+01	4.299E+04	2.889E+00	
2116	1.042E+02	8.344E+04	5.607E+00	2.783E+01	4.172E+04	2.803E+00	
2117	1.011E+02	8.098E+04	5.441E+00	2.701E+01	4.049E+04	2.720E+00	
2118	9.814E+01	7.858E+04	5.280E+00	2.621E+01	3.929E+04	2.640E+00	

Year		Carbon dioxide		NMOC		
	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
1978	0	0	0	0	Ö	0
1979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
1998	4.599E+01	2.513E+04	1.688E+00	1.081E-01	3.015E+01	2.026E-03
1999	9.420E+01	5.146E+04	3.458E+00	2.213E-01	6.175E+01	4.149E-03
2000	1.453E+02	7.936E+04	5.332E+00	3.414E-01	9.523E+01	6.399E-03
2001	1.927E+02	1.053E+05	7.072E+00	4.527E-01	1.263E+02	8.486E-03
2002	2.371E+02	1.296E+05	8.705E+00	5.573E-01	1.555E+02	1.045E-02
2003	2.797E+02	1.528E+05	1.027E+01	6.572E-01	1.833E+02	1.232E-02
2004	3.092E+02	1.689E+05	1.135E+01	7.265E-01	2.027E+02	1.362E-02
2005	3.165E+02	1.729E+05	1.162E+01	7.438E-01	2.075E+02	1.394E-02
2006	3.324E+02	1.816E+05	1.220E+01	7.810E-01	2.179E+02	1.464E-02
2007	3.543E+02	1.935E+05	1.300E+01	8.325E-01	2.322E+02	1.560E-02
2008	3.636E+02	1.986E+05	1.335E+01	8.543E-01	2.383E+02	1.601E-02
2009	3.640E+02	1.988E+05	1.336E+01	8.553E-01	2.386E+02	1.603E-02
2010	3.624E+02	1.980E+05	1.330E+01	8.516E-01	2.376E+02	1.596E-02
2011	3.585E+02	1.958E+05	1.316E+01	8.424E-01	2.350E+02	1.579E-02
2012	3.559E+02	1.944E+05	1.306E+01	8.362E-01	2.333E+02	1.567E-02
2013	3.522E+02	1.924E+05	1.293E+01	8.276E-01	2.309E+02	1.551E-02
2014	3.521E+02	1.923E+05	1.292E+01	8.273E-01	2.308E+02	1.551E-02
2015	3.648E+02	1.993E+05	1.339E+01	8.573E-01	2.392E+02	1.607E-02
2016	3.738E+02	2.042E+05	1.372E+01	8.783E-01	2.450E+02	1.646E-02
2017	3.766E+02	2.058E+05	1.382E+01	8.850E-01	2.469E+02	1.659E-02
2018	3.860E+02	2.109E+05	1.417E+01	9.070E-01	2.530E+02	1.700E-02
2019	3.955E+02	2.160E+05	1.452E+01	9.293E-01	2.593E+02	1.742E-02
2020	4.121E+02	2.251E+05	1.513E+01	9.684E-01	2.702E+02	1.815E-02
2021	4.267E+02	2.331E+05	1.566E+01	1.003E+00	2.798E+02	1.880E-02
2022	4.378E+02	2.392E+05	1.607E+01	1.029E+00	2.870E+02	1.928E-02
2023	4.485E+02	2.450E+05	1.646E+01	1.054E+00	2.940E+02	1.975E-02
2024	4.589E+02	2.507E+05	1.684E+01	1.078E+00	3.008E+02	2.021E-02
2025	4.689E+02	2.562E+05	1.721E+01	1.102E+00	3.074E+02	2.066E-02
2026	4.787E+02	2.615E+05	1.757E+01	1.125E+00	3.138E+02	2.109E-02
2027	4.882E+02	2.667E+05	1.792E+01	1.147E+00	3.201E+02	2.150E-02

Voc	Year Carbon dioxide			NMOC			
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2028	4.974E+02	2.717E+05	1.826E+01	1.169E+00	3.261E+02	2.191E-02	
2029	5.064E+02	2.766E+05	1.859E+01	1.190E+00	3.320E+02	2.230E-02	
2030	5.151E+02	2.814E+05	1.891E+01	1.210E+00	3.376E+02	2.269E-02	
2031	5.235E+02	2.860E+05	1.921E+01	1.230E+00	3.432E+02	2.306E-02	
2032	5.316E+02	2.904E+05	1.951E+01	1.249E+00	3.485E+02	2.342E-02	
2033	5.396E+02	2.948E+05	1.981E+01	1.268E+00	3.537E+02	2.377E-02	
2034	5.473E+02	2.990E+05	2.009E+01	1.286E+00	3.588E+02	2.411E-02	
2035	5.547E+02	3.031E+05	2.036E+01	1.304E+00	3.637E+02	2.443E-02	
2036	5.620E+02	3.070E+05	2.063E+01	1.321E+00	3.684E+02	2.475E-02	
2037	5.690E+02	3.109E+05	2.089E+01	1.337E+00	3.730E+02	2.506E-02	
2038	5.758E+02	3.146E+05	2.114E+01	1.353E+00	3.775E+02	2.536E-02	
2039	5.825E+02	3.182E+05	2.138E+01	1.369E+00	3.818E+02	2.566E-02	
2040	5.889E+02	3.217E+05	2.162E+01	1.384E+00	3.861E+02	2.594E-02	
2041	5.951E+02	3.251E+05	2.184E+01	1.398E+00	3.901E+02	2.621E-02	
2042	6.012E+02	3.284E+05	2.207E+01	1.413E+00	3.941E+02	2.648E-02	
2043	6.071E+02	3.316E+05	2.228E+01	1.426E+00	3.980E+02	2.674E-02	
2044	6.128E+02	3.348E+05	2.249E+01	1.440E+00	4.017E+02	2.699E-02	
2045	6.183E+02	3.378E+05	2.270E+01	1.453E+00	4.053E+02	2.723E-02	
2046	6.237E+02	3.407E+05	2.289E+01	1.466E+00	4.088E+02	2.747E-02	
2047	6.052E+02	3.306E+05	2.222E+01	1.422E+00	3.968E+02	2.666E-02	
2048	5.873E+02	3.209E+05	2.156E+01	1.380E+00	3.850E+02	2.587E-02	
2049	5.700E+02	3.114E+05	2.092E+01	1.339E+00	3.737E+02	2.511E-02	
2050	5.531E+02	3.022E+05	2.030E+01	1.300E+00	3.626E+02	2.436E-02	
2051	5.368E+02	2.933E+05	1.970E+01	1.261E+00	3.519E+02	2.364E-02	
2052	5.209E+02	2.846E+05	1.912E+01	1.224E+00	3.415E+02	2.295E-02	
2053	5.055E+02	2.762E+05	1.856E+01	1.188E+00	3.314E+02	2.227E-02	
2054	4.906E+02	2.680E+05	1.801E+01	1.153E+00	3.216E+02	2.161E-02	
2055	4.761E+02	2.601E+05	1.748E+01	1.119E+00	3.121E+02	2.097E-02	
2056	4.620E+02	2.524E+05	1.696E+01	1.086E+00	3.029E+02	2.035E-02	
2057	4.484E+02	2.449E+05	1.646E+01	1.054E+00	2.939E+02	1.975E-02	
2058	4.351E+02	2.377E+05	1.597E+01	1.022E+00	2.852E+02	1.917E-02	
2059	4.223E+02	2.307E+05	1.550E+01	9.922E-01	2.768E+02	1.860E-02	
2060	4.098E+02	2.239E+05	1.504E+01	9.629E-01	2.686E+02	1.805E-02	
2061	3.977E+02	2.172E+05	1.460E+01	9.344E-01	2.607E+02	1.752E-02	
2062	3.859E+02	2.108E+05	1.417E+01	9.068E-01	2.530E+02	1.700E-02	
2063	3.745E+02	2.046E+05	1.375E+01	8.800E-01	2.455E+02	1.650E-02	
2064	3.634E+02	1.985E+05	1.334E+01	8.540E-01	2.383E+02	1.601E-02	
2065	3.527E+02	1.927E+05	1.295E+01	8.288E-01	2.312E+02	1.554E-02	
2066	3.423E+02	1.870E+05	1.256E+01	8.043E-01	2.244E+02	1.508E-02	
2067	3.322E+02	1.815E+05	1.219E+01	7.805E-01	2.177E+02	1.463E-02	
2068	3.223E+02	1.761E+05	1.183E+01	7.574E-01	2.113E+02	1.420E-02	
2069	3.128E+02	1.709E+05	1.148E+01	7.351E-01	2.051E+02	1.378E-02	
2070	3.036E+02	1.658E+05	1.114E+01	7.133E-01	1.990E+02	1.337E-02	
2071	2.946E+02	1.609E+05	1.081E+01	6.923E-01	1.931E+02	1.298E-02	
2072	2.859E+02	1.562E+05	1.049E+01	6.718E-01	1.874E+02	1.259E-02	
2073	2.774E+02	1.516E+05	1.018E+01	6.519E-01	1.819E+02	1.222E-02	
2074	2.692E+02	1.471E+05	9.883E+00	6.327E-01	1.765E+02	1.186E-02	
2075	2.613E+02	1.427E+05	9.591E+00	6.140E-01	1.713E+02	1.151E-02	
2076	2.536E+02	1.385E+05	9.307E+00	5.958E-01	1.662E+02	1.117E-02	
2077	2.461E+02	1.344E+05	9.032E+00	5.782E-01	1.613E+02	1.084E-02	
2078	2.388E+02	1.305E+05	8.765E+00	5.611E-01	1.565E+02	1.052E-02	

Vaar	Carbon dioxide			NMOC		
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)
2079	2.317E+02	1.266E+05	8.506E+00	5.445E-01	1.519E+02	1.021E-02
2080	2.249E+02	1.229E+05	8.255E+00	5.285E-01	1.474E+02	9.906E-03
2081	2.182E+02	1.192E+05	8.011E+00	5.128E-01	1.431E+02	9.613E-03
2082	2.118E+02	1.157E+05	7.774E+00	4.977E-01	1.388E+02	9.329E-03
2083	2.055E+02	1.123E+05	7.544E+00	4.830E-01	1.347E+02	9.053E-03
2084	1.995E+02	1.090E+05	7.321E+00	4.687E-01	1.308E+02	8.786E-03
2085	1.936E+02	1.057E+05	7.105E+00	4.548E-01	1.269E+02	8.526E-03
2086	1.878E+02	1.026E+05	6.895E+00	4.414E-01	1.231E+02	8.274E-03
2087	1.823E+02	9.959E+04	6.691E+00	4.284E-01	1.195E+02	8.029E-03
2088	1.769E+02	9.664E+04	6.493E+00	4.157E-01	1.160E+02	7.792E-03
2089	1.717E+02	9.379E+04	6.302E+00	4.034E-01	1.125E+02	7.562E-03
2090	1.666E+02	9.102E+04	6.115E+00	3.915E-01	1.092E+02	7.338E-03
2091	1.617E+02	8.833E+04	5.935E+00	3.799E-01	1.060E+02	7.121E-03
2092	1.569E+02	8.571E+04	5.759E+00	3.687E-01	1.029E+02	6.911E-03
2093	1.523E+02	8.318E+04	5.589E+00	3.578E-01	9.982E+01	6.707E-03
2094	1.478E+02	8.072E+04	5.424E+00	3.472E-01	9.687E+01	6.509E-03
2095	1.434E+02	7.834E+04	5.263E+00	3.370E-01	9.400E+01	6.316E-03
2096	1.392E+02	7.602E+04	5.108E+00	3.270E-01	9.123E+01	6.130E-03
2097	1.350E+02	7.378E+04	4.957E+00	3.173E-01	8.853E+01	5.948E-03
2098	1.311E+02	7.160E+04	4.810E+00	3.080E-01	8.591E+01	5.773E-03
2099	1.272E+02	6.948E+04	4.668E+00	2.989E-01	8.337E+01	5.602E-03
2100	1.234E+02	6.743E+04	4.530E+00	2.900E-01	8.091E+01	5.436E-03
2101	1.198E+02	6.543E+04	4.396E+00	2.815E-01	7.852E+01	5.276E-03
2102	1.162E+02	6.350E+04	4.266E+00	2.731E-01	7.620E+01	5.120E-03
2103	1.128E+02	6.162E+04	4.140E+00	2.651E-01	7.395E+01	4.968E-03
2104	1.095E+02	5.980E+04	4.018E+00	2.572E-01	7.176E+01	4.822E-03
2105	1.062E+02	5.803E+04	3.899E+00	2.496E-01	6.964E+01	4.679E-03
2106	1.031E+02	5.632E+04	3.784E+00	2.422E-01	6.758E+01	4.541E-03
2107	1.000E+02	5.465E+04	3.672E+00	2.351E-01	6.559E+01	4.407E-03
2108	9.709E+01	5.304E+04	3.564E+00	2.281E-01	6.365E+01	4.276E-03
2109	9.422E+01	5.147E+04	3.458E+00	2.214E-01	6.177E+01	4.150E-03
2110	9.143E+01	4.995E+04	3.356E+00	2.149E-01	5.994E+01	4.027E-03
2111	8.873E+01	4.847E+04	3.257E+00	2.085E-01	5.817E+01	3.908E-03
2112	8.611E+01	4.704E+04	3.161E+00	2.023E-01	5.645E+01	3.793E-03
2113	8.356E+01	4.565E+04	3.067E+00	1.964E-01	5.478E+01	3.681E-03
2114	8.109E+01	4.430E+04	2.977E+00	1.906E-01	5.316E+01	3.572E-03
2115	7.870E+01	4.299E+04	2.889E+00	1.849E-01	5.159E+01	3.466E-03
2116	7.637E+01	4.172E+04	2.803E+00	1.795E-01	5.007E+01	3.364E-03
2117	7.411E+01	4.049E+04	2.720E+00	1.742E-01	4.859E+01	3.265E-03
2118	7.192E+01	3.929E+04	2.640E+00	1.690E-01	4.715E+01	3.168E-03

MSW waste LandGEM 2021 5/10/2021



# **Summary Report**

Landfill Name or Identifier: MSW CB Landfill Model

Date: Monday, May 10, 2021

**Description/Comments:** 

#### **About LandGEM:**

First-Order Decomposition Rate Equation:

 $Q_{CH_4} = \sum_{i=1}^{n} \sum_{j=0,1}^{1} k L_o \left(\frac{M_i}{10}\right) e^{-kt_{ij}}$ 

Where

 $Q_{CH4}$  = annual methane generation in the year of the calculation ( $m^3/year$ )

i = 1-year time increment

n = (year of the calculation) - (initial year of waste acceptance)

j = 0.1-year time increment

 $k = methane generation rate (year^{-1})$ 

 $L_o$  = potential methane generation capacity  $(m^3/Mg)$ 

 $M_i$  = mass of waste accepted in the  $i^{th}$  year (Mg)  $t_{ij}$  = age of the  $j^{th}$  section of waste mass  $M_i$  accepted in the  $i^{th}$  year ( $decimal\ years$ , e.g., 3.2 years)

LandGEM is based on a first-order decomposition rate equation for quantifying emissions from the decomposition of landfilled waste in municipal solid waste (MSW) landfills. The software provides a relatively simple approach to estimating landfill gas emissions. Model defaults are based on empirical data from U.S. landfills. Field test data can also be used in place of model defaults when available. Further guidance on EPA test methods, Clean Air Act (CAA) regulations, and other guidance regarding landfill gas emissions and control technology requirements can be found at http://www.epa.gov/ttnatw01/landfill/landfilpg.html.

LandGEM is considered a screening tool — the better the input data, the better the estimates. Often, there are limitations with the available data regarding waste quantity and composition, variation in design and operating practices over time, and changes occurring over time that impact the emissions potential. Changes to landfill operation, such as operating under wet conditions through leachate recirculation or other liquid additions, will result in generating more gas at a faster rate. Defaults for estimating emissions for this type of operation are being developed to include in LandGEM along with defaults for convential landfills (no leachate or liquid additions) for developing emission inventories and determining CAA applicability. Refer to the Web site identified above for future updates.

MSW waste LandGEM\_2021 5/10/2021

#### **Input Review**

LANDFILL CHARACTERISTICS

Landfill Open Year1978Landfill Closure Year (with 80-year limit)2045Actual Closure Year (without limit)2045Have Model Calculate Closure Year?No

Waste Design Capacity megagrams

MODEL PARAMETERS

Methane Generation Rate, k 0.040  $year^{-1}$  Potential Methane Generation Capacity, L<sub>o</sub> 110  $m^3/Mg$ 

NMOC Concentration600ppmv as hexaneMethane Content50% by volume

GASES / POLLUTANTS SELECTED

Gas / Pollutant #1: Total landfill gas
Gas / Pollutant #2: Methane
Gas / Pollutant #3: Carbon dioxide
Gas / Pollutant #4: NMOC

#### WASTE ACCEPTANCE RATES

	Waste Ac		Waste-I	Waste-In-Place		
Year	(Mg/year)	(short tons/year)	(Mg)	(short tons)		
1978	0	0	0	0		
1979	0	0	0	0		
1980	0	0	0	0		
1981	0	0	0	0		
1982	0	0	0	0		
1983	0	0	0	0		
1984	0	0	0	0		
1985	0	0	0	0		
1986	0	0	0	0		
1987	0	0	0	0		
1988	0	0	0	0		
1989	0	0	0	0		
1990	0	0	0	0		
1991	0	0	0	0		
1992	0	0	0	0		
1993	0	0	0	0		
1994	0	0	0	0		
1995	0	0	0	0		
1996	0	0	0	0		
1997	241,684	265,852	0	0		
1998	257,632	283,395	241,684	265,852		
1999	272,325	299,558	499,315	549,247		
2000	256,927	282,620	771,641	848,805		
2001	270,794	297,873	1,028,568	1,131,425		
2002	279,144	307,058	1,299,362	1,429,298		
2003	228,960	251,856	1,578,505	1,736,356		
2004	380,068	418,075	1,807,465	1,988,212		
2005	384,370	422,807	2,187,534	2,406,287		
2006	408,215	449,037	2,571,904	2,829,095		
2007	379,773	417,751	2,980,120	3,278,132		
2008	332,140	365,354	3,359,893	3,695,882		
2009	283,487	311,836	3,692,033	4,061,236		
2010	277,094	304,803	3,975,520	4,373,072		
2011	292,743	322,017	4,252,614	4,677,875		
2012	302,796	333,075	4,545,357	4,999,893		
2013	279,005	306,905	4,848,153	5,332,968		
2014	307,494	338,243	5,127,157	5,639,873		
2015	345,213	379,734	5,434,651	5,978,116		
2016	380,642	418,706	5,779,863	6,357,850		
2017	666,969	733,666	6,160,505	6,776,556		

#### NASTE ACCEPTANCE RATES (Continued)

WASTE A	ACCEPTANCE RATES	(Continued)			
Year	Waste Acc	epted	Waste-In-Place		
I eai	(Mg/year)	(short tons/year)	(Mg)	(short tons)	
2018	709,929	780,922	6,827,474	7,510,222	
2019	697,614	767,375	7,537,403		
2020	547,133	601,847	8,235,017	9,058,519	
2021	512,727	564,000	8,782,150	9,660,365	
2022	512,727	564,000	9,294,877	10,224,365	
2023	512,727	564,000	9,807,605	10,788,365	
2024	512,727	564,000	10,320,332	11,352,365	
2025	512,727	564,000	10,833,059	11,916,365	
2026	512,727	564,000	11,345,787	12,480,365	
2027	512,727	564,000	11,858,514	13,044,365	
2028	512,727	564,000	12,371,241	13,608,365	
2029	512,727	564,000	12,883,968	14,172,365	
2030	512,727	564,000	13,396,696	14,736,365	
2031	512,727	564,000	13,909,423	15,300,365	
2032	512,727	564,000	14,422,150	15,864,365	
2033	512,727	564,000	14,934,877	16,428,365	
2034	512,727	564,000	15,447,605	16,992,365	
2035	512,727	564,000	15,960,332	17,556,365	
2036	512,727	564,000	16,473,059	18,120,365	
2037	512,727	564,000	16,985,787	18,684,365	
2038	512,727	564,000	17,498,514	19,248,365	
2039	512,727	564,000	18,011,241	19,812,365	
2040	512,727	564,000	18,523,968	20,376,365	
2041	512,727	564,000	19,036,696	20,940,365	
2042	512,727	564,000	19,549,423	21,504,365	
2043	512,727	564,000	20,062,150	22,068,365	
2044	512,727	564,000	20,574,877	22,632,365	
2045	512,727	564,000	21,087,605	23,196,365	
2046	0	0	21,600,332	23,760,365	
2047	0	0	21,600,332	23,760,365	
2048	0	0	21,600,332	23,760,365	
2049	0	0	21,600,332	23,760,365	
2050	0	0	21,600,332	23,760,365	
2051	0	0	21,600,332	23,760,365	
2052	0	0	21,600,332	23,760,365	
2053	0	0	21,600,332	23,760,365	
2054	0	0	21,600,332	23,760,365	
2055	0	0	21,600,332	23,760,365	
2056	0	0	21,600,332		
2057	0	0	21,600,332	23,760,365	

#### **Pollutant Parameters**

	iutant Parameters				
	Gas / Poll	User-specified Pollutant Parameters:			
	Compound	Concentration (ppmv)	Molecular Weight	Concentration (ppmv)	Molecular Weight
	Total landfill gas	(PP)	0.00	(۳۳)	
Gases	Methane		16.04		
jas	Carbon dioxide		44.01		
_	NMOC	4,000	86.18		
	1,1,1-Trichloroethane (methyl chloroform) -	0.48	133.41		
	1,1,2,2-	U.48	133.41		
	Tetrachloroethane - HAP/VOC 1,1-Dichloroethane	1.1	167.85		
	(ethylidene dichloride) -	2.4	00 07		
	HAP/VOC	2.4	98.97		
	1,1-Dichloroethene (vinylidene chloride) -	0.20	06.04		
	HAP/VOC  1,2-Dichloroethane (ethylono dichlorida)	0.20	96.94		
	(ethylene dichloride) - HAP/VOC	0.41	98.96		
	1,2-Dichloropropane (propylene dichloride) - HAP/VOC	0.18	112.99		
	2-Propanol (isopropyl				
	alcohol) - VOC Acetone	50 7.0	60.11 58.08		
	Acrylonitrile - HAP/VOC	6.3	53.06		
	Benzene - No or Unknown Co-disposal - HAP/VOC	1.9	78.11		
ıts	Benzene - Co-disposal - HAP/VOC	11	78.11		
Pollutants	Bromodichloromethane - VOC	3.1	163.83		
Ъ	Butane - VOC	5.0	58.12		
_	Carbon disulfide -	0.50	70.40		
	HAP/VOC	0.58	76.13		
	Carbon monoxide Carbon tetrachloride -	140	28.01		
	HAP/VOC Carbonyl sulfide - HAP/VOC	4.0E-03 0.49	153.84		
	Chlorobenzene - HAP/VOC	0.49	112.56		
	Chlorodifluoromethane Chloroethane (ethyl	1.3	86.47		
	chloride) - HAP/VOC	1.3	64.52		
	Chloroform - HAP/VOC	0.03	119.39		
	Chloromethane - VOC	1.2	50.49		
	Dichlorobenzene - (HAP				
	for para isomer/VOC)	0.21	147		
	Dichlorodifluoromethane	16	120.91		
	Dichlorofluoromethane - VOC	2.6	102.92		
	Dichloromethane (methylene chloride) -				
	HAP Dimethyl sulfide (methyl	14	84.94		
	sulfide) - VOC	7.8	62.13		
	Ethane	890	30.07		

30.07

46.08

27


Ethane


Ethanol - VOC


#### **Pollutant Parameters (Continued)**

Gas / Pol	lutant Default Paran	neters:	User-specified Po	llutant Parameter	
_	Concentration		Concentration		
Compound	(ppmv)	Molecular Weight	(ppmv)	Molecular Weig	
Ethyl mercaptan					
(ethanethiol) - VOC	2.3	62.13			
Ethylbenzene -					
HAP/VOC	4.6	106.16			
Ethylene dibromide -					
HAP/VOC	1.0E-03	187.88			
Fluorotrichloromethane -					
VOC	0.76	137.38			
Hexane - HAP/VOC	6.6	86.18			
Hydrogen sulfide	36	34.08			
Mercury (total) - HAP	2.9E-04	200.61			
Methyl ethyl ketone -					
HAP/VOC	7.1	72.11			
Methyl isobutyl ketone -					
HAP/VOC	1.9	100.16			
Methyl mercaptan - VOC					
	2.5	48.11			
Pentane - VOC	3.3	72.15			
Perchloroethylene					
(tetrachloroethylene) -					
HAP	3.7	165.83			
Propane - VOC	11	44.09			
t-1,2-Dichloroethene -					
VOC	2.8	96.94			
Toluene - No or					
Unknown Co-disposal -					
HAP/VOC	39	92.13			
Toluene - Co-disposal -					
HAP/VOC	170	92.13			
Trichloroethylene					
(trichloroethene) -					
HAP/VOC	2.8	131.40			
Vinyl chloride -					
HAP/VOC	7.3	62.50			
Xylenes - HAP/VOC	12	106.16			
1				1	

#### **Graphs**

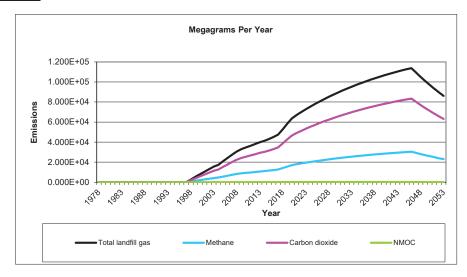

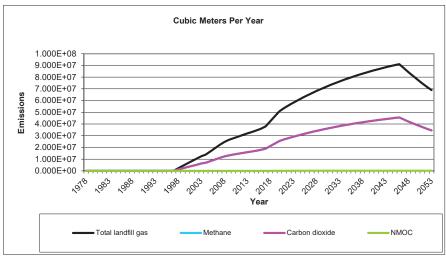

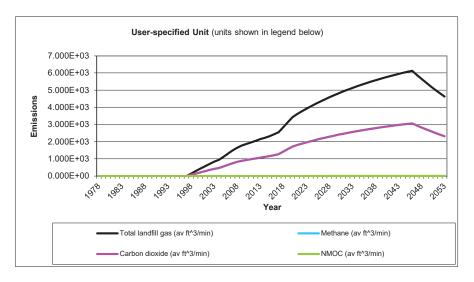

## Results

Vaar		Total landfill gas	Methane				
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
978	0	0	0	0	0	0	
979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
998	2.609E+03	2.089E+06	1.404E+02	6.968E+02	1.045E+06	7.018E+01	
999	5.287E+03	4.234E+06	2.845E+02	1.412E+03	2.117E+06	1.422E+02	
2000	8.020E+03	6.422E+06	4.315E+02	2.142E+03	3.211E+06	2.157E+02	
2001	1.048E+04	8.391E+06	5.638E+02	2.799E+03	4.195E+06	2.819E+02	
2002	1.299E+04	1.040E+07	6.989E+02	3.470E+03	5.201E+06	3.495E+02	
2003	1.549E+04	1.241E+07	8.336E+02	4.139E+03	6.204E+06	4.168E+02	
2004	1.736E+04	1.390E+07	9.339E+02	4.637E+03	6.950E+06	4.670E+02	
2005	2.078E+04	1.664E+07	1.118E+03	5.551E+03	8.320E+06	5.590E+02	
2006	2.411E+04	1.931E+07	1.297E+03	6.441E+03	9.655E+06	6.487E+02	
2007	2.758E+04	2.208E+07	1.484E+03	7.366E+03	1.104E+07	7.418E+02	
2008	3.059E+04	2.450E+07	1.646E+03	8.172E+03	1.225E+07	8.230E+02	
2009	3.298E+04	2.641E+07	1.774E+03	8.809E+03	1.320E+07	8.872E+02	
010	3.475E+04	2.782E+07	1.869E+03	9.281E+03	1.391E+07	9.347E+02	
011	3.637E+04	2.913E+07	1.957E+03	9.716E+03	1.456E+07	9.785E+02	
012	3.811E+04	3.052E+07	2.050E+03	1.018E+04	1.526E+07	1.025E+03	
013	3.988E+04	3.194E+07	2.146E+03	1.065E+04	1.597E+07	1.073E+03	
014	4.133E+04	3.310E+07	2.224E+03	1.104E+04	1.655E+07	1.112E+03	
015	4.303E+04	3.446E+07	2.315E+03	1.149E+04	1.723E+07	1.158E+03	
2016	4.507E+04	3.609E+07	2.425E+03	1.204E+04	1.804E+07	1.212E+03	
017	4.741E+04	3.796E+07	2.551E+03	1.266E+04	1.898E+07	1.275E+03	
2018	5.275E+04	4.224E+07	2.838E+03	1.409E+04	2.112E+07	1.419E+03	
019	5.835E+04	4.672E+07	3.139E+03	1.558E+04	2.336E+07	1.570E+03	
020	6.359E+04	5.092E+07	3.421E+03	1.698E+04	2.546E+07	1.711E+03	
021	6.700E+04	5.365E+07	3.605E+03	1.790E+04	2.683E+07	1.802E+03	
022	6.991E+04	5.598E+07	3.761E+03	1.867E+04	2.799E+07	1.881E+03	
2023	7.270E+04	5.822E+07	3.912E+03	1.942E+04	2.911E+07	1.956E+03	
2024	7.539E+04	6.036E+07	4.056E+03	2.014E+04	3.018E+07	2.028E+03	
2025	7.796E+04	6.243E+07	4.195E+03	2.082E+04	3.121E+07	2.097E+03	
2026	8.044E+04	6.441E+07	4.328E+03	2.149E+04	3.221E+07	2.164E+03	
2027	8.282E+04	6.632E+07	4.456E+03	2.212E+04	3.316E+07	2.228E+03	

Voar		Total landfill gas		Methane			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2028	8.511E+04	6.815E+07	4.579E+03	2.273E+04	3.408E+07	2.290E+03	
2029	8.731E+04	6.991E+07	4.697E+03	2.332E+04	3.496E+07	2.349E+03	
2030	8.942E+04	7.160E+07	4.811E+03	2.388E+04	3.580E+07	2.405E+03	
2031	9.145E+04	7.323E+07	4.920E+03	2.443E+04	3.661E+07	2.460E+03	
2032	9.339E+04	7.479E+07	5.025E+03	2.495E+04	3.739E+07	2.512E+03	
2033	9.527E+04	7.629E+07	5.126E+03	2.545E+04	3.814E+07	2.563E+03	
2034	9.707E+04	7.773E+07	5.222E+03	2.593E+04	3.886E+07	2.611E+03	
035	9.879E+04	7.911E+07	5.315E+03	2.639E+04	3.956E+07	2.658E+03	
036	1.005E+05	8.044E+07	5.405E+03	2.683E+04	4.022E+07	2.702E+03	
2037	1.021E+05	8.172E+07	5.491E+03	2.726E+04	4.086E+07	2.745E+03	
2038	1.036E+05	8.295E+07	5.573E+03	2.767E+04	4.147E+07	2.787E+03	
2039	1.051E+05	8.412E+07	5.652E+03	2.806E+04	4.206E+07	2.826E+03	
040	1.065E+05	8.526E+07	5.728E+03	2.844E+04	4.263E+07	2.864E+03	
041	1.078E+05	8.635E+07	5.802E+03	2.880E+04	4.317E+07	2.901E+03	
042	1.091E+05	8.739E+07	5.872E+03	2.915E+04	4.370E+07	2.936E+03	
043	1.104E+05	8.840E+07	5.939E+03	2.949E+04	4.420E+07	2.970E+03	
044	1.116E+05	8.936E+07	6.004E+03	2.981E+04	4.468E+07	3.002E+03	
045	1.128E+05	9.029E+07	6.067E+03	3.012E+04	4.515E+07	3.033E+03	
046	1.139E+05	9.118E+07	6.127E+03	3.042E+04	4.559E+07	3.063E+03	
2047	1.094E+05	8.761E+07	5.886E+03	2.922E+04	4.380E+07	2.943E+03	
048	1.051E+05	8.417E+07	5.656E+03	2.808E+04	4.209E+07	2.828E+03	
049	1.010E+05	8.087E+07	5.434E+03	2.698E+04	4.044E+07	2.717E+03	
050	9.703E+04	7.770E+07	5.221E+03	2.592E+04	3.885E+07	2.610E+03	
051	9.323E+04	7.465E+07	5.016E+03	2.490E+04	3.733E+07	2.508E+03	
052	8.957E+04	7.173E+07	4.819E+03	2.393E+04	3.586E+07	2.410E+03	
2053	8.606E+04	6.891E+07	4.630E+03	2.299E+04	3.446E+07	2.315E+03	
2054	8.269E+04	6.621E+07	4.449E+03	2.209E+04	3.311E+07	2.224E+03	
2055	7.945E+04	6.362E+07	4.274E+03	2.122E+04	3.181E+07	2.137E+03	
2056	7.633E+04	6.112E+07	4.107E+03	2.039E+04	3.056E+07	2.053E+03	
057	7.334E+04	5.873E+07	3.946E+03	1.959E+04	2.936E+07	1.973E+03	
2058	7.046E+04	5.642E+07	3.791E+03	1.882E+04	2.821E+07	1.896E+03	
2059	6.770E+04	5.421E+07	3.642E+03	1.808E+04	2.711E+07	1.821E+03	
060	6.504E+04	5.208E+07	3.500E+03	1.737E+04	2.604E+07	1.750E+03	
061	6.249E+04	5.004E+07	3.362E+03	1.669E+04	2.502E+07	1.681E+03	
2062	6.004E+04	4.808E+07	3.230E+03	1.604E+04	2.404E+07	1.615E+03	
2063	5.769E+04	4.619E+07	3.104E+03	1.541E+04	2.310E+07	1.552E+03	
064	5.543E+04	4.438E+07	2.982E+03	1.481E+04	2.219E+07	1.491E+03	
065	5.325E+04	4.264E+07	2.865E+03	1.422E+04	2.132E+07	1.433E+03	
2066	5.117E+04	4.097E+07	2.753E+03	1.367E+04	2.049E+07	1.376E+03	
:067	4.916E+04	3.936E+07	2.645E+03	1.313E+04	1.968E+07	1.322E+03	
.068	4.723E+04	3.782E+07	2.541E+03	1.262E+04	1.891E+07	1.271E+03	
069	4.538E+04	3.634E+07	2.442E+03	1.212E+04	1.817E+07	1.221E+03	
070	4.360E+04	3.491E+07	2.346E+03	1.165E+04	1.746E+07	1.173E+03	
2071	4.189E+04	3.354E+07	2.254E+03	1.119E+04	1.677E+07	1.127E+03	
2072	4.025E+04	3.223E+07	2.165E+03	1.075E+04	1.611E+07	1.083E+03	
2073	3.867E+04	3.097E+07	2.081E+03	1.033E+04	1.548E+07	1.040E+03	
074	3.715E+04	2.975E+07	1.999E+03	9.924E+03	1.488E+07	9.995E+02	
075	3.570E+04	2.858E+07	1.921E+03	9.535E+03	1.429E+07	9.603E+02	
2076	3.430E+04	2.746E+07	1.845E+03	9.161E+03	1.373E+07	9.226E+02	
2077	3.295E+04	2.639E+07	1.773E+03	8.802E+03	1.319E+07	8.865E+02	
2078	3.166E+04	2.535E+07	1.703E+03	8.457E+03	1.268E+07	8.517E+02	

Year		Total landfill gas			Methane			
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)		
2079	3.042E+04	2.436E+07	1.637E+03	8.125E+03	1.218E+07	8.183E+02		
2080	2.923E+04	2.340E+07	1.572E+03	7.807E+03	1.170E+07	7.862E+02		
2081	2.808E+04	2.249E+07	1.511E+03	7.501E+03	1.124E+07	7.554E+02		
2082	2.698E+04	2.160E+07	1.452E+03	7.206E+03	1.080E+07	7.258E+02		
2083	2.592E+04	2.076E+07	1.395E+03	6.924E+03	1.038E+07	6.973E+02		
2084	2.491E+04	1.994E+07	1.340E+03	6.652E+03	9.971E+06	6.700E+02		
2085	2.393E+04	1.916E+07	1.287E+03	6.392E+03	9.580E+06	6.437E+02		
2086	2.299E+04	1.841E+07	1.237E+03	6.141E+03	9.205E+06	6.185E+02		
2087	2.209E+04	1.769E+07	1.188E+03	5.900E+03	8.844E+06	5.942E+02		
2088	2.122E+04	1.699E+07	1.142E+03	5.669E+03	8.497E+06	5.709E+02		
2089	2.039E+04	1.633E+07	1.097E+03	5.447E+03	8.164E+06	5.485E+02		
2090	1.959E+04	1.569E+07	1.054E+03	5.233E+03	7.844E+06	5.270E+02		
2091	1.882E+04	1.507E+07	1.013E+03	5.028E+03	7.536E+06	5.064E+02		
2092	1.808E+04	1.448E+07	9.730E+02	4.831E+03	7.241E+06	4.865E+02		
2093	1.738E+04	1.391E+07	9.349E+02	4.641E+03	6.957E+06	4.674E+02		
094	1.669E+04	1.337E+07	8.982E+02	4.459E+03	6.684E+06	4.491E+02		
095	1.604E+04	1.284E+07	8.630E+02	4.284E+03	6.422E+06	4.315E+02		
096	1.541E+04	1.234E+07	8.291E+02	4.116E+03	6.170E+06	4.146E+02		
2097	1.481E+04	1.186E+07	7.966E+02	3.955E+03	5.928E+06	3.983E+02		
098	1.423E+04	1.139E+07	7.654E+02	3.800E+03	5.696E+06	3.827E+02		
2099	1.367E+04	1.094E+07	7.354E+02	3.651E+03	5.472E+06	3.677E+02		
2100	1.313E+04	1.052E+07	7.065E+02	3.508E+03	5.258E+06	3.533E+02		
2101	1.262E+04	1.010E+07	6.788E+02	3.370E+03	5.052E+06	3.394E+02		
102	1.212E+04	9.707E+06	6.522E+02	3.238E+03	4.854E+06	3.261E+02		
2103	1.165E+04	9.327E+06	6.267E+02	3.111E+03	4.663E+06	3.133E+02		
104	1.119E+04	8.961E+06	6.021E+02	2.989E+03	4.480E+06	3.010E+02		
105	1.075E+04	8.610E+06	5.785E+02	2.872E+03	4.305E+06	2.892E+02		
106	1.033E+04	8.272E+06	5.558E+02	2.759E+03	4.136E+06	2.779E+02		
107	9.925E+03	7.948E+06	5.340E+02	2.651E+03	3.974E+06	2.670E+02		
108	9.536E+03	7.636E+06	5.131E+02	2.547E+03	3.818E+06	2.565E+02		
2109	9.162E+03	7.337E+06	4.929E+02	2.447E+03	3.668E+06	2.465E+02		
2110	8.803E+03	7.049E+06	4.736E+02	2.351E+03	3.524E+06	2.368E+02		
111	8.458E+03	6.772E+06	4.550E+02	2.259E+03	3.386E+06	2.275E+02		
2112	8.126E+03	6.507E+06	4.372E+02	2.171E+03	3.253E+06	2.186E+02		
2113	7.807E+03	6.252E+06	4.201E+02	2.085E+03	3.126E+06	2.100E+02		
2114	7.501E+03	6.007E+06	4.036E+02	2.004E+03	3.003E+06	2.018E+02		
2115	7.207E+03	5.771E+06	3.878E+02	1.925E+03	2.886E+06	1.939E+02		
2116	6.925E+03	5.545E+06	3.726E+02	1.850E+03	2.772E+06	1.863E+02		
2117	6.653E+03	5.327E+06	3.579E+02	1.777E+03	2.664E+06	1.790E+02		
2118	6.392E+03	5.119E+06	3.439E+02	1.707E+03	2.559E+06	1.720E+02		

Year		Carbon dioxide		NMOC			
	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
978	0	0	0	0	0	0	
979	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
980	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
981	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
982	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
983	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
984	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
985	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
986	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
987	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
988	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
989	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
990	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
991	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
992	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
993	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
994	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
995	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
996	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
997	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	
998	1.912E+03	1.045E+06	7.018E+01	4.493E+00	1.253E+03	8.422E-02	
999	3.875E+03	2.117E+06	1.422E+02	9.106E+00	2.540E+03	1.707E-01	
000	5.878E+03	3.211E+06	2.157E+02	1.381E+01	3.853E+03	2.589E-01	
001	7.680E+03	4.195E+06	2.819E+02	1.805E+01	5.034E+03	3.383E-01	
002	9.521E+03	5.201E+06	3.495E+02	2.237E+01	6.241E+03	4.194E-01	
003	1.136E+04	6.204E+06	4.168E+02	2.668E+01	7.444E+03	5.002E-01	
004	1.272E+04	6.950E+06	4.670E+02	2.989E+01	8.340E+03	5.604E-01	
005	1.523E+04	8.320E+06	5.590E+02	3.579E+01	9.984E+03	6.708E-01	
006	1.767E+04	9.655E+06	6.487E+02	4.153E+01	1.159E+04	7.785E-01	
007	2.021E+04	1.104E+07	7.418E+02	4.749E+01	1.325E+04	8.902E-01	
800	2.242E+04	1.225E+07	8.230E+02	5.269E+01	1.470E+04	9.876E-01	
009	2.417E+04	1.320E+07	8.872E+02	5.680E+01	1.584E+04	1.065E+00	
010	2.547E+04	1.391E+07	9.347E+02	5.984E+01	1.669E+04	1.122E+00	
011	2.666E+04	1.456E+07	9.785E+02	6.264E+01	1.748E+04	1.174E+00	
012	2.793E+04	1.526E+07	1.025E+03	6.563E+01	1.831E+04	1.230E+00	
013	2.923E+04	1.597E+07	1.073E+03	6.868E+01	1.916E+04	1.287E+00	
014	3.029E+04	1.655E+07	1.112E+03	7.118E+01	1.986E+04	1.334E+00	
015	3.154E+04	1.723E+07	1.158E+03	7.410E+01	2.067E+04	1.389E+00	
016	3.303E+04	1.804E+07	1.212E+03	7.761E+01	2.165E+04	1.455E+00	
017	3.475E+04	1.898E+07	1.275E+03	8.165E+01	2.278E+04	1.530E+00	
018	3.866E+04	2.112E+07	1.419E+03	9.084E+01	2.534E+04	1.703E+00	
019	4.276E+04	2.336E+07	1.570E+03	1.005E+02	2.803E+04	1.883E+00	
020	4.660E+04	2.546E+07	1.711E+03	1.095E+02	3.055E+04	2.053E+00	
021	4.910E+04	2.683E+07	1.802E+03	1.154E+02	3.219E+04	2.163E+00	
022	5.123E+04	2.799E+07	1.881E+03	1.204E+02	3.359E+04	2.257E+00	
023	5.328E+04	2.911E+07	1.956E+03	1.252E+02	3.493E+04	2.347E+00	
024	5.525E+04	3.018E+07	2.028E+03	1.298E+02	3.622E+04	2.434E+00	
025	5.714E+04	3.121E+07	2.020E+03	1.343E+02	3.746E+04	2.517E+00	
026	5.895E+04	3.221E+07	2.164E+03	1.385E+02	3.865E+04	2.597E+00	
2027	6.070E+04	3.316E+07	2.228E+03	1.426E+02	3.979E+04	2.674E+00	

Voor		Carbon dioxide		NMOC			
Year	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)	
2028	6.238E+04	3.408E+07	2.290E+03	1.466E+02	4.089E+04	2.747E+00	
2029	6.399E+04	3.496E+07	2.349E+03	1.504E+02	4.195E+04	2.818E+00	
030	6.553E+04	3.580E+07	2.405E+03	1.540E+02	4.296E+04	2.887E+00	
2031	6.702E+04	3.661E+07	2.460E+03	1.575E+02	4.394E+04	2.952E+00	
2032	6.845E+04	3.739E+07	2.512E+03	1.608E+02	4.487E+04	3.015E+00	
2033	6.982E+04	3.814E+07	2.563E+03	1.641E+02	4.577E+04	3.075E+00	
2034	7.114E+04	3.886E+07	2.611E+03	1.672E+02	4.664E+04	3.133E+00	
035	7.241E+04	3.956E+07	2.658E+03	1.701E+02	4.747E+04	3.189E+00	
2036	7.362E+04	4.022E+07	2.702E+03	1.730E+02	4.826E+04	3.243E+00	
2037	7.479E+04	4.086E+07	2.745E+03	1.757E+02	4.903E+04	3.294E+00	
2038	7.592E+04	4.147E+07	2.787E+03	1.784E+02	4.977E+04	3.344E+00	
2039	7.700E+04	4.206E+07	2.826E+03	1.809E+02	5.047E+04	3.391E+00	
2040	7.803E+04	4.263E+07	2.864E+03	1.834E+02	5.115E+04	3.437E+00	
041	7.903E+04	4.317E+07	2.901E+03	1.857E+02	5.181E+04	3.481E+00	
042	7.999E+04	4.370E+07	2.936E+03	1.880E+02	5.244E+04	3.523E+00	
043	8.091E+04	4.420E+07	2.970E+03	1.901E+02	5.304E+04	3.564E+00	
044	8.179E+04		3.002E+03	1.922E+02	5.362E+04	3.603E+00	
		4.468E+07					
045	8.264E+04	4.515E+07	3.033E+03	1.942E+02	5.417E+04	3.640E+00	
046	8.346E+04	4.559E+07	3.063E+03	1.961E+02	5.471E+04	3.676E+00	
047	8.018E+04	4.380E+07	2.943E+03	1.884E+02	5.256E+04	3.532E+00	
048	7.704E+04	4.209E+07	2.828E+03	1.810E+02	5.050E+04	3.393E+00	
049	7.402E+04	4.044E+07	2.717E+03	1.739E+02	4.852E+04	3.260E+00	
050	7.112E+04	3.885E+07	2.610E+03	1.671E+02	4.662E+04	3.132E+00	
051	6.833E+04	3.733E+07	2.508E+03	1.606E+02	4.479E+04	3.010E+00	
052	6.565E+04	3.586E+07	2.410E+03	1.543E+02	4.304E+04	2.892E+00	
2053	6.307E+04	3.446E+07	2.315E+03	1.482E+02	4.135E+04	2.778E+00	
054	6.060E+04	3.311E+07	2.224E+03	1.424E+02	3.973E+04	2.669E+00	
2055	5.822E+04	3.181E+07	2.137E+03	1.368E+02	3.817E+04	2.565E+00	
2056	5.594E+04	3.056E+07	2.053E+03	1.315E+02	3.667E+04	2.464E+00	
2057	5.375E+04	2.936E+07	1.973E+03	1.263E+02	3.524E+04	2.367E+00	
2058	5.164E+04	2.821E+07	1.896E+03	1.213E+02	3.385E+04	2.275E+00	
059	4.962E+04	2.711E+07	1.821E+03	1.166E+02	3.253E+04	2.185E+00	
2060	4.767E+04	2.604E+07	1.750E+03	1.120E+02	3.125E+04	2.100E+00	
2061	4.580E+04	2.502E+07	1.681E+03	1.076E+02	3.003E+04	2.017E+00	
062	4.401E+04	2.404E+07	1.615E+03	1.034E+02	2.885E+04	1.938E+00	
063	4.228E+04	2.310E+07	1.552E+03	9.935E+01	2.772E+04	1.862E+00	
064	4.062E+04	2.219E+07	1.491E+03	9.545E+01	2.663E+04	1.789E+00	
065	3.903E+04	2.132E+07	1.433E+03	9.171E+01	2.559E+04	1.719E+00	
066	3.750E+04	2.049E+07	1.376E+03	8.812E+01	2.458E+04	1.652E+00	
2067	3.603E+04	1.968E+07	1.322E+03	8.466E+01	2.362E+04	1.587E+00	
2068	3.462E+04	1.891E+07	1.271E+03	8.134E+01	2.269E+04	1.525E+00	
2069	3.326E+04	1.817E+07	1.221E+03	7.815E+01	2.180E+04	1.465E+00	
2070	3.195E+04	1.746E+07	1.173E+03	7.509E+01	2.095E+04	1.407E+00	
071	3.070E+04	1.677E+07	1.127E+03	7.214E+01	2.013E+04	1.352E+00	
2072	2.950E+04	1.611E+07	1.083E+03	6.931E+01	1.934E+04	1.299E+00	
2073	2.834E+04	1.548E+07	1.040E+03	6.660E+01	1.858E+04	1.248E+00	
2074	2.723E+04	1.488E+07	9.995E+02	6.399E+01	1.785E+04	1.199E+00	
2074	2.616E+04	1.429E+07	9.603E+02	6.148E+01	1.705E+04 1.715E+04	1.152E+00	
2076	2.514E+04	1.429E+07 1.373E+07	9.003E+02 9.226E+02	5.907E+01	1.648E+04	1.107E+00	
2077 2078	2.415E+04 2.320E+04	1.319E+07 1.268E+07	8.865E+02 8.517E+02	5.675E+01 5.452E+01	1.583E+04 1.521E+04	1.064E+00 1.022E+00	

## **Results (Continued)**

Year		Carbon dioxide			NMOC				
rear	(Mg/year)	(m³/year)	(av ft^3/min)	(Mg/year)	(m³/year)	(av ft^3/min)			
2079	2.229E+04	1.218E+07	8.183E+02	5.239E+01	1.461E+04	9.820E-01			
2080	2.142E+04	1.170E+07	7.862E+02	5.033E+01	1.404E+04	9.435E-01			
2081	2.058E+04	1.124E+07	7.554E+02	4.836E+01	1.349E+04	9.065E-01			
2082	1.977E+04	1.080E+07	7.258E+02	4.646E+01	1.296E+04	8.709E-01			
2083	1.900E+04	1.038E+07	6.973E+02	4.464E+01	1.245E+04	8.368E-01			
2084	1.825E+04	9.971E+06	6.700E+02	4.289E+01	1.197E+04	8.040E-01			
2085	1.754E+04	9.580E+06	6.437E+02	4.121E+01	1.150E+04	7.724E-01			
2086	1.685E+04	9.205E+06	6.185E+02	3.959E+01	1.105E+04	7.422E-01			
2087	1.619E+04	8.844E+06	5.942E+02	3.804E+01	1.061E+04	7.131E-01			
2088	1.555E+04	8.497E+06	5.709E+02	3.655E+01	1.020E+04	6.851E-01			
2089	1.494E+04	8.164E+06	5.485E+02	3.512E+01	9.797E+03	6.582E-01			
2090	1.436E+04	7.844E+06	5.270E+02	3.374E+01	9.413E+03	6.324E-01			
2091	1.380E+04	7.536E+06	5.064E+02	3.242E+01	9.043E+03	6.076E-01			
2092	1.325E+04	7.241E+06	4.865E+02	3.114E+01	8.689E+03	5.838E-01			
2093	1.273E+04	6.957E+06	4.674E+02	2.992E+01	8.348E+03	5.609E-01			
2094	1.224E+04	6.684E+06	4.491E+02	2.875E+01	8.021E+03	5.389E-01			
2095	1.176E+04	6.422E+06	4.315E+02	2.762E+01	7.706E+03	5.178E-01			
2096	1.129E+04	6.170E+06	4.146E+02	2.654E+01	7.404E+03	4.975E-01			
2097	1.085E+04	5.928E+06	3.983E+02	2.550E+01	7.114E+03	4.780E-01			
2098	1.043E+04	5.696E+06	3.827E+02	2.450E+01	6.835E+03	4.592E-01			
2099	1.002E+04	5.472E+06	3.677E+02	2.354E+01	6.567E+03	4.412E-01			
2100	9.624E+03	5.258E+06	3.533E+02	2.262E+01	6.309E+03	4.239E-01			
2101	9.247E+03	5.052E+06	3.394E+02	2.173E+01	6.062E+03	4.073E-01			
2102	8.885E+03	4.854E+06	3.261E+02	2.088E+01	5.824E+03	3.913E-01			
2103	8.536E+03	4.663E+06	3.133E+02	2.006E+01	5.596E+03	3.760E-01			
2104	8.201E+03	4.480E+06	3.010E+02	1.927E+01	5.377E+03	3.612E-01			
2105	7.880E+03	4.305E+06	2.892E+02	1.852E+01	5.166E+03	3.471E-01			
2106	7.571E+03	4.136E+06	2.779E+02	1.779E+01	4.963E+03	3.335E-01			
2107	7.274E+03	3.974E+06	2.670E+02	1.709E+01	4.769E+03	3.204E-01			
2108	6.989E+03	3.818E+06	2.565E+02	1.642E+01	4.582E+03	3.078E-01			
2109	6.715E+03	3.668E+06	2.465E+02	1.578E+01	4.402E+03	2.958E-01			
2110	6.451E+03	3.524E+06	2.368E+02	1.516E+01	4.229E+03	2.842E-01			
2111	6.199E+03	3.386E+06	2.275E+02	1.457E+01	4.063E+03	2.730E-01			
2112	5.955E+03	3.253E+06	2.186E+02	1.399E+01	3.904E+03	2.623E-01			
2113	5.722E+03	3.126E+06	2.100E+02	1.345E+01	3.751E+03	2.520E-01			
2114	5.498E+03	3.003E+06	2.018E+02	1.292E+01	3.604E+03	2.422E-01			
2115	5.282E+03	2.886E+06	1.939E+02	1.241E+01	3.463E+03	2.327E-01			
2116	5.075E+03	2.772E+06	1.863E+02	1.193E+01	3.327E+03	2.235E-01			
2117	4.876E+03	2.664E+06	1.790E+02	1.146E+01	3.196E+03	2.148E-01			
2118	4.685E+03	2.559E+06	1.720E+02	1.101E+01	3.071E+03	2.063E-01			

### **Coffin Butte 2021 Gas Generation Model**

#### **Assumptions and Notes**


- 1) Waste composition from 2020 to end of model based on historical and current waste composition.
  - MSW: 70.5%, C&D: 3%, Inert: 15.5%, Organics: 3%, Special: 8%
- 2) Collection efficiency was calculated using historical collection data and the model's projected generation
- 3) Waste categories have the  $L_0$  and k values listed in the "Gas Production by Waste Type" tab.
- 4) Waste acceptance in 2021 to end of of model will be 800,000 tons, as suggested by Republic
- 5) Flare data was provided by Republic from SCSe tools.


		Flare Data (Normalized	Overall Gas Generated		
	Waste Accepted	to 50% Methane)	(Combined Models)	Collection Efficiency	75% Collection Efficiency
Year	(tons)	(av ft^3/min)	(av ft^3/min)	(%)	(%)
1978	75000	(av it-5/iiiii)	0.00	(70)	0.00
1979	78000		25.92		19.44
1980	81000		51.86		38.89
1980	84000		77.82		58.36
1981	87000		103.79		77.84
1982	90000		129.79		97.34
1983	94000		154.07		115.55
1984	98000		178.71		134.03
1985	102000		203.69		154.05
1980	104000		228.99		171.74
1988	114000		253.96		190.47
1989	146000		279.02		209.26
1989	151000		312.93		234.69
			347.04		260.28
1991 1992	155000				
1992	200000		381.05 427.54		285.78
1993	255937				320.66 363.36
1994	269063 269063		484.48 542.97		407.23
1995					
1996	269063		599.16		449.37 489.87
1997	379210		653.16		
	395447 408055		780.92 913.21		585.69 684.91
1999 2000	409851				787.12
2000			1049.49		878.40
	425993		1171.20		
2002	453458		1296.67		972.50
2003	550660	1146.02	1424.75	75 40/	1068.56
2004	586561.65	1146.03	1526.80	75.1%	1145.10
2005	572347.22	1134.59	1706.44	66.5%	1279.83
2006	618341.00 546998.22	1396.16	1881.40	74.2%	1411.05
2007		1386.53	2065.92	67.1%	1549.44
2008	527316.09	2024.98	2224.17	91.0%	1668.13
2009	500692.92	2060.32	2348.33	87.7%	1761.24
2010	458587.75	2407.60	2440.84	98.6%	1830.63
2011	483034.63	2439.52	2522.30	96.7%	1891.73
2012	473551.03	2126.14	2608.21	81.5%	1956.15
2013		1922.90	2695.45	71.3%	2021.58
2014	499769.33	1988.07	2765.96	71.9%	2074.47
2015	528945.79	2049.93	2854.01	71.8%	2140.50
2016	555899.04	2099.45	2964.76	70.8%	2223.57
2017	944842.77	2279.49	3089.36	73.8%	2317.02
2018	1013887.57	2049.67	3385.14	60.5%	2538.86
2019	1043494.30	2496.95	3698.36	67.5%	2773.77
2020	859924.27	3094.66	4011.17	77.2%	3008.38
2021	800000		4209.18		3156.89
2022	800000		4381.42		3286.06

	Waste Accepted	Flare Data (Normalized to 50% Methane)	Overall Gas Generated (Combined Models)	Collection Efficiency	75% Collection Efficiency
/ear	(tons)	(av ft^3/min)	(av ft^3/min)	(%)	(%)
2023	800000		4546.77		3410.07
2024	800000		4705.50		3529.12
2025	800000		4857.88		3643.41
2026	800000		5004.18		3753.13
2027	800000		5144.62		3858.47
2028	800000		5279.45		3959.59
2029	800000		5408.90		4056.68
2030	800000		5533.18		4149.88
2031	800000		5652.49		4239.37
2032	800000		5767.04		4325.28
2033	800000		5877.02		4407.77
2034	800000		5982.61		4486.96
2035	800000		6083.99		4562.99
2036	800000		6181.32		4635.99
2037	800000		6274.77		4706.08
2038	800000		6364.50		4773.37
2038	800000		6450.65		4837.99
2039			6533.37		4900.02
2040	800000		6612.79		4959.59
2041	800000		6689.04		5016.78
2042	800000		6762.26		5071.70
2043	800000		6832.57		5124.43
2044	800000				
	800000		6900.07		5175.06
2046			6964.89		5223.67
2047			6690.83		5018.12
2048			6427.59		4820.69
2049			6174.75		4631.06
2050			5931.89		4448.92
2051			5698.63		4273.97
2052			5474.57		4105.93
2053			5259.36		3944.52
2054			5052.64		3789.48
2055			4854.08		3640.56
2056			4663.35		3497.51
2057			4480.14		3360.11
2058			4304.17		3228.12
2059			4135.13		3101.35
2060			3972.75		2979.57
2061			3816.78		2862.59
2062			3666.96		2750.22
2063			3523.04		2642.28
2064			3384.79		2538.59
2065			3251.98		2438.99
2066			3124.41		2343.31
2067			3001.86		2251.40
2068			2884.14		2163.11
2069			2771.05		2078.29
2070			2662.42		1996.81
2071			2558.06		1918.54
2072			2457.80		1843.35
2073			2361.49		1771.12
2074			2268.97		1701.73
2075			2180.09		1635.07
2076			2094.71		1571.03

			l		
		Flare Data (Normalized	Overall Gas Generated		
	Waste Accepted	to 50% Methane)	(Combined Models)	Collection Efficiency	75% Collection Efficiency
Year	(tons)	(av ft^3/min)	(av ft^3/min)	(%)	(%)
2077	(cons)	(ar it symmy	2012.68	(1-1)	1509.51
2078			1933.88		1450.41
2079			1858.17		1393.63
2080			1785.44		1339.08
2081			1715.57		1286.68
2082			1648.44		1236.33
2083			1583.95		1187.97
2084			1522.00		1141.50
2084			1462.47		1096.85
2083			1405.29		1053.97
2080					
			1350.35		1012.76
2088			1297.56		973.17
2089			1246.85		935.14
2090			1198.13		898.59
2091			1151.31		863.49
2092			1106.34		829.75
2093			1063.13		797.35
2094			1021.61		766.21
2095			981.72		736.29
2096			943.40		707.55
2097			906.58		679.93
2098			871.20		653.40
2099			837.20		627.90
2100			804.54		603.41
2101			773.16		579.87
2102			743.01		557.26
2103			714.04		535.53
2104			686.20		514.65
2105			659.45		494.59
2106			633.75		475.31
2107			609.06		456.79
2108			585.33		439.00
2109			562.53		421.90
2110			540.62		405.47
2111			519.57		389.68
2112			499.34		374.51
2112			479.90		359.93
2113			461.23		345.92
2114			443.28		332.46
2115			426.03		319.53
2117			409.46		307.10
2118			393.54		295.15

## **Overall Gas Generated**

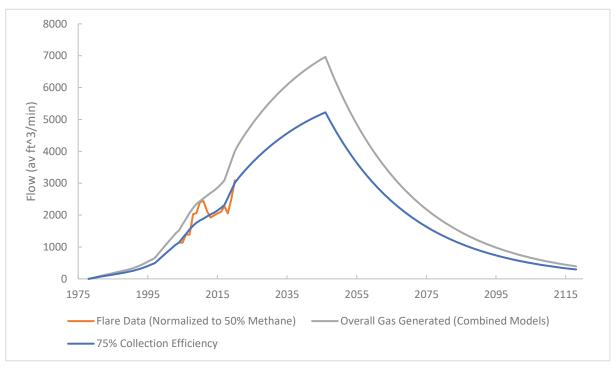

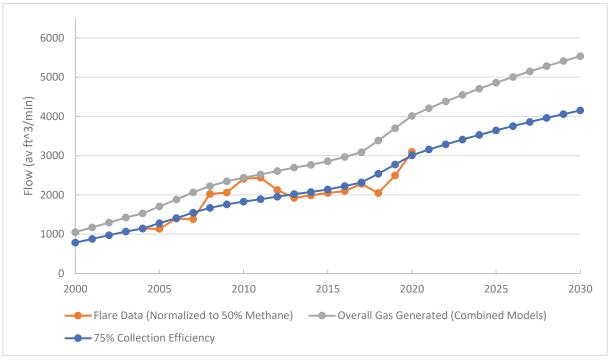


Gas Generation and Waste Accepted by Waste Type

Gas Generation and Waste Accepted by Waste Type									0										
	1978-1	.996 Model		MSW			C&D			Organics			Special Wast	e		Inert			ed Models)
	L_0:	80	L_0:		115	L_0:			L_0:	O Burnes	130			20	L_0:		0	(20011)	
	k: Waste	0.04	k: Waste		0.04	k: Waste		0.03	k: Waste		0.05	k: Waste		0.03	k: Waste		0	Waste	
	Accepted	Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted	Flow
Year	(tons)	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	(av ft^3/min)
1978	75000	0.00			0.00			0.00			0.00			0.00				75000.0	0.00
1979	78000	25.92			0.00			0.00			0.00			0.00				78000.0 81000.0	25.92
1980 1981	81000 84000	51.86 77.82			0.00			0.00			0.00			0.00				84000.0	51.86 77.82
1982	87000	103.79			0.00			0.00			0.00			0.00				87000.0	103.79
1983	90000	129.79			0.00			0.00			0.00			0.00				90000.0	129.79
1984	94000	154.07			0.00			0.00			0.00			0.00				94000.0	154.07
1985 1986	98000 102000	178.71 203.69			0.00			0.00			0.00			0.00				98000.0 102000.0	178.71 203.69
1987	104000	228.99			0.00			0.00			0.00			0.00				104000.0	228.99
1988	114000	253.96			0.00			0.00			0.00			0.00				114000.0	253.96
1989	146000	279.02			0.00			0.00			0.00			0.00				146000.0	279.02
1990 1991	151000 155000	312.93 347.04			0.00			0.00			0.00			0.00				151000.0 155000.0	312.93 347.04
1991	200000	347.04			0.00			0.00			0.00			0.00				200000.0	347.04
1993	255937	427.54			0.00			0.00			0.00			0.00				255937.0	427.54
1994	269063	484.48			0.00			0.00			0.00			0.00				269063.0	484.48
1995 1996	269063 269063	542.97 599.16			0.00			0.00			0.00			0.00				269063.0 269063.0	542.97 599.16
1996	209003	653.16	265852.0	70.1	0.00	46690.0	12.3	0.00			0.00	45082.0	11.9	0.00	21586.0	5.7	0.00	379210.0	653.16
1998		627.55	283395.0	71.7	146.74	50312.0	12.7	3.38			0.00	38467.0	9.7	3.26	23273.0	5.9	0.00	395447.0	780.92
1999		602.94	299558.0	73.4	297.41	54668.0	13.4	6.92			0.00	36824.0	9.0	5.95	17005.0	4.2	0.00	408055.0	913.21
2000 2001		579.30	282620.0	69.0	451.09	52476.0	12.8	10.66			0.00	39986.0	9.8	8.43	34769.0	8.5	0.00	409851.0	1049.49
2001		556.58 534.76	297873.0 307058.0	69.9 67.7	589.40 730.71	50933.0 50287.0	12.0 11.1	14.14 17.41			0.00	42110.0 76079.0	9.9 16.8	11.08 13.79	35077.0 20034.0	8.2 4.4	0.00	425993.0 453458.0	1171.20 1296.67
2003		513.79	251856.0	45.7	871.54	38318.0	7.0	20.53			0.00	217707.0	39.5	18.89	42779.0	7.8	0.00	550660.0	1424.75
2004		493.64	418075.3	71.3	976.38	16772.0	2.9	22.70			0.00	96563.0	16.5	34.07	55151.4	9.4	0.00	586561.7	1526.80
2005		474.29	422807.3	73.9	1168.86	25573.2	4.5	23.24			0.00	83513.5	14.6	40.05	40453.2	7.1	0.00	572347.2	1706.44
2006 2007		455.69 437.82	449037.0 417750.7	72.6 76.4	1356.40 1551.07	32200.0 20066.6	5.2 3.7	24.40 26.01			0.00	102845.0 89634.5	16.6 16.4	44.91 51.02	34259.0 19546.5	5.5 3.6	0.00	618341.0 546998.2	1881.40 2065.92
2008		420.66	365353.5	69.3	1720.83	11307.4	2.1	26.69			0.00	111850.7	21.2	55.99	38804.5	7.4	0.00	527316.1	2224.17
2009		404.16	311835.9	62.3	1855.02	9334.0	1.9	26.72			0.00	151182.2	30.2	62.42	28340.8	5.7	0.00	500692.9	2348.33
2010		388.31	304803.2	66.5	1954.41	6884.0	1.5	26.60			0.00	103498.7	22.6	71.51	43401.8	9.5	0.00	458587.8	2440.84
2011 2012		373.09 358.46	322017.5 333075.3	66.7 70.3	2046.01 2143.53	8090.8 6963.0	1.7	26.32 26.12			0.00	75795.7 57172.4	15.7 12.1	76.88 80.09	77130.6 76340.4	16.0 16.1	0.00	483034.6 473551.0	2522.30 2608.21
2012		344.40	306905.1	64.1	2243.33	10436.7	2.2	25.86			0.00	69313.8	14.5	81.86	92453.3	19.3	0.00	479108.8	2695.45
2014		330.90	338242.9	67.7	2324.76	23514.0	4.7	25.85			0.00	97269.0	19.5	84.45	40743.4	8.2	0.00	499769.3	2765.96
2015		317.92	379734.0	71.8	2420.31	20019.7	3.8	26.78	2871.2	0.5	0.00	114271.8	21.6	88.99	12049.0	2.3	0.00	528945.8	2854.01
2016 2017		305.46 293.48	418705.8 733666.1	75.3 77.6	2535.00 2666.72	14133.0 20768.3	2.5	27.44 27.65	2958.6 3088.1	0.5	2.23 4.42	72823.7 95369.3	13.1 10.1	94.63 97.10	47278.0 91951.0	8.5 9.7	0.00	555899.0 944842.8	2964.76 3089.36
2017		281.97	780921.6	77.0	2967.11	21229.9	2.2	28.33	3059.1	0.3	6.60	135685.9	13.4	101.12	72991.0	7.2	0.00	1013887.6	3385.14
2019		270.92	767375.4	73.5	3281.81	28746.8	2.8	29.03	29816.3	2.9	8.65	107788.4	10.3	107.95	109767.4	10.5	0.00	1043494.3	3698.36
2020		260.29	601846.5	70.0	3576.69	27222.0	3.2	30.25	19517.9	2.3	31.38	67632.2	7.9	112.55	143705.6	16.7	0.00	859924.3	4011.17
2021 2022		250.09 240.28	564000.0 564000.0		3768.64 3932.18	24000.0 24000.0		31.33 32.14	24000.0 24000.0		45.01 61.45	64000.0 64000.0		114.12 115.37	124000.0 124000.0		0.00	800000.0 800000.0	4209.18 4381.42
2022		240.28	564000.0		4089.30	24000.0		32.14	24000.0		77.09	64000.0		115.37	124000.0		0.00	800000.0	4381.42 4546.77
2024		221.81	564000.0		4240.27	24000.0		33.69	24000.0		91.96	64000.0		117.77	124000.0		0.00	800000.0	4705.50
2025		213.11	564000.0		4385.31	24000.0		34.43	24000.0		106.11	64000.0		118.92	124000.0		0.00	800000.0	4857.88
2026		204.76	564000.0		4524.67	24000.0		35.14	24000.0		119.57	64000.0		120.03	124000.0		0.00	800000.0	5004.18
2027 2028		196.73 189.01	564000.0 564000.0		4658.56 4787.20	24000.0 24000.0		35.84 36.52	24000.0 24000.0		132.38 144.56	64000.0 64000.0		121.12 122.16	124000.0 124000.0		0.00	800000.0 800000.0	5144.62 5279.45
2028		189.01	564000.0		4/87.20	24000.0		36.52	24000.0		156.14	64000.0		122.16	124000.0		0.00	800000.0	5279.45
2030		174.48	564000.0		5029.55	24000.0		37.81	24000.0		167.16	64000.0		124.17	124000.0		0.00	800000.0	5533.18
2031		167.64	564000.0		5143.65	24000.0		38.43	24000.0		177.64	64000.0		125.13	124000.0		0.00	800000.0	5652.49
2032		161.07	564000.0		5253.27	24000.0		39.03	24000.0		187.62	64000.0		126.06	124000.0		0.00	800000.0	5767.04
2033 2034		154.75 148.68	564000.0 564000.0		5358.60 5459.79	24000.0 24000.0		39.61 40.18	24000.0 24000.0		197.10 206.12	64000.0 64000.0		126.96 127.84	124000.0 124000.0		0.00	800000.0 800000.0	5877.02 5982.61
2034		140.00	334000.0		3433.73	24000.0		40.10	24000.0		200.12	04000.0		127.04	224000.0		0.00	300000.0	3302.01

	1978-1	.996 Model		MSW			C&D			Organics			Special Was	te		Inert			s Generated ed Models)
	L_0:	80	L_0:		115	L_0:			L_0:		130			20	L_0:		0	(	
	k: Waste	0.04	k: Waste		0.04	k: Waste		0.03	k: Waste		0.05	k: Waste		0.03	k: Waste		0	Waste	
	Accepted	Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted	Flow
Year	(tons)	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	(av ft^3/min)
2035		142.85	564000.0		5557.02	24000.0		40.72	24000.0		214.71	64000.0		128.69	124000.0		0.00	800000.0	6083.99
2036 2037		137.25 131.87	564000.0 564000.0		5650.43 5740.18	24000.0 24000.0		41.26 41.77	24000.0 24000.0		222.87	64000.0 64000.0		129.51 130.31	124000.0 124000.0		0.00	800000.0 800000.0	6181.32 6274.77
2037		126.70	564000.0		5826.41	24000.0		42.27	24000.0		238.02	64000.0		131.09	124000.0		0.00	800000.0	6364.50
2039		121.73	564000.0		5909.26	24000.0		42.76	24000.0		245.05	64000.0		131.84	124000.0		0.00	800000.0	6450.65
2040		116.96	564000.0		5988.86	24000.0		43.23	24000.0		251.73	64000.0		132.58	124000.0		0.00	800000.0	6533.37
2041		112.37	564000.0		6065.35	24000.0		43.69	24000.0		258.09	64000.0		133.29	124000.0		0.00	800000.0	6612.79
2042		107.97 103.73	564000.0 564000.0		6138.83 6209.43	24000.0 24000.0		44.13 44.57	24000.0 24000.0		264.14 269.89	64000.0 64000.0		133.98 134.64	124000.0 124000.0		0.00	800000.0 800000.0	6689.04 6762.26
2043		99.67	564000.0		6277.26	24000.0		44.98	24000.0		275.37	64000.0		135.29	124000.0		0.00	800000.0	6832.57
2045		95.76	564000.0		6342.43	24000.0		45.39	24000.0		280.57	64000.0		135.92	124000.0		0.00	800000.0	6900.07
2046		92.00			6405.05			45.78			285.52			136.53					6964.89
2047		88.40			6153.90			44.43			271.60			132.50					6690.83
2048 2049		84.93 81.60			5912.61 5680.77			43.12 41.84			258.35 245.75			128.58 124.78					6427.59
2049		78.40			5458.02			41.84			245.75			124.78					6174.75 5931.89
2051		75.33			5244.01			39.41			222.37			117.52					5698.63
2052		72.37			5038.39			38.24			211.52			114.04					5474.57
2053		69.53			4840.83			37.11			201.21			110.67					5259.36
2054 2055		66.81 64.19			4651.02 4468.65			36.02 34.95			191.39 182.06			107.40 104.23					5052.64 4854.08
2055		61.67			4293.43			33.92			173.18			104.23					4663.35
2057		59.25			4125.09			32.92			164.73			98.16					4480.14
2058		56.93			3963.34			31.94			156.70			95.26					4304.17
2059		54.70			3807.93			31.00			149.06			92.44					4135.13
2060 2061		52.55 50.49			3658.62 3515.17			30.08 29.19			141.79 134.87			89.71 87.06					3972.75 3816.78
2061		48.51			3377.33			28.33			128.29			84.49					3666.96
2063		46.61			3244.91			27.49			122.04			81.99					3523.04
2064		44.78			3117.67			26.68			116.09			79.57					3384.79
2065		43.03			2995.43			25.89			110.42			77.21					3251.98
2066 2067		41.34 39.72			2877.97 2765.13			25.13 24.38			105.04 99.92			74.93 72.72					3124.41 3001.86
2067		38.16			2656.71			23.66			95.04			70.57					2884.14
2069		36.66			2552.53			22.96			90.41			68.48					2771.05
2070		35.23			2452.45			22.29			86.00			66.46					2662.42
2071		33.85			2356.29			21.63			81.80			64.49					2558.06
2072 2073		32.52 31.24			2263.89 2175.13			20.99			77.81 74.02			62.59 60.74					2457.80 2361.49
2073		30.02			2089.84			19.77			70.41			58.94					2268.97
2075		28.84			2007.89			19.18			66.98			57.20					2180.09
2076		27.71			1929.16			18.61			63.71			55.51					2094.71
2077		26.62			1853.52			18.06			60.60			53.87					2012.68
2078 2079		25.58 24.58			1780.84 1711.01			17.53 17.01			57.65 54.83			52.28 50.73					1933.88 1858.17
2079		23.61			1643.92			16.51			52.16			49.23					1785.44
2081		22.69			1579.47			16.02			49.62			47.78					1715.57
2082		21.80			1517.53			15.55			47.20			46.37					1648.44
2083		20.94			1458.03			15.09			44.89			45.00					1583.95
2084 2085		20.12 19.33			1400.86 1345.93			14.64 14.21			42.71 40.62			43.67 42.38					1522.00 1462.47
2085		18.57			1293.16			13.79			38.64			41.12					1405.29
2087		17.85			1242.45			13.38			36.76			39.91					1350.35
2088		17.15			1193.73			12.99			34.96			38.73					1297.56
2089		16.47			1146.93			12.60			33.26			37.58					1246.85
2090 2091		15.83 15.21			1101.96 1058.75			12.23 11.87			31.64 30.09			36.47 35.40					1198.13 1151.31
2091		14.61			1017.23			11.87			28.63			34.35					1106.34
2093		14.04			977.35			11.18			27.23			33.33					1063.13

		996 Model		MSW			C&D			Organics			Special Wast			Inert			ed Models)
	L_0:		L_0:		115				L_0:		130				L_0:		0		
	k: Waste	0.04	k: Waste		0.04	k: Waste		0.03	k: Waste		0.05	k: Waste		0.03	k: Waste		0	Waste	
	Accepted	Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted		Flow	Accepted	Flow
Year	(tons)	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	% Total	(av ft^3/min)	(tons)	(av ft^3/min)
7ear 2094	(tons)	, , ,	(tons)	70 TOLAI	939.02	(tons)	70 TOLAI		(tons)	76 TOTAL	25.90	(tons)	76 TOTAL	32.35	(tons)	76 TOTAL	(av it-s/iiiii)	(tons)	
2094		13.49						10.85											1021.61
		12.96 12.45			902.21 866.83			10.53			24.64			31.39 30.46					981.72 943.40
2096 2097		12.45			832.84			10.22 9.91			23.44			29.56					943.40
2097		11.49			800.18			9.91			21.21			29.56					871.20
2098		11.49			768.81			9.62			20.17			27.84					871.20
2100		10.61			738.66			9.06			19.19			27.02					804.54
2100		10.01			709.70			8.79			18.25			26.22					773.16
2101		9.79			681.87			8.53			17.36			25.45					743.01
2102		9.41			655.14			8.28			16.52			24.69					714.04
2103		9.04			629.45			8.04			15.71			23.96					686.20
2105		8.69			604.77			7.80			14.94			23.26					659.45
2106		8.35			581.05			7.57			14.22			22.57					633.75
2107		8.02			558.27			7.34			13.52			21.90					609.06
2108		7.70			536.38			7.13			12.86			21.25					585.33
2109		7.40			515.35			6.92			12.24			20.63					562.53
2110		7.11			495.14			6.71			11.64			20.02					540.62
2111		6.83			475.73			6.51			11.07			19.43					519.57
2112		6.57			457.07			6.32			10.53			18.85					499.34
2113		6.31			439.15			6.13			10.02			18.29					479.90
2114		6.06			421.93			5.95			9.53			17.75					461.23
2115		5.82			405.39			5.78			9.06			17.23					443.28
2116		5.59			389.49			5.61			8.62			16.72					426.03
2117		5.38			374.22			5.44			8.20			16.23					409.46
2118		5.16			359.55			5.28			7.80			15.75					393.54

# **Gas Generation by Waste Type**

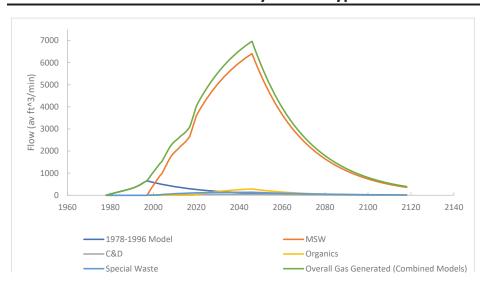




#### **Coffin Butte Master Plan 2021**

# Deep	# Shallow	Total	LandGEM
Wells	Wells	Flow	Flow (2047)
47	146	6965	

Blower Vacuum: 50" W.C.	Flow per Well				
Minimum Vacuum Need: 30" W.C.	Deep	Shallow			
	55	30			

Segments (Route from Facility to Point)						
						Total
						Pressure
			Flow	Length	Pipe Size	Loss
Route	Deep	Shallow	(Q)	(L)	(in)	$(\Delta P_T)$
A1	17	55	2585	2851	24	4.4
B10	30	91	4380	709	24	2.28
1011	30	68	3690	906	24	4.87
913	15	23	1515	1165	12	14.09
114	15	44	2145	2967	18	5
12	7	42	1645	1873	24	5.4
24	7	29	1255	3944	18	10.27
216	19	10	1345	1296	18	10.11
1112	8	33	1430	1815	18	8.01
1218	11	10	905	669	12	10.38
1819	5	1	305	657	8	15.56
94	15	40	2025	4751	18	17.44
714	0	8	240	1320	12	4.03
815	0	6	180	646	12	5.05
108	18	56	2670	646	18	6.55

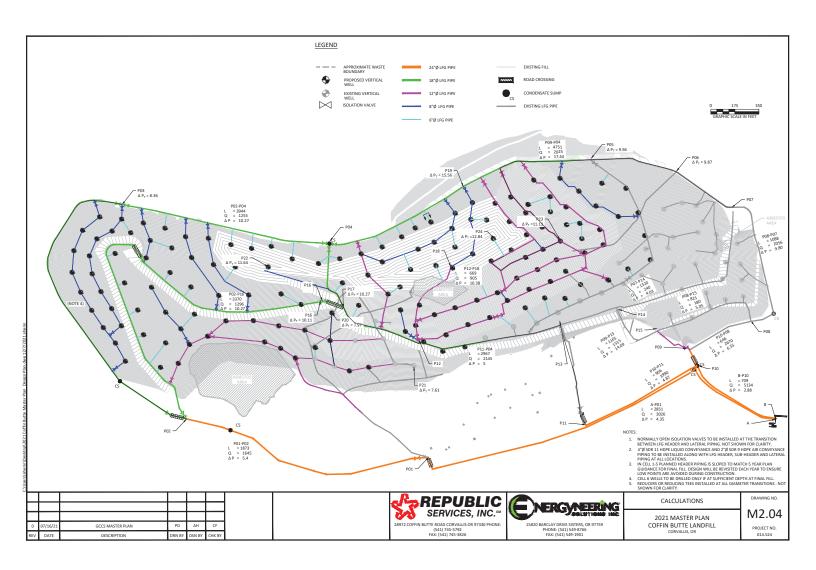

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach Colebrook-White

SCFM is assumed with Standard Conditions

Assumptions

Viscosity based off 50%CH4 + 50%CO2.

Standard Conditions

Barometric Pressure: 14.7 psi

Temperature: 68 Relative Humidity: 0%

Density:

Segment A - 21

**Site Conditions** System Vacuum (in WC) 50 Fluid Temp (F) Fluid Relative Humidity (%) Local Barometric Pressure (psi)

100 add equations Darcy, colebrook-white

100% refereance conditions

14.7 SCFM defined at 68, 0%, 14.7 psi

add "no fittings" Verify density add "viscosity 50%50%"

Length 1 (closest to vacuum source) Type of Pipe SDR\_17\_HDPE Pipe Size (in) 24 Pipe Length (ft) 2851 Flow (SCFM) 3026 Fluid Velocity (ft/min) 1,640.62 **27.34** < 58 ft/s Fluid Velocity (ft/s) Pressure Loss/m (kPa/m) 0.0013 Pressure Loss (in WC) 4.44 4.44 Pressure Loss\_sum (in WC)

< 3,500 ft/min

< 0.2269

Length 2 (next closest to vacuum source) SDR\_17\_HDPE Type of Pipe Pipe Size (in) 12 Pipe Length (ft) 2138 Flow (SCFM) 550 Fluid Velocity (ft/min) 1,042.58 Fluid Velocity (ft/s) 17.38 Pressure Loss/m (kPa/m) 0.0012 Pressure Loss (in WC) 3.17 Pressure Loss\_sum (in WC) 7.61

< 3,500 ft/min < 58 ft/s

< 0.2112

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White Segment A - 20

**Standard Conditions** Temperature: 68 Relative Humidity: 0%

Density:

Barometric Pressure: 14.7 psi

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

SCFM is assumed with Standard Conditions

**Site Conditions** System Vacuum (in WC) 50 Fluid Temp (F) 100 add equations Darcy, colebrook-white Fluid Relative Humidity (%) 100% refereance conditions Local Barometric Pressure (psi) 14.7 SCFM defined at 68, 0%, 14.7 psi add "no fittings"

Verify density add "viscosity 50%50%"

Length 1	(closest to vacuum source)		Verify density
Type of Pipe	SDR_17_HDPE		add "viscosity 5
Pipe Size (in)		24	
Pipe Length (ft)		2851	
Flow (SCFM)		3026	
Fluid Velocity (ft/min)		1,640.62	< 3,500 ft/min
Fluid Velocity (ft/s)		27.34	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0013	< 0.2269
Pressure Loss (in WC)		4.44	
Pressure Loss_sum (in WC)		4.44	

Length 2 (	next closest to vacuum source)		]
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		12	
Pipe Length (ft)		1565	
Flow (SCFM)		635	
Fluid Velocity (ft/min)		1,203.70	< 3,500 ft/mir
Fluid Velocity (ft/s)		20.06	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0016	< 0.212
Pressure Loss (in WC)		3.00	
Pressure Loss_sum (in WC)		7.44	

Length	2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		1
Pipe Size (in)		8	
Pipe Length (ft)		338	
Flow (SCFM)		200	
Fluid Velocity (ft/min)		821.22	< 3,5
Fluid Velocity (ft/s)		13.69	< 58 1
Pressure Loss/m (kPa/m)		0.0013	< 0.2
Pressure Loss (in WC)		0.53	
Pressure Loss_sum (in WC)		7.97	

500 ft/min ft/s 2094

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

1. Input data into green text cells

Temperature: 68 Relative Humidity: 0%

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30

m/s

Barometric Pressure: 14.7 psi

**Standard Conditions** 

Assumptions

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of Viscosity based off 50%CH4 + 50%CO2.

line pressure

Density:

\*Fittings are not incorperated in this program\*

**Equations Used:** 

Darcy-Weisbach

SCFM is assumed with Standard Conditions

Colebrook-White

Segment B - 24

Pipe Length (ft)

Pressure Loss (in WC)

Pressure Loss\_sum (in WC)

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100 add equations Darcy, colebrook-w	hite
Fluid Relative Humidity (%)	100% refereance conditions	
Local Barometric Pressure (psi)	14.7 SCFM defined at 68, 0%, 14.7 psi	

add "no fittings"

Verify density Length 1 (closest to vacuum source) Type of Pipe SDR 17 HDPE add "viscosity 50%50%" Pipe Size (in) 24

Flow (SCFM) 5134 Fluid Velocity (ft/min) **2,783.53** < 3,500 ft/min Fluid Velocity (ft/s) **46.39** < 58 ft/s 0.0033 Pressure Loss/m (kPa/m)

< 0.2321

840

3.41

3.41

Length 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		18
Pipe Length (ft)		646
Flow (SCFM)		2670
Fluid Velocity (ft/min)		2,547.37
Fluid Velocity (ft/s)		42.46
Pressure Loss/m (kPa/m)		0.0040
Pressure Loss (in WC)		3.14
Pressure Loss_sum (in WC)		6.55

< 3,500 ft/min 58 ft/s

< 0.2165

Length 2 (next closest to vacuum source)			
Type of Pipe	SDR_17_HDPE		1
Pipe Size (in)		18	
Pipe Length (ft)		1088	
Flow (SCFM)		2056	
Fluid Velocity (ft/min)		1,943.30	< 3,500 ft
Fluid Velocity (ft/s)		32.39	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0024	< 0.2003
Pressure Loss (in WC)		3.25	1

min.

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity <  $\sim$ 3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

Equations Used:

Darcy-Weisbach Colebrook-White

Segment B - 23

Assumptions

Standard Conditions
Temperature: 68
Relative Humidity: 0%
Barometric Pressure: 14.7 psi

Density:

Viscosity based off 50%CH4 + 50%CO2.

SCFM is assumed with Standard Conditions

50%50%"

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100	add equations Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance conditions
Local Barometric Pressure (psi)	14.7	SCFM defined at 68, 0%, 14.7 psi
		add "no fittings"

		U
L (closest to vacuum source)		Verify density
SDR_17_HDPE		add "viscosity 5
	24	
	840	
	5134	
	2,783.53	< 3,500 ft/min
	46.39	< 58 ft/s
	0.0033	< 0.2321
	3.41	
	3.41	
	•	SDR_17_HDPE 24 840 5134 2,783.53 46.39 0.0033 3.41

Length 2 (n	ext closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		646	
Flow (SCFM)		2670	
Fluid Velocity (ft/min)		2,547.37	< 3,500 ft/min
Fluid Velocity (ft/s)		42.46	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0040	< 0.2165
Pressure Loss (in WC)		3.14	
Pressure Loss_sum (in WC)		6.55	

Length	2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		1088	
Flow (SCFM)		2056	
Fluid Velocity (ft/min)		1,943.30	< 3,500 ft/mir
Fluid Velocity (ft/s)		32.39	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0024	< 0.2003
Pressure Loss (in WC)		3.25	
Pressure Loss_sum (in WC)		9.80	

Length 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		18
Pipe Length (ft)		496
Flow (SCFM)		390
Fluid Velocity (ft/min)		365.11

3,500 ft/min

Fluid Velocity (ft/s)	6.09	< 58 ft/s
Pressure Loss/m (kPa/m)	0.0001	< 0.1999
Pressure Loss (in WC)	0.07	
Pressure Loss_sum (in WC)	9.87	

Length 2	! (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		636	
Flow (SCFM)		330	
Fluid Velocity (ft/min)		308.87	< 3,500 ft/mi
Fluid Velocity (ft/s)		5.15	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0001	< 0.1995
Pressure Loss (in WC)		0.07	
Pressure Loss_sum (in WC)		9.94	

Length 2	2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		677	
Flow (SCFM)		700	
Fluid Velocity (ft/min)		655.04	< 3,500 ft/mi
Fluid Velocity (ft/s)		10.92	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0003	< 0.1981
Pressure Loss (in WC)		0.29	
Pressure Loss_sum (in WC)		10.23	

Length 2 (n	ext closest to vacuum source)	1
Type of Pipe	SDR_17_HDPE	1
Pipe Size (in)	17	2
Pipe Length (ft)	717	2
Flow (SCFM)	510	)
Fluid Velocity (ft/min)	950.35	< 3,500 ft/min
Fluid Velocity (ft/s)	15.84	< 58 ft/s
Pressure Loss/m (kPa/m)	0.0010	< 0.1937
Pressure Loss (in WC)	0.89	
Pressure Loss_sum (in WC)	11.13	

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** 

Darcy-Weisbach

Colebrook-White Segment: B - 22

Pressure Loss\_sum (in WC)

SCFM is assumed with Standard Conditions

colebrook-white

Assumptions

Viscosity based off 50%CH4 + 50%CO2.

**Standard Conditions** 

Barometric Pressure: 14.7 psi

Temperature: 68 Relative Humidity: 0%

Density:

Site Conditions	
System Vacuum (in WC)	50
Fluid Temp (F)	100 add equations Darcy, colebrook
Fluid Relative Humidity (%)	100% refereance conditions
Local Barometric Pressure (psi)	14.7 SCFM defined at 68, 0%, 14.7 psi

add "no fittings"

Length 1 (closest to vacuum source) Verify density SDR\_17\_HDPE Type of Pipe add "viscosity 50%50%" Pipe Size (in) 24 Pipe Length (ft) 709 Flow (SCFM) 5134

Fluid Velocity (ft/min) Fluid Velocity (ft/s) 46.39 Pressure Loss/m (kPa/m) Pressure Loss (in WC) 2.88

**2,783.53** < 3,500 ft/min < 58 ft/s **0.0033** < 0.2348

2.88

Length 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		24
Pipe Length (ft)		906
Flow (SCFM)		3690
Fluid Velocity (ft/min)		1,983.39
Fluid Velocity (ft/s)		33.06
Pressure Loss/m (kPa/m)		0.0018
Pressure Loss (in WC)		1.99
Pressure Loss_sum (in WC)		4.87

< 3,500 ft/min < 58 ft/s < 0.2248

Length 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		18
Pipe Length (ft)		2630
Flow (SCFM)		1845
Fluid Velocity (ft/min)		1,752.62
Fluid Velocity (ft/s)		29.21
Pressure Loss/m (kPa/m)		0.0020
Pressure Loss (in WC)		6.52
Pressure Loss_sum (in WC)		11.38

< 3,500 ft/min < 58 ft/s < 0.1924

Le	ngth 2 (next closest to vacuum source)	
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		8
Pipe Length (ft)		487
Flow (SCFM)		110
Fluid Velocity (ft/min)		446.47

< 3,500 ft/min

Fluid Velocity (ft/s)	7.44	< 58 ft/s
Pressure Loss/m (kPa/m)	0.0004	< 0.1911
Pressure Loss (in WC)	0.26	
Pressure Loss_sum (in WC)	11.64	

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White Segment 10 - 8

Assumptions

**Standard Conditions** Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

Viscosity based off 50%CH4 + 50%CO2.

Density:

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100	add equations Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance conditions
Local Barometric Pressure (psi)	14.7	SCFM defined at 68, 0%, 14.7 psi
		add "no fittings"

Length 1 (closest to vacuum source) Verify density SDR\_17\_HDPE Type of Pipe add "viscosity 50%50%" Pipe Size (in) 24 Pipe Length (ft) 840 Flow (SCFM) 5134 Fluid Velocity (ft/min) **2,783.53** < 3,500 ft/min

< 58 ft/s Fluid Velocity (ft/s) **0.0033** < 0.2321 Pressure Loss/m (kPa/m) Pressure Loss (in WC) 3.41

Pressure Loss\_sum (in WC) 3.41

Length 2 (	next closest to vacuum source)		1
Type of Pipe	SDR_17_HDPE		1
Pipe Size (in)		18	
Pipe Length (ft)		646	
Flow (SCFM)		2670	
Fluid Velocity (ft/min)		2,547.37	< 3,500 ft/mi
Fluid Velocity (ft/s)		42.46	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0040	< 0.2165
Pressure Loss (in WC)		3.14	1
Pressure Loss_sum (in WC)		6.55	

nin

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity  $< \sim 3,500 \text{ ft/min}$ 

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

Equations Used: Darcy-Weisbach

Colebrook-White **Segment: 8 - 15** 

Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

**Standard Conditions** 

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

Density:

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100 add equations Darcy, colebroo	k-white
Fluid Relative Humidity (%)	100% refereance conditions	
Local Barometric Pressure (psi)	14.7 SCFM defined at 68, 0%, 14.7 ps	si
	add "no fittings"	

Length 1 (closest to vacuum source) Verify density SDR\_17\_HDPE Type of Pipe add "viscosity 50%50%" Pipe Size (in) Pipe Length (ft) 840 Flow (SCFM) 5134 Fluid Velocity (ft/min) **2,783.53** < 3,500 ft/min < 58 ft/s Fluid Velocity (ft/s) **0.0033** < 0.2321 Pressure Loss/m (kPa/m) Pressure Loss (in WC) 3.41 Pressure Loss\_sum (in WC) 3.41

Length 2 (no	ext closest to vacuum source)		]
Type of Pipe	SDR_17_HDPE		1
Pipe Size (in)		18	
Pipe Length (ft)		2670	
Flow (SCFM)		760	
Fluid Velocity (ft/min)		725.09	< 3,500 ft/min
Fluid Velocity (ft/s)		12.08	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0004	< 0.2253
Pressure Loss (in WC)		1.36	1
Pressure Loss_sum (in WC)		4.77	1

Length 2 (no	ext closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		12	
Pipe Length (ft)		821	
Flow (SCFM)		240	
Fluid Velocity (ft/min)		454.50	< 3,500 ft/min
Fluid Velocity (ft/s)		7.58	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0003	< 0.2239
Pressure Loss (in WC)		0.28	
Pressure Loss_sum (in WC)		5.05	

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White **Segment 7 - 14** 

Assumptions **Standard Conditions** 

Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

Viscosity based off 50%CH4 + 50%CO2.

Density:

SCFM is assumed with Standard Conditions

Site Conditions	
System Vacuum (in WC)	50
Fluid Temp (F)	100
Fluid Relative Humidity (%)	100%
Local Barometric Pressure (psi)	14.7

add equations Darcy, colebrook-white

refereance conditions

SCFM defined at 68, 0%, 14.7 psi

add "no fittings" Verify density

Length	1 (closest to vacuum source)		Verify density
Type of Pipe	SDR_17_HDPE		add "viscosity 50%50%"
Pipe Size (in)		24	
Pipe Length (ft)		840	
Flow (SCFM)		5134	
Fluid Velocity (ft/min)		2,783.53	< 3,500 ft/min
Fluid Velocity (ft/s)		46.39	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0033	< 0.2321
Pressure Loss (in WC)		3.41	
Pressure Loss_sum (in WC)		3.41	

Length 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		12
Pipe Length (ft)		287
Flow (SCFM)		150
Fluid Velocity (ft/min)		285.22
Fluid Velocity (ft/s)		4.75
Pressure Loss/m (kPa/m)		0.0001
Pressure Loss (in WC)		0.04
Pressure Loss_sum (in WC)		3.45

3,500 ft/min 8 ft/s 0.2319

Length	2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		12	
Pipe Length (ft)		450	
Flow (SCFM)		210	
Fluid Velocity (ft/min)		399.26	< 3,5
Fluid Velocity (ft/s)		6.65	< 58
Pressure Loss/m (kPa/m)		0.0002	< 0.2
Pressure Loss (in WC)		0.12	
Pressure Loss_sum (in WC)		3.57	

00 ft/min ft/s 313

	Length 2 (next closest to vacuum source)	
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		12
Pipe Length (ft)		1354
Flow (SCFM)		240
Fluid Velocity (ft/min)		456.13

< 3,500 ft/min

Fluid Velocity (ft/s)	7.60	< 58 ft/s
Pressure Loss/m (kPa/m)	0.0003	< 0.229
Pressure Loss (in WC)	0.46	
Pressure Loss_sum (in WC)	4.03	

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White Segment 9 - 4

**Standard Conditions** Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

Density:

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100	add equations Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance conditions
Local Barometric Pressure (psi)	14.7	SCFM defined at 68, 0%, 14.7 psi
		add "no fittings"

Length 1 (closest to vacuum source) Verify density Type of Pipe SDR\_17\_HDPE add "viscosity 50%50%" Pipe Size (in) Pipe Length (ft) 840 Flow (SCFM) 5134 Fluid Velocity (ft/min) 2,783.53 < 58 ft/s Fluid Velocity (ft/s) 46.39 < 0.2321 Pressure Loss/m (kPa/m) 0.0033 Pressure Loss (in WC) 3.41 Pressure Loss\_sum (in WC) 3.41

< 3,500 ft/min

Length 2 (next closest to vacuum source) Type of Pipe SDR 17 HDPE Pipe Size (in) 18 4751 Pipe Length (ft) Flow (SCFM) 2025 Fluid Velocity (ft/min) 1,932.00 Fluid Velocity (ft/s) **32.20** < 58 ft/s Pressure Loss/m (kPa/m) 0.0024 Pressure Loss (in WC) 14.03 Pressure Loss\_sum (in WC)

< 3,500 ft/min < 0.1622

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity <  $^{\sim}$ 3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

Equations Used: Darcy-Weisbach

Colebrook-White **Segment: 18-19** 

Standard Conditions Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

Density:

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

SCFM is assumed with Standard Conditions

Site Conditions			
System Vacuum (in WC)	50	1	
Fluid Temp (F)	100	add equations	Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance con	ditions
Local Barometric Pressure (psi)	14.7	SCFM defined a	at 68, 0%, 14.7 psi

Length 1 (closest to vacuum source)

Type of Pipe
Pipe Size (in)
Pipe Length (ft)
Flow (SCFM)

Add "no fittings"

Verify density
add "viscosity 50%50%"

709

Flow (SCFM)

 Fluid Velocity (ft/min)
 2,783.53
 < 3,500 ft/min</td>

 Fluid Velocity (ft/s)
 46.39
 < 58 ft/s</td>

 Pressure Loss/m (kPa/m)
 0.0033
 < 0.2348</td>

 Pressure Loss (in WC)
 2.88

 Pressure Loss\_sum (in WC)
 2.88

Length 2	? (next closest to vacuum source)		]
Type of Pipe	SDR_17_HDPE		1
Pipe Size (in)		24	
Pipe Length (ft)		906	
Flow (SCFM)		3990	
Fluid Velocity (ft/min)		2,144.64	< 3,500 ft/min
Fluid Velocity (ft/s)		35.74	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0021	< 0.2233
Pressure Loss (in WC)		2.29	1
Pressure Loss_sum (in WC)		5.17	

Length 2 (no	ext closest to vacuum source)		]
Type of Pipe	SDR_17_HDPE		1
Pipe Size (in)		18	
Pipe Length (ft)		1815	
Flow (SCFM)		1430	
Fluid Velocity (ft/min)		1,357.17	< 3,500 ft/min
Fluid Velocity (ft/s)		22.62	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0013	< 0.2092
Pressure Loss (in WC)		2.84	1
Pressure Loss_sum (in WC)		8.01	1

Length 2 (next closest to vacuum source)			
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		12	
Pipe Length (ft)		669	
Flow (SCFM)		905	
Fluid Velocity (ft/min)		1,697.47	< 3,50

< 3,500 ft/min

Fluid Velocity (ft/s)	28.29	< 58 ft/s
Pressure Loss/m (kPa/m)	0.0029	< 0.1974
Pressure Loss (in WC)	2.37	
Pressure Loss_sum (in WC)	10.38	

Length 2	(next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		8	
Pipe Length (ft)		657	
Flow (SCFM)		501	
Fluid Velocity (ft/min)		2,039.46	< 3,500 ft/mi
Fluid Velocity (ft/s)		33.99	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0065	< 0.1716
Pressure Loss (in WC)		5.19	
Pressure Loss_sum (in WC)		15.56	

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** 

Darcy-Weisbach

Colebrook-White Segment 12 - 18

Assumptions **Standard Conditions** Temperature: 68 Relative Humidity: 0%

Density:

Barometric Pressure: 14.7 psi Viscosity based off 50%CH4 + 50%CO2.

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100 a	dd equations Darcy, colebrook-white
Fluid Relative Humidity (%)	100% re	efereance conditions
Local Barometric Pressure (psi)	14.7 S	CFM defined at 68, 0%, 14.7 psi
	a	dd "no fittings"

Length 1 (closest to vacuum source) Verify density SDR\_17\_HDPE Type of Pipe add "viscosity 50%50%" Pipe Size (in) 709 Pipe Length (ft) Flow (SCFM) 5134 Fluid Velocity (ft/min) 2,783.53 Fluid Velocity (ft/s) Pressure Loss/m (kPa/m) 0.0033 Pressure Loss (in WC) 2.88 Pressure Loss\_sum (in WC) 2.88

< 3,500 ft/min < 58 ft/s < 0.2348

Length 2 (n	ext closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		24	
Pipe Length (ft)		906	
Flow (SCFM)		3990	
Fluid Velocity (ft/min)		2,144.64	< 3,500 ft/min
Fluid Velocity (ft/s)		35.74	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0021	< 0.2233
Pressure Loss (in WC)		2.29	
Pressure Loss_sum (in WC)		5.17	

Length 2 (no	ext closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		1815	
Flow (SCFM)		1430	
Fluid Velocity (ft/min)		1,357.17	< 3,500 ft/min
Fluid Velocity (ft/s)		22.62	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0013	< 0.2092
Pressure Loss (in WC)		2.84	
Pressure Loss_sum (in WC)		8.01	

Le	ngth 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		12	
Pipe Length (ft)		669	
Flow (SCFM)		905	
Fluid Velocity (ft/min)		1,697.47	< 3,500 ft,

Fluid Velocity (ft/s)	28.29	< 58 ft/s
Pressure Loss/m (kPa/m)	0.0029	< 0.1974
Pressure Loss (in WC)	2.37	
Pressure Loss_sum (in WC)	10.38	

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity <  $^{\sim}$ 3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

Equations Used: Darcy-Weisbach Colebrook-White

Segment: 11 - 12

Assumptions
Standard Conditions
Temperature: 68
Relative Humidity: 0%
Barometric Pressure: 14.7 psi

Viscosity based off 50%CH4 + 50%CO2.

Density:

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100	add equations Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance conditions
Local Barometric Pressure (psi)	14.7	SCFM defined at 68, 0%, 14.7 psi
		add "no fittings"

Leng	th 1 (closest to vacuum source)		Verify density
Type of Pipe	SDR_17_HDPE		add "viscosity 50%50%"
Pipe Size (in)		24	
Pipe Length (ft)		709	
Flow (SCFM)		5134	
Fluid Velocity (ft/min)		2,783.53	< 3,500 ft/min
Fluid Velocity (ft/s)		46.39	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0033	< 0.2348
Pressure Loss (in WC)		2.88	
Pressure Loss_sum (in WC)		2.88	

Length 2 (n	ext closest to vacuum source)		1
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		24	
Pipe Length (ft)		906	
Flow (SCFM)		3990	
Fluid Velocity (ft/min)		2,144.64	< 3,500 ft/min
Fluid Velocity (ft/s)		35.74	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0021	< 0.2233
Pressure Loss (in WC)		2.29	
Pressure Loss_sum (in WC)		5.17	

Length 2 (n	ext closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		1815	
Flow (SCFM)		1430	
Fluid Velocity (ft/min)		1,357.17	< 3,500 ft/min
Fluid Velocity (ft/s)		22.62	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0013	< 0.2092
Pressure Loss (in WC)		2.84	

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White Segment 2 - 16

Pipe Length (ft)

SCFM is assumed with Standard Conditions

Assumptions

Viscosity based off 50%CH4 + 50%CO2.

**Standard Conditions** 

Barometric Pressure: 14.7 psi

Temperature: 68 Relative Humidity: 0%

Density:

Site Conditions			
System Vacuum (in WC)	50		
Fluid Temp (F)	100	add equations	Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance con	ditions
Local Barometric Pressure (psi)	14.7	SCFM defined a	at 68, 0%, 14.7 psi

add "no fittings" Verify density

2851

Length 1 (closest to vacuum source) SDR\_17\_HDPE Type of Pipe add "viscosity 50%50%" Pipe Size (in) 24

Flow (SCFM) 3026 Fluid Velocity (ft/min) 1,640.62 < 3,500 ft/min < 58 ft/s Fluid Velocity (ft/s) 27.34

< 0.2269 Pressure Loss/m (kPa/m) 0.0013 Pressure Loss (in WC) 4.44 Pressure Loss\_sum (in WC) 4.44

Length 2	(next closest to vacuum source)	
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		24
Pipe Length (ft)		1873
Flow (SCFM)		1645
Fluid Velocity (ft/min)		880.06
Fluid Velocity (ft/s)		14.67
Pressure Loss/m (kPa/m)		0.0004
Pressure Loss (in WC)		0.95
Pressure Loss_sum (in WC)		5.40

	< 3,500 ft/min
	< 58 ft/s
1	< 0.2222
1	

Length 2	(next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		3370	
Flow (SCFM)		1345	
Fluid Velocity (ft/min)		1,275.64	< 3,500
Fluid Velocity (ft/s)		21.26	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0011	< 0.198
Pressure Loss (in WC)		4.72	
Pressure Loss_sum (in WC)		10.11	

ft/min 37

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White Segment 2 - 4

**Standard Conditions** Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

Density:

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

SCFM is assumed with Standard Conditions

Site Conditions	
System Vacuum (in WC)	50
Fluid Temp (F)	100 add equations Darcy, colebrook-whit
Fluid Relative Humidity (%)	100% refereance conditions
Local Barometric Pressure (psi)	14.7 SCFM defined at 68, 0%, 14.7 psi
	add "no fittings"

Length 1 (closest to vacuum source) Verify density SDR\_17\_HDPE Type of Pipe Pipe Size (in) 24 Pipe Length (ft) 2851 Flow (SCFM) 3026 Fluid Velocity (ft/min) Fluid Velocity (ft/s) 27.34 Pressure Loss/m (kPa/m) Pressure Loss (in WC) 4.44 Pressure Loss\_sum (in WC) 4.44

add "viscosity 50%50%" **1,640.62** < 3,500 ft/min < 58 ft/s **0.0013** < 0.2269

Length 2 (r	next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		1
Pipe Size (in)		24	
Pipe Length (ft)		1873	
Flow (SCFM)		1645	
Fluid Velocity (ft/min)		880.06	< 3,500 ft/min
Fluid Velocity (ft/s)		14.67	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0004	< 0.2222
Pressure Loss (in WC)		0.95	1
Pressure Loss_sum (in WC)		5.40	1

Length 2 (n	ext closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		3944	
Flow (SCFM)		1255	
Fluid Velocity (ft/min)		1,190.28	< 3,500 ft/n
Fluid Velocity (ft/s)		19.84	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0010	< 0.1979
Pressure Loss (in WC)		4.88	
Pressure Loss_sum (in WC)		10.27	

min

Assumptions

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30

m/s

Relative Humidity: 0%

**Standard Conditions** 

Temperature: 68

Barometric Pressure: 14.7 psi

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of Viscosity based off 50%CH4 + 50%CO2.

line pressure

Density:

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach Colebrook-White

SCFM is assumed with Standard Conditions

Segment: 1 - 2

**Site Conditions** System Vacuum (in WC) 50 Fluid Temp (F) Fluid Relative Humidity (%) Local Barometric Pressure (psi)

100 add equations Darcy, colebrook-white

100% refereance conditions

14.7 SCFM defined at 68, 0%, 14.7 psi

add "no fittings"

Length 1 (closest to vacuum source)	
Type of Pipe	SDR_17_HDPE
Pipe Size (in)	24
Pipe Length (ft)	2851
Flow (SCFM)	3026
Fluid Velocity (ft/min)	1,640.62
Fluid Velocity (ft/s)	27.34
Pressure Loss/m (kPa/m)	0.0013
Pressure Loss (in WC)	4.44
Pressure Loss_sum (in WC)	4.44

Verify density add "viscosity 50%50%"

< 3,500 ft/min < 58 ft/s < 0.2269

Length 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		24
Pipe Length (ft)		1873
Flow (SCFM)		1645
Fluid Velocity (ft/min)		880.06
Fluid Velocity (ft/s)		14.67
Pressure Loss/m (kPa/m)		0.0004
Pressure Loss (in WC)		0.95
Pressure Loss_sum (in WC)		5.40

< 3,500 ft/min < 58 ft/s < 0.2222

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** 

Darcy-Weisbach Colebrook-White

Segment 11 - 4

Assumptions

**Standard Conditions** Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

Viscosity based off 50%CH4 + 50%CO2.

Density:

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100	add equations Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance conditions
Local Barometric Pressure (psi)	14.7	SCFM defined at 68, 0%, 14.7 psi
		add "no fittings"

erify density dd "viscosity 50%50%"

Length 1 (closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		24
Pipe Length (ft)		709
Flow (SCFM)		5134
Fluid Velocity (ft/min)		2,783.53
Fluid Velocity (ft/s)		46.39
Pressure Loss/m (kPa/m)		0.0033
Pressure Loss (in WC)		2.88
Pressure Loss_sum (in WC)		2.88

3,500 ft/min 58 ft/s < 0.2348

Length 2 (ı	next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		24	
Pipe Length (ft)		906	
Flow (SCFM)		3690	
Fluid Velocity (ft/min)		1,983.39	< 3,500 ft/mi
Fluid Velocity (ft/s)		33.06	< 58 ft/s
Pressure Loss/m (kPa/m)		0.0018	< 0.2248
Pressure Loss (in WC)		1.99	
Pressure Loss_sum (in WC)		4.87	

nin

Length 2	(next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE		
Pipe Size (in)		18	
Pipe Length (ft)		2145	
Flow (SCFM)		238	
Fluid Velocity (ft/min)		226.08	< 3,500
Fluid Velocity (ft/s)		3.77	< 58 ft/
Pressure Loss/m (kPa/m)		0.0001	< 0.22
Pressure Loss (in WC)		0.14	
Pressure Loss_sum (in WC)		5.00	

0 ft/min /s 42

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White Segment 9 - 13

**Standard Conditions** Temperature: 68 Relative Humidity: 0%

Barometric Pressure: 14.7 psi

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

Density:

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100 add equ	ations Darcy, colebrook-white
Fluid Relative Humidity (%)	100% referear	nce conditions
Local Barometric Pressure (psi)	14.7 SCFM de	efined at 68, 0%, 14.7 psi
	add "no	fittings"

Length 1 (closest to vacuum source) Verify density SDR\_17\_HDPE Type of Pipe add "viscosity 50%50%" Pipe Size (in) Pipe Length (ft) 840 Flow (SCFM) 5134 Fluid Velocity (ft/min) Fluid Velocity (ft/s) **0.0033** < 0.2321 Pressure Loss/m (kPa/m) Pressure Loss (in WC) 3.41 Pressure Loss\_sum (in WC) 3.41

**2,783.53** < 3,500 ft/min < 58 ft/s

Length 2 (next closest to vacuum source)		
Type of Pipe	SDR_17_HDPE	
Pipe Size (in)		12
Pipe Length (ft)		1165
Flow (SCFM)		1515
Fluid Velocity (ft/min)		2,880.73
Fluid Velocity (ft/s)		48.01
Pressure Loss/m (kPa/m)		0.0075
Pressure Loss (in WC)		10.69
Pressure Loss_sum (in WC)		14.09

< 3,500 ft/min 58 ft/s

< 0.1789

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach

Colebrook-White **Segment 10 - 11** 

**Standard Conditions** Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

Density:

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

SCFM is assumed with Standard Conditions

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100	add equations Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance conditions
Local Barometric Pressure (psi)	14.7	SCFM defined at 68, 0%, 14.7 psi
		add "no fittings"

Length 1 (closest to vacuum source) Verify density Type of Pipe SDR\_17\_HDPE add "viscosity 50%50%" Pipe Size (in) Pipe Length (ft) 709 Flow (SCFM) 5134 Fluid Velocity (ft/min) 2,783.53 Fluid Velocity (ft/s) 46.39 < 0.2348 Pressure Loss/m (kPa/m) 0.0033 Pressure Loss (in WC) 2.88 Pressure Loss\_sum (in WC) 2.88

< 3,500 ft/min < 58 ft/s

Length 2 (next closest to vacuum source) Type of Pipe SDR 17 HDPE Pipe Size (in) 24 Pipe Length (ft) 906 Flow (SCFM) 3690 Fluid Velocity (ft/min) 1,983.39 Fluid Velocity (ft/s) **33.06** < 58 ft/s Pressure Loss/m (kPa/m) 0.0018 Pressure Loss (in WC) 1.99 Pressure Loss\_sum (in WC)

< 3,500 ft/min < 0.2248

#### **LFG Header Pressure Loss Calculations**

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach Colebrook-White Segment: B - 1

Temperature: 68 Relative Humidity: 0% Barometric Pressure: 14.7 psi

**Standard Conditions** 

Density:

Viscosity based off 50%CH4 + 50%CO2.

Assumptions

SCFM is assumed with Standard Conditions

Site Conditions			
System Vacuum (in WC)	50	1	
Fluid Temp (F)	100	add equations	Darcy, colebrook-white
Fluid Relative Humidity (%)	100%	refereance con	ditions
Local Barometric Pressure (psi)	14.7	SCFM defined a	nt 68, 0%, 14.7 psi

add "no fittings" Verify density add "viscosity 50%50%"

Length 1 (closest to vacuum source)			
Type of Pipe	SDR_17_HDPE	3	
Pipe Size (in)		24	
Pipe Length (ft)		709	
Flow (SCFM)		5134	
Fluid Velocity (ft/min)		2,783.53	
Fluid Velocity (ft/s)		46.39	
Pressure Loss/m (kPa/m)		0.0033	
Pressure Loss (in WC)		2.88	
Pressure Loss_sum (in WC)		2.88	

< 3,500 ft/min < 58 ft/s < 0.2348

#### **LFG Header Pressure Loss Calculations**

1. Input data into green text cells

2. LFG 'Rule of Thumb': Fluid Velocity < ~3,500 ft/min

3. Gases and Vapors General 'Rule of Thumb': Fluid Velocity < 15-30 m/s

4. Gases and Vapors General 'Rule of Thumb': kPa/m < 0.02 percent of line pressure

\*Fittings are not incorperated in this program\*

**Equations Used:** Darcy-Weisbach Colebrook-White

Pressure Loss\_sum (in WC)

Segment: A - 1

SCFM is assumed with Standard Conditions

Assumptions

Viscosity based off 50%CH4 + 50%CO2.

**Standard Conditions** 

Barometric Pressure: 14.7 psi

Temperature: 68 Relative Humidity: 0%

Density:

Site Conditions		
System Vacuum (in WC)	50	
Fluid Temp (F)	100	add equations D
Fluid Relative Humidity (%)	100%	refereance condi
Local Barometric Pressure (psi)	14.7	SCFM defined at
		add "no fittings"

Length 1 (closest to vacuum source) Type of Pipe SDR\_17\_HDPE Pipe Size (in) 24 Pipe Length (ft) 2851 Flow (SCFM) 3026 Fluid Velocity (ft/min) **27.34** < 58 ft/s Fluid Velocity (ft/s) Pressure Loss/m (kPa/m) 0.0013 < 0.2269 Pressure Loss (in WC) 4.44

tions Darcy, colebrook-white

ce conditions

fined at 68, 0%, 14.7 psi

Verify density add "viscosity 50%50%"

**1,640.62** < 3,500 ft/min

4.44

Exhibit 39 Page 182 of 249



Coffin Butte Landfill Corvallis, Oregon 2021 GCCS Design Plan Location: Project:

How to use program:

1. Input length of solid pipe. (Min 20 feet)

Select a Permeability Ratio.
 Select the type of grade if near a slope, or flat surface.

4. Selete type of Landfill Conditions, or Select "User Input" if the conditions are known.

Assumptions:

-Verticle Well located at the edge of slope (if a slope is used).

-The location of the pressure is a foot away from the center of the pipe and assuming, the edge of the ROI is zero. Pressure at well head would need to be slightly higher than the one

The drawing on the right will automatically update as inputs are calculated. This gives a basic visual representation of what is happening inside of the landfill.

Pipe Condition	ns		
Length of Solid Pipe (ft)	20	MIN. 20 ft	
Length of Perferated Pipe (ft)	60		
Permeability Ratio	4:1 (Average)		
Slope of Grade	3:1 (Typical)		
Landfill Condition	ons		
Waste Type	Higher Density	Values based o	n Selected Waste Type
G <sub>M</sub> (User Input Only) (ft³/lb·yr)		$G_M$	0.1
ρ <sub>w</sub> (User Input Only) (lb/yd <sup>3</sup> )		$\rho_{\text{w}}$	2000
K (User Input Only) (cm/sec)		K	0.0005
Max Radius of Inflo	uence		
Max Radius of Influence (ft)	48.0		
Vacuum Pressure Needed	to obtain ROI		
Vacuum Pressure (in WC)	-0.72		

Definitions:

G<sub>M</sub> = LFG generation rate per unit mass


 $\rho_{\text{w}} = \text{Waste Density}$ 

K = Horizontal or radial landfill permeability with respect to LFG
If user is unsure about these values or conditions of the landfill, use the

typical value where needed. Equation Used:

$$\Delta \Psi = \frac{1}{3} \frac{G_{M} \rho_{W}}{K} (R_{l}^{2} \ln R_{l} - \frac{1}{2} R_{l}^{2} + \frac{1}{2})$$

 $\Delta\Psi$  = Vacuum Headed

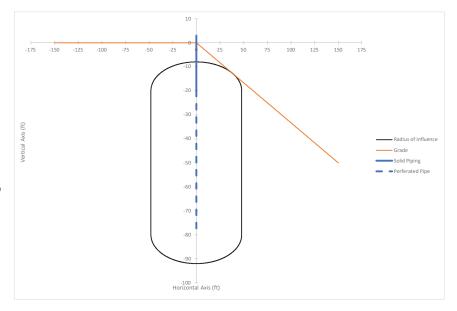

Coffin Butte Landfill Corvallis, Oregon 2021 GCCS Design Plan Location: Project:

How to use program:

1. Input length of solid pipe. (Min 20 feet)

Select a Permeability Ratio.
 Select the type of grade if near a slope, or flat surface.

4. Selete type of Landfill Conditions, or Select "User Input" if the conditions are known.

Assumptions:

-Verticle Well located at the edge of slope (if a slope is used).

-The location of the pressure is a foot away from the center of the pipe and assuming, the edge of the ROI is zero. Pressure at well head would need to be slightly higher than the one

The drawing on the right will automatically update as inputs are calculated. This gives a basic visual representation of what is happening inside of the landfill.

Pipe Condition	ns		
Length of Solid Pipe (ft)	20	MIN. 20 ft	
Length of Perferated Pipe (ft)	60		
Permeability Ratio	4:1 (Average)		
Slope of Grade	10:1 (Slight Slope)		
Landfill Condition	ons		
Waste Type	Higher Density	Values based or	Selected Waste Type
G <sub>M</sub> (User Input Only) (ft <sup>3</sup> /lb·yr)		$G_M$	0.1
ρ <sub>w</sub> (User Input Only) (lb/yd³)		$\rho_{\text{w}}$	2000
K (User Input Only) (cm/sec)		K	0.0005
Max Radius of Influ	uence		
Max Radius of Influence (ft)	74.3		
Vacuum Pressure Needed	to obtain ROI		
Vacuum Pressure (in WC)	-1.96		



G<sub>M</sub> = LFG generation rate per unit mass


 $\rho_{\text{w}} = \text{Waste Density}$ 

K = Horizontal or radial landfill permeability with respect to LFG
If user is unsure about these values or conditions of the landfill, use the

typical value where needed. Equation Used:

 $\Delta \Psi = \frac{1}{3} \frac{G_M \rho_W}{K} (R_l^2 \ln R_l - \frac{1}{2} R_l^2 + \frac{1}{2})$ 

 $\Delta\Psi$  = Vacuum Headed

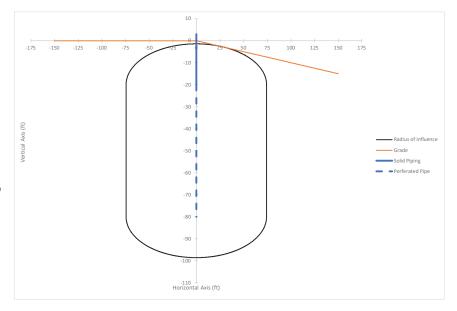

Coffin Butte Landfill Corvallis, Oregon 2021 GCCS Design Plan Location: Project:

How to use program:

1. Input length of solid pipe. (Min 20 feet)

Select a Permeability Ratio.
 Select the type of grade if near a slope, or flat surface.

4. Selete type of Landfill Conditions, or Select "User Input" if the conditions are known.


Assumptions:

-Verticle Well located at the edge of slope (if a slope is used).

-The location of the pressure is a foot away from the center of the pipe and assuming, the edge of the ROI is zero. Pressure at well head would need to be slightly higher than the one

The drawing on the right will automatically update as inputs are calculated. This gives a basic visual representation of what is happening inside of the landfill.

Pipe Condition	ns		
Length of Solid Pipe (ft)	20	MIN. 20 ft	
Length of Perferated Pipe (ft)	60		
Permeability Ratio	4:1 (Average)		
Slope of Grade	4:1 (Gradual)		
Landfill Condition	ons		
Waste Type	Higher Density	Values based on	Selected Waste Type
G <sub>M</sub> (User Input Only) (ft <sup>3</sup> /lb·yr)		$G_M$	0.1
ρ <sub>w</sub> (User Input Only) (Ib/yd <sup>3</sup> )		$\rho_{\text{w}}$	2000
K (User Input Only) (cm/sec)		K	0.0005
Max Radius of Influ	ience		
Max Radius of Influence (ft)	56.6		
Vacuum Pressure Needed	to obtain ROI		



Definitions:

G<sub>M</sub> = LFG generation rate per unit mass


 $\rho_{\text{w}} = \text{Waste Density}$ 

K = Horizontal or radial landfill permeability with respect to LFG
If user is unsure about these values or conditions of the landfill, use the

typical value where needed. Equation Used:

 $\Delta \Psi = \frac{1}{3} \frac{G_M \rho_W}{K} (R_l^2 \ln R_l - \frac{1}{2} R_l^2 + \frac{1}{2})$ 

 $\Delta\Psi$  = Vacuum Headed

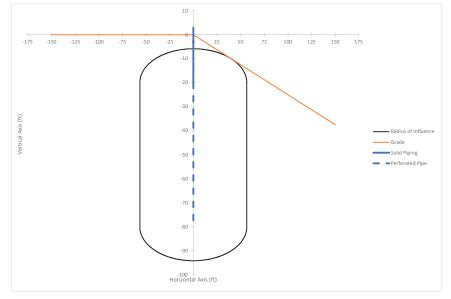

Coffin Butte Landfill Corvallis, Oregon 2021 GCCS Design Plan Location: Project:

How to use program:

1. Input length of solid pipe. (Min 20 feet)

Select a Permeability Ratio.
 Select the type of grade if near a slope, or flat surface.

4. Selete type of Landfill Conditions, or Select "User Input" if the conditions are known.

Assumptions:

-Verticle Well located at the edge of slope (if a slope is used).

-The location of the pressure is a foot away from the center of the pipe and assuming, the edge of the ROI is zero. Pressure at well head would need to be slightly higher than the one

The drawing on the right will automatically update as inputs are calculated. This gives a basic visual representation of what is happening inside of the landfill.

Pipe Condition	ns		
Length of Solid Pipe (ft)	20	MIN. 20 ft	
Length of Perferated Pipe (ft)	60		
Permeability Ratio	4:1 (Average)		
Slope of Grade	1:0 (Flat)		
Landfill Condition	ons		
Waste Type	Higher Density	Values based of	on Selected Waste Type
G <sub>M</sub> (User Input Only) (ft <sup>3</sup> /lb·yr)		$G_M$	0.1
ρ <sub>w</sub> (User Input Only) (lb/yd <sup>3</sup> )		$\rho_{\text{w}}$	2000
K (User Input Only) (cm/sec)		K	0.0005
Max Radius of Infl	uence		
Max Radius of Influence (ft)	80.0		
Vacuum Pressure Needed	to obtain ROI		
Vacuum Pressure (in WC)	-2.32		

Definitions:

 $G_M$  = LFG generation rate per unit mass


 $\rho_{\text{w}} = \text{Waste Density}$ 


K = Horizontal or radial landfill permeability with respect to LFG
If user is unsure about these values or conditions of the landfill, use the

typical value where needed. Equation Used:

 $\Delta \Psi = \frac{1}{3} \frac{G_M \rho_W}{K} (R_l^2 \ln R_l - \frac{1}{2} R_l^2 + \frac{1}{2})$ 

 $\Delta\Psi$  = Vacuum Headed

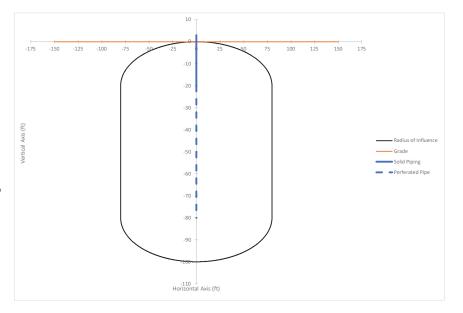



## **ESI Air Compressor System Sizing Calculator**

Project: Coffin Butte Landfill Date: 4/5/2021

Input value

Calculated value

Selected Equpiment

Assumptions: 1) All wells that have pumps cycle similutaneously.

2) The QED AP4.5 Ultra pump is used in all wells with 1" I.D. discharge pipe.

3) Average well depth is modeled as 120 ft.

#### **Calculations**

Description	Value	Notes
Air Usage (scf/gal)	1.1	From QED AP4.5 Ultra Specification Sheet
Liquid Discharge rate (gpm)	5	Based on typical usage (pump cycles at ~40% capacity)
System Air Pressure (psig)	100	Pressure that will be used to operate the pumps
Air Flow Req. per Pump (scfm)	5.5	See Equation 1
Percent of Wells with Pumps	70%	
Compressor Used	Sullair 370	09VB Series

#### Results

Years from Present	# of Wells <sup>A</sup>	Air Flow Req. <sup>B</sup> (SCFM)	Air Flow Req. @ 100 psig <sup>c</sup> (ACFM)	Capacity of wells pumped simultaneously
5	110	424	62	100%
10	130	501	74	100%
15	160	616	91	100%

<sup>&</sup>lt;sup>A</sup> Values from the 2016 GCCS Master Plan and 2020 5-year plan. Includes only vertical wells.

## **Equations**

Equation 1 
$$\left(\frac{SCF}{gal}/pump\right) * \left(\frac{gal}{min}\right) = SCFM/Pump$$

Equation 2 
$$\left(\frac{SCFM}{Pump}\right) * # of wells = SCFM req.$$

Equation 3 SCFM req.\* 
$$\left(\frac{14.7}{100}\right)$$
 = ACFM req.


<sup>&</sup>lt;sup>B</sup> See Equation 2


<sup>&</sup>lt;sup>c</sup> See Equation 3


## **Preferred Equipment - Reference Values**

<b>Compressor Options</b>	Installed HP	ACFM (@100 psig)	Max Pressure (psig)
Sullair ST2208	30	127	175
Sullair 3709VB Series	50	225	210


## **QED AP4+ Pneumatic Pump Curves**

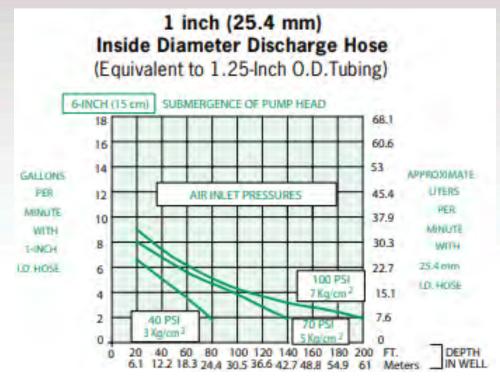


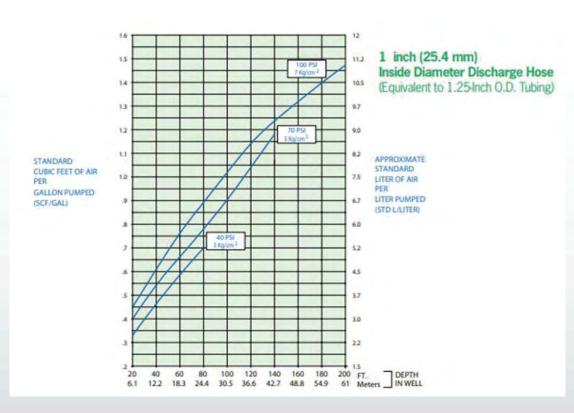





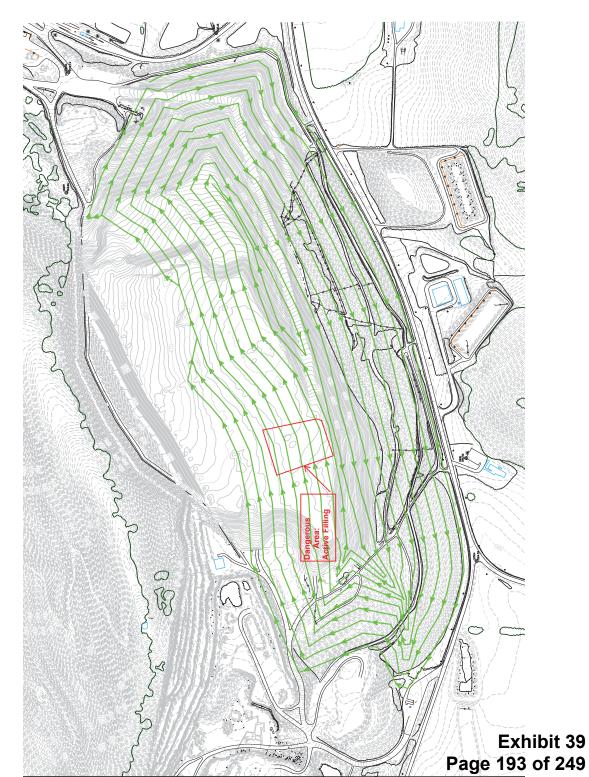



#### E ALTERNATIVES TO THE NSPS

§60.752(b)(2)(i)(B) The collection and control system design plan shall include any alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, record keeping or reporting provisions of §60.753 through §60.758 proposed by the owner or operator.

Per 40 CFR §60.752(b)(2)(i)(B), the design plan includes proposed alternatives to the operational standards, test methods, procedures, compliance measures, monitoring, recordkeeping, and reporting provisions of §60.753 through §60.758 of the NSPS. This section addresses exemptions/alternatives proposed in this submittal. All of these alternatives are acceptable to and have previously been approved by the USEPA for municipal solid waste landfills in areas of the United States.

# E.1 Exclude Steep Slopes and Dangerous Areas from Surface Scan Monitoring Requirements

§60.753(d) Operational Standards: "A surface monitoring design plan shall be developed that includes a topographical map with the monitoring route and the rationale for any site-specific deviations from the thirty meter intervals. Areas with steep slopes or other dangerous areas may be excluded from the surface testing."

The Coffin Butte Landfill is proposing to widen the spacing between intervals from 30-meters to 60-meters in areas that have a geomembrane final cover system placed. The geomembrane cover is expected to provide an excellent barrier to surface emissions, to be demonstrated by routine surface emissions monitoring conducted at the facility. The facility proposes to demonstrate this to the Oregon Department of Environmental Quality (ODEQ) by conducting surface scans initially using a 30-meter spacing. Upon demonstration that the geomembrane-covered areas are compliant for three consecutive quarters, the facility petitions to widen the spacing to 60-meters in these areas.

The facility also proposes to exclude dangerous areas such as roads, the active fill area, truck traffic areas, construction areas, areas with snow or ice cover, and slopes steeper than or equal to 5:1 from surface testing.

## E.2 Determination of Oxygen Levels at LFG Monitoring Points

§60.753(c)(2) Operational Standards: "Unless an alternative test method is established as allowed by § 60.752(b)(2)(i) of this subpart, the oxygen shall be determined by an oxygen meter using Method 3A or 3C..."

When applicable, the Coffin Butte Landfill is proposing to use an on-site multi-gas analyzer, in lieu of a laboratory method, for determining the oxygen content of the

landfill gas at each well and monitoring point. The site will be using a portable meter, such as a Landtec GEM-500 or equivalent, calibrated to the manufacturer's specifications, to determine the oxygen content of the gas.

# E.3 Operation of Passive Wells Installed in Areas Outside of Condition 13.4

Coffin Butte Landfill requested alternative operation of the passive wells installed in areas outside of condition 13.4, Oregon Title V Operation Permit number 02-9502. This request was approved in June 9, 2006 by ODEQ. The attached request letter and approval letter can be found following this appendix.

### E.4 Surface Emissions Monitoring Correction Variance

§60.755(c)(4): "Any reading of 500 ppm or more...shall be recorded as a monitored exceedance...cover maintenance or adjustments to the vacuum....shall be made and the location shall be remonitored within 10 calendar days after detecting the exceedance..."

Coffin Butte Landfill is proposing for the Landfill that a variance to the 10 day window be allotted for adjustments to the cover and/or collection system. Industry experience with facilities suggests that this 10 day time frame is not reasonable to effect comprehensive repairs during all quarters of a typical year. For example, if the Landfill experiences a precipitation event following a surface scan, it may take several days or even weeks for the side slopes of the landfill to dry out enough to support construction equipment for cover repairs. If the side slopes are not sufficiently dry, the repair equipment can cause more damage to the cover (and subsequently higher emissions) than the original erosion or crack.

Poor weather conditions can prevent cover maintenance, leading the follow-up rescans 10 days later to automatically fail. This can ultimately force the installation of an unneeded extraction well, when all that was really required was enough time to make a cover repair.

Coffin Butte Landfill is therefore requesting that the 10 day rescan time frame be extended by an additional two weeks, in the event of adverse weather conditions after a quarterly surface scan (should it be determined that the cover was the cause of the failing reading). Coffin Butte Landfill is proposing to receive this two week extension automatically, upon providing written notification to the ODEQ that the extra time is needed due to adverse weather conditions. Coffin Butte Landfill will place the notification letter in the NSPS files, along with a summary of the adverse weather conditions or other condition creating the need for additional time.

## E.5 Monitoring and New/Extended Extraction Wells

§60.756: "Except as provided in  $\S60.752(b)(2)(i)(B)$ , (a) Each owner or operator seeking to comply with  $\S60.752(b)(2)(ii)(A)$  for an

active gas collection system shall install a sampling port and a thermometer or other temperature measuring device at each wellhead and:

- (1) Measure the gauge pressure in the gas collection header on a monthly basis as provided in §60.755(a)(3); and
- (2) Monitor nitrogen or oxygen concentration in the landfill gas on a monthly basis as provided in §60.755(a)(5); and
- (3) Monitor temperature of the landfill gas on a monthly basis as provided in \$60.755(a)(5)."

New vertical LFG extraction wells are often placed in the active area of the landfill several years before the waste has reached final grades. This is in compliance with the NSPS. However, since the wells are placed in active areas, they periodically need to be "raised" (i.e., the well casing extended 15 to 25 feet vertically) in order to not be buried under later lifts of waste. When they are raised, the HDPE lateral line which provides the applied vacuum is temporarily disconnected until the surrounding lift of trash is brought high enough to reconnect the well. The time frame between when a well is disconnected and raised, and when the waste height is high enough to reconnect the lateral, can often range from a few weeks to a few months. This can result in missed monthly readings at the well, since the well casing is too high for the technician to safely reach.

Since the NSPS allows for exclusion of surface monitoring in "dangerous areas" of the site, Coffin Butte Landfill believes it is reasonable to request exclusion to monitoring the wells raised in active areas. The facility proposes that readings will be missed at a particular well as long as the well cannot be safely accessed. If the facility cannot bring the waste height up to the new grade and re-attach the well within a reasonable amount of time (4 months), then modifications to the lateral/wellhead, such as lowering the wellhead monitoring equipment, will be made for monitoring purposes. This request is in accordance with §60.752(b)(2)(i)(B), which allows the facility to propose alternatives to the monitoring procedures in the NSPS.

## E.6 Start-Up of New Wells or Collection System

§60.755(a)(4) does not require the landfill to expand the well field due to positive pressure within the first 180 days of system operation. During the first 180 days of collection and control system operations, where oxygen and/or temperature exceedances are monitored, Coffin Butte Landfill proposes to apply all applicable corrective measures to achieve the operating standards with the following exception: expansion of the collection system to address the exceedances within 120 days. In addition, for new individual wells installed at the Landfill, Coffin Butte Landfill proposes to not expand the well field during the first 180 days of operation for any individual well in which pressure, temperature and/or either oxygen exceedances are monitored.

### E.7 Monitoring of New or Replacement Extraction Wells

GCCSs are typically built in phases to accommodate for sequential waste placement as well as to replace various wells from time to time due to damage from settlement, etc. Installation of only a few additional wells can cause challenges with balancing the entire GCCS and therefore additional time may be needed to not only achieve negative pressure in all wells but to also maintain the operating standard for oxygen and/or temperature.

Per §60.755(a)(4), Coffin Butte Landfill is not required to expand the system during the first 180 days after GCCS start-up where pressure exceedances were recorded at one or more wells. SWANA recommends that, given the well field balancing challenges, USEPA should clarify that the exemption from system expansion applies to any individual well or series of wells associated with the new well(s) upon start-up.

<u>USEPA Response</u>: Request approval for alternative timeline procedure as part of the Design Plan or amendment to the Design Plan.

Pursuant to this response from the USEPA, Coffin Butte Landfill proposes to bring new and replacement wells into compliance within 180 days of installation. During this time period, the extraction wells will be monitored, however they will not be subject to the operational and monitoring constraints under §60.753.

### E.8 Monitoring of Interim LFG Collectors

SWANA has requested clarification from the USEPA as to whether additional wells or collectors, voluntarily established by the landfill operator, but not specified by the Gas Collection and Control System (GCCS) Design Plan, are subject to NSPS Operational Requirements.

This issue frequently arises when "extra" collectors are added or the leachate collection system is connected to the GCCS to control odors, to increase the quantity of LFG available for beneficial use, or to meet other landfill operating needs beyond regulatory compliance with the rule. Since a professional engineer certified that the GCCS Design Plan would meet the required level of LFG control without the use of the "extra" collectors and the Administrator approved the Design Plan, SWANA does not believe that the operating requirements should be beyond that required by the NSPS rule. Further, because these devices are installed for purposes other than to meet the requirements of the NSPS rule (i.e., odor control, energy recovery projects, etc), their design may preclude their ability to meet the stipulated operation requirements.

An example of this situation is when the leachate collection system is connected to the GCCS for odor mitigation purposes. Because the leachate collection layer extends close to the landfill surface and during initial cell development portions may even be exposed directly to air, a large amount of air can be drawn directly through the leachate system causing elevated oxygen concentrations at the wellhead. In this situation it is often impossible to limit the oxygen concentration to less than the regulatory standard of 5 percent. This, however, does not cause an operational problem as the air never moves through the waste and therefore does not increase the risk of a subsurface fire.

Another example is when LFG is collected from the leachate collection system and the leachate level rises above the perforated portion of the leachate collection riser pipe. In this situation, LFG does not move through the riser and an unrepresentative but elevated oxygen concentration can be measured if a small quantity of air accidentally enters the top of the riser.

Yet a third example is where a landfill owner or operator decides to install and operate wells in areas not yet required to have collection (i.e., initial waste placed is less than 5 years old in active fill area). There is no obligation to collect the LFG and therefore, there should be no monitoring requirements for these wells until the age of the initial waste requires such operation.

Although the NSPS rules may allow for regulatory approval of alternative oxygen standards to resolve some of theses issues, regulatory agencies have been extremely reluctant to grant such alternatives due to unfamiliarity with LFG control technology. A simpler solution would be to clarify in guidance that additional voluntary wells on collectors may be excluded from the performance standards used for wells to establish NSPS compliance.

USEPA Response: If the collectors are located in an area of the landfill not yet required to have control (i.e., initial waste in place is not yet 2 years in closed or final grade area or 5 years old in active areas) then the monitoring and operational requirements would not apply. If however, the collectors are located in areas of the landfill which require gas control, then the collectors must be monitored and achieve operating limits for pressure, oxygen and temperature. Alternative monitoring procedures and/or operating parameters for these collectors may be requested as part of the Design Plan or addendum to the Design Plan.

Pursuant to this response from the USEPA, Coffin Butte Landfill proposes that all GCCS connections to leachate management structures or to interim LFG collectors located in an area of the landfill not yet required to have control (i.c., initial waste in place is not yet 2 years old in closed or final grade area or 5 years old in active areas) be excluded from the NSPS operating and monitoring requirements at the Landfill.

## E.9 Decommissioning LFG Collectors

Filling around LFG wells may lead to numerous vertical extensions of the vertical LFG collectors. With differential settlement that may occur with time, some vertical LFG wells may fail and cease to provide significant LFG flow. In this situation, LFG does not move through the LFG wellhead and an unrepresentative but elevated oxygen concentration can be measured if a small quantity of air accidentally enters the top of the LFG wellhead. As wells are documented to provide little or no LFG flow, the vertical wells will be decommissioned. Decommissioned wells will be documented in the site records and the semi-annual reports. No additional approval or documentation will be required to decommission wells. No future LFG wellhead monitoring will be conducted on decommissioned LFG wells. Should surface emissions or other NSPS requirements

warrant, replacement wells will be added in accordance with the NSPS to replace decommissioned wells.

The following steps will be taken when a well is decommissioned:

- Close valves;
- Disconnection of well from collection system (removal of flex hose, capping of header lateral, etc.);
- Once disconnected, monthly wellhead monitoring will not be performed on the well; and
- Physical abandonment (i.e., cut off wellhead below ground, cap and backfill). Physical abandonment may not be performed immediately following well disconnection. Timing of the physical abandonment of the well will depend on weather and landfill operating conditions or the potential for the well to recover sufficient LFG flows.

A decommissioned well may be reconnected to the system at a later date if LFG flows recover. This may be possible where a pinched well casing later shears allowing the now open pipe to extract LFG from the surrounding gravel pack. At this time monthly wellhead monitoring will be resumed.

#### E.10 Additional Alternatives

Coffin Butte Landfill may request additional Alternatives to the NSPS from the USEPA under a site-specific determination request. Alternatives that are subsequently approved by the USEPA will be submitted to the ODEQ as an amendment to this GCCS Design Plan.



Department of Environmental Quality

Western Region - Salem Office 750 Front St. NE, Ste. 120 Salem, OR 97301-1039 (503) 378-8240 (503) 378-3684 TTY

June 9, 2006

Clyde Moore, PE Farallon Consulting 320 3<sup>rd</sup> Ave. NE Issaquah, WA 98027

RE: AQ-Valley Landfills

Title V Permit 02-9502

Benton County

Operation of Passive Landfill Gas Wells

Dear Mr. Moore:

The Department has received and reviewed your letter of 6/7/06 regarding operation of the passive landfill gas wells at the Valley Landfills, Coffin Butte Landfill. The Department agrees with your assessment that these passive gas wells do not need to be operated in accordance with the requirements in permit conditions 13.8 and 13.9. Because these passive gas wells are not required under condition 13.4 of the permit, they do not have to meet the New Source Performance Subpart WWW requirements.

The Department commends Valley Landfills for its ongoing efforts to reduce odorous emissions from the landfill by installing gas collection systems well in advance of any rule requirements.

If you have any questions regarding this approval, please do not hesitate to call me at 503/378-8240, ext. 234.

Sincerely,

Gary Andes

Natural Resource Specialist

Ce: Brian May
Valley Landfills
28972 Coffin Butte Road
Corvallis, OR 97330

Melissa Green Valley Landfills 28972 Coffin Butte Road Corvallis, OR 97330





320 3rd Ave. N.E. Issaquah, WA 98027

> T: 425, 427,0061 F: 425, 427,0067

June 7, 2006

Mr. Gary Andes
Oregon Department of Environmental Quality
750 Front Street NE
Salem, Oregon 97301-1039

RE: REQUEST FOR APPROVAL OF CHANGE IN OPERATION OF PASSIVE WELLS INSTALLED IN AREAS OUTSIDE CONDITION 13.4, OREGON TITLE V OPERATING PERMIT NUMBER 02-9502 COFFIN BUTTE LANDFILL HIGHWAY 99 AND COFFIN BUTTE ROAD, CORVALLIS, OREGON FARALLON PN: 845-002

#### Dear Mr. Andes:

On behalf of Valley Landfills, Inc. (VLI), Farallon Consulting, L.L.C. (Farallon) is writing to request approval of special operation of landfill gas wells located outside the areas prescribed by Condition 13.4 of Title V Operating Permit Number 02-9502 for the Coffin Butte Landfill in Corvallis, Oregon, last updated October 27, 2004 (Operating Permit). The requested change applies to certain surface and near-surface horizontal landfill gas (LFG) collection wells and pertains to the following issues:


- Operating the LFG control system with negative pressure at each well-head;
- Maintaining nitrogen concentrations in the LFG to less than 20 percent at the well-head;
   and
- Maintaining oxygen concentrations in the LFG to less than 5 percent at the well-head.

The basis for the requested change is provided below. The requested change does not include a request for an increase in allowable emission rates for any pollutants. Rather, the requested change actually would result in collection of a greater amount of generated LFG.

VLI is attempting to prevent emission of LFG that could potentially cause problematic odors from all areas of the Coffin Butte Landfill. Initial steps to accomplish this goal included more aggressive installation of vertical LFG collection wells in 2003, and installation of deep horizontal LFG collection pipe wells in 2005. The deep horizontal perforated pipes are installed before additional lifts of solid waste are placed, and only the connector pipes extend to the new landfill surface.

VLI personnel frequently monitor the landfill surface for odors to assess whether additional collection facilities are needed. The monitoring conducted by VLI includes the portions of the landfill where LFG collection wells are not yet required by the Operating Permit, as specified in

G:Projects/345 Regional Disposal Col845002 Collin Butte Landfill/Correspondence/Var Request/Variance Rost for 550706 due





Permit Condition 13.4. In some cases, in areas where LFG collection wells are not required by Permit Condition 13.4, VLI would like to install passive LFG collection wells where monitoring has determined that one or more of the following limiting conditions make standard LFG well installations impractical:

- The solid waste depth is too shallow to install vertical LFG collection wells;
- Vertical LFG wells would be buried by additional solid waste layers within 6 months;
- Deep horizontal LFG collection pipes cannot be installed because overlaying solid waste has already been placed.


In locations outside the areas where LFG wells are required by Permit Condition 13.4 and where one or more of these limiting conditions exist, VLI is installing near-surface horizontal LFG collection perforated pipes in shallow trenches or on the surface of the landfill to collect LFG and to control odors. These collection pipes either will be surrounded by gravel and covered with soil, or will be covered with a temporary membrane cap. VLI refers to these near-surface LFG collection wells as "passive wells." The basic purpose of the passive wells is to collect LFG emissions and control odors in areas where control using other means is not practical.

The operation of passive wells will exhibit a very large LFG flow response to applied vacuum because the soil or a temporary membrane cap seal over the perforated collector pipes will be only partially effective. It will be impossible to develop any significant vacuum in the passive wells because of this weak seal. In addition, the passive wells do not create a vacuum within the underlying solid waste. Even a small applied vacuum in a passive well will draw a large flow, and has the potential to quickly draw excessive air into the collection pipe. Therefore, only a very mild vacuum, enough to produce adequate flow to collect LFG emissions from the landfill surface, would be applied to the passive wells. The mild vacuum applied typically will not be strong enough to be measured using standard LFG monitoring equipment.

Properly designed and maintained passive wells will not operate within some of the parameters required under the Operating Permit. Specifically, the following Operating Permit conditions would not be achievable for proper operation of the passive wells:

 Operating Permit Condition 13.8: "Operate the LFG control system with negative pressure at each well-head."

The intent of Condition 13.8 is to ensure that adequate LFG control system vacuum is available at every well-head, and that no LFG pressure builds up within the well in the solid waste. Vacuums at other landfills often are considered adequate with at least 10 inches of water column. The Coffin Butte LFG control system has an unusually strong vacuum of 35 inches of water column available throughout the well field; therefore, the adequacy of available vacuum is not in question. The passive wells are installed at or very near the top of the solid waste; therefore, properly designed and maintained passive wells will exhibit little, if any, vacuum, which may not be measurable.



## Compliance Summary of Landfill Gas Collection and Control System Design Plan

20			dilli das collection and control sy	Stern Besign rian
	Report	Report		
Regulatory	Section	Appendix		
Citation	References	References	Regulatory Requirement	Implementation Summary
			If a gas collection and control system which meets the requirements of	
			section (2) of this rule has not been installed, the owner or operator of a	
			landfill must submit a Design Plan to DEQ within one year of becoming	The GCCS at CBLF is an existing system that now is
OAR 340-239-0110(1)(a)	N/A		subject to this rule.	subject to this rule.
			If an owner or operator of a landfill is modifying an existing gas collection	
			and control system to meet the requirements of this division, the owner	
			or operator must submit an amended Design Plan to DEQ that includes	This are and add decision along over the charles of the DEO within
OAR 340-239-0110(1)(b)	1.1		any necessary updates or addenda, in accordance with OAR 340-239-0700(3)(j).	This amended design plan was submittied to DEQ within one year of CBLF becoming subject to this rule.
OAR 340-239-0110(1)(b)	1.1		0/00(3)(j).	one year of CBLF becoming subject to this rule.
			The Design Plan must be prepared and certified by a professional	
			engineer. The following issues must be addressed in the design: Depths	
			of solid waste, solid waste gas generation rates and flow characteristics,	
			cover properties, gas system expandability, leachate and condensate	
			management, accessibility, compatibility with filling operations,	
			integration with closure end use, air intrusion control, corrosion	This plan was prepared and certified by a registered
			resistance, fill settlement, resistance to the solid waste decomposition	Professional Engineer licensed in the state of Oregon.
			heat, and ability to isolate individual components or sections for repair or	The design considerations in Section 4 of this plan
OAR 340-239-0110(1)(c)(A)	1.3 & 4	A	troubleshooting without shutting down entire collection system.	address all requirements liste din this rule.
			The Design Plan must provide for the control of the collected gas through	The design plan meets all requirements pursuant to
			, , ,	OAR 340-239-0110(2). The Alternative monitoring and
			of OAR 340-239-0110(2) or an alternative method approved pursuant to	operation plan in Appendix G is in pursuant of OAR 340-
OAR 340-239-0110(1)(c)(B)	3, 4, 5, 6	A, B, C, D, E, F, G	OAR 340-239-0500.	239-0500.
			The Design Plan must include any proposed alternatives to the	
			requirements, justification for the need for any proposed alternatives,	
048 240 220 0110/1/-//5/	C 4	6	test methods, procedures, compliance measures, monitoring, and	The entirities A ONAR also were sensored by DEO is 2006
OAR 340-239-0110(1)(c)(D)	6.4	G	recordkeeping or reporting requirements pursuant to OAR 340-239-0500.	The exisiting AOMP plan was approved by DEQ in 2006.
			The Design Plan must include a description of potential mitigation	
			measures to be used to prevent the release of methane or other	
			pollutants into the atmosphere during the installation or preparation of	
			wells, piping, or other equipment; during repairs or the temporary	
			shutdown of gas collection system components; or, when solid waste is	CQA and operations follow the guidelines detailed in
OAR 340-239-0110(1)(c)(E)	6.2		to be excavated and moved.	Section 6.2 of this plan.
			For active landfills, the design plan must identify areas of the landfill that	There are currently no inactive areas at CBLF. Closed
OAR 340-239-0110(1)(c)(F)	6.3	Α	are closed or inactive.	areas are detailed on drawing M1.00

OAR 340-239-0110(1)(c)(G)	5, 6.1	A, B, C, F	The gas collection and control system must be designed to collect gas at an extraction rate to comply with the surface methane emission limits in OAR 340-239-0200, component leak standard in OAR 340-239-0600(2)(c), and be sufficient to meet all operational and performance standards in this division. The expected gas generation flow rate from the landfill must be calculated pursuant to OAR 340-239-0800(5).	The GCCS is sized to accommodate the maximum gas generation projected in the LandGEM. New protocols for SEM monitoring and leak standards are detailed in Section 6.1
OAR 340-239-0110(1)(c)(l)	4.8, 4.13.5, 4.13.6, 5.4, 6.1, 6.2	B, C, D, G	The gas collection and control system must be designed to maintain a negative pressure at all wellheads in the collection system without causing air infiltration, including any wellheads connected to the system as a result of expansion or excess surface emissions	LFG piping is sized to maintain at least 30" W.C. at maximum projected LFG generation. ROIs and perforations of wells are calculated and sized to mitigate air intrustion.
OAR 340-239-0110(1)(c)(H)	6.3	A	Any areas of the landfill that contain only asbestos-containing waste, or nondecomposable solid waste may be excluded from collection provided that the owner or operator submits documentation to DEQ containing the nature of the waste, date of deposition, location and amount of asbestos or non-decomposable solid waste deposited in the area. This documentation may be included as part of the Design Plan.  The density of wells, horizontal collectors, surface collectors, or other gas	Asbestos areas are detailed in GCCS layout drawings. Republic tracks waste composition at scale house and deposits asbestos-containing waste within designated areas only.
	3.1, 3.2, 3.3, 4.13.5,		extraction devices necessary to achieve compliance with section (2) of	Wells and collectors are placed according to ROI to
OAR 340-239-0110(1)(c)(J)	4.14.1	A, D	this rule.	ensure proper coverage of active areas.
OAR 340-239-0110(1)(d)	2.2, 2.3	A	The owner or operator of an active landfill must install and operate a gas collection and control system not later than 18 months after the date that the landfill is required to comply with this rule.	CBLF has an active GCCS system and currently meets all requirements with the expection of control devices that meet the requirements of OAR 340-239-0110(2)(c)(b). Republic is planning on fullfilling this requirement via the installation of new control devices prior to the 1/1/24 deadline.
OAR 340-239-0110(1)(e)	N/A	N/A	The owner or operator of a closed or inactive landfill must install and operate a gas collection and control system not later than 30 months after the date that the landfill is required to comply with this rule.	CBLF currently operates an active GCCS.
OAR 340-239-0110(1)(f)	4.4	А	The owner or operator of a controlled landfill must place each well or design component as specified in the approved Design Plan. Following initial construction, each new component must be installed no later than 60 days after the date on which the area controlled by the well is required to be controlled pursuant to this division.	All wells and design components are installed as specified in this design plan. New components are installed within 60 days of an area becoming controlled.
OAR 340-239-0110(1)(g)	2.1, 6		The owner or operator of a landfill must operate, maintain and expand the gas collection system in accordance with the procedures and schedules in the approved Design Plan.	Republic currently operates the landfill according to this design plan.
OAR 340-239-0110(2)(a)(A)	2.3	A	Route all collected gas to a gas control device or devices, and operate the gas collection and control system continuously except as provided in sections (4) and (5) of this rule.	All collected LFG will continue to be continuously diverted to the PNCG plant and/or the exisiting destruction devices except in the case of emergency shutdowns or required maintenance and expansions.

Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provided all documentation used to make the estimates. A separate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the emethane emissions estimate for the entire landfill, and all calculations, data and documentation used to perform the calculations must be submitted to DEQ. The methods provided in OAR 340-239-0110(2)(a)(h)  A 239-0800(5).  A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations must be situated with regard plan. Perforations are calculated and designed in such				1	
DAR 340-239-0110(2)(a)(c)  A 3, 4.14.1, 4.14.3,  A 5 degree and operate the gas collection system to minimize off-site and operations of subsurface gas in compliance with OAR chapter 340, divisions 093, 094, and 095.  In the event the collection or control system is imperable, the gas mover system shall be shut down and all values in the collection and control system is functioning as intended.  A 4.12, 6.6, 6.7  CAR 340-239-0110(2)(a)(c)  A 5 A (4.12, 6.6, 6.7  CAR 340-239-0110(2)(a)(f)  A 5 A (4.12, 6.6, 6.7  A (5.12)  A 5 A (5.12)  A 6.1 A (5.12)  A 6.1 A (6.12)  A 7 A (6.12)  A 7 A (6.12)  A 7 A (7.12)					•
Design and operate the gas collection system to minimize off-site and onstein imparation of subsurface gas in compliance with OAR chapter 340, divisions 993, 094, and 095.  In the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control system controlising to venting of the gas to the amount of the EFG blowers and the LFG inlet valve closes.  OAR 340-239-0110(2)(a)(f) 2.3 control system may be initiated and completed in a manner such that downthine is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downthine is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downthine is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downthine is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downthine is kept to a bottom and all sides in all areas in which gas is to be collected. The liners must be initiated and control system is the system in the part of the bottom and all sides in all areas in which gas is to be collected. The liners must be initiated and control system is designed associated and an analysis of the standard of the collection of the collection of the system must be initiated and control system is designed associated in the system is the system in the system in the part of the system is the system in the system in the system is the system in the system is the system in the system in the system in the system is the system in the system in the system is the system in the system in the system in the system is the system in the system is				Design and operate the gas collection system to draw all the gas toward	diverted to the PNCG plant and/or the exisiting
A3, 4,14,1,4,14,3, 6,1,6,2 A, F  divisions 93, 04, and 095.  In the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control of system controlled system system system downs and shall sales in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (ES) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DSC. If data on actual amounts and age that any action sust be submitted to DEQ. The methane emissions estimate to session at setting sustained and surface and sustained sustained and sustained sustained and sustained sus	OAR 340-239-0110(2)(a)(C)	2.3	A	the gas control device or devices.	destruction devices.
A, 4, 14, 1, 4, 14, 3, 6, 1, 6, 2  A, F  divisions 93, 04, and 055.  In the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control of system control of all excluded areas to see shown to control of all excluded areas to see shown to control of system control of all excluded areas can be shown to control, provided that the total of all excluded areas can be shown to control of system system downtine, operating the GCCS in sorting to system control of all excluded areas can be shown to control of system system downtine, operating the GCCS in sorting to system control of all excluded areas can be shown to control of all excluded areas and shown to control of all excluded areas and shown to control of all excluded areas and the system is intended.  Any area of the landfill may be excluded from control of all excluded and and system downtine, operating the system of the landfill. The amount,					
OAR 340-239-0110(2)(a)(E)  OAR 340-239-0110(2)(a)(E)  OAR 340-239-0110(2)(a)(E)  OAR 340-239-0110(2)(a)(E)  OAR 340-239-0110(2)(a)(E)  OAR 340-239-0110(2)(a)(E)  OAR 340-239-0110(2)(a)(F)  A 1.12, 6.6, 6.7  In the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control when the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system whise the properation.  OAR 340-239-0110(2)(a)(F)  A 1.12, 6.6, 6.7  Institute of the collection of control system with the collection and control system with the rest before and all sides in all areas in which gas is to be collected. The liners must be initiated and solds in all areas in which gas is to be collected. The liners must be incompleted in a manner such and the collection and control system with liners of the landfill owner of the landfill owner or operator must be compared to the membrane emissions from the landfill. The amount, location, and age of the material must be documented and provided all documentation used to make the estimates, a separate methane emissions estimate based on known information and provide all documentation used to make the estimates, a section proposed for exclusion, and the sum of all such sections must be compared to the membrane emissions estimate based on known information and provided all documentation used to make the estimates, a section proposed for exclusion, and the sum of all such sections must be compared to the membrane emissions estimate based for each section proposed for exclusion must be compared to the membrane emissions estimate on the collection section proposed for exclusion must be compared to the membrane emissions estimate on the section proposed for exclusion must be compared to the membrane emissions estimate to the collection section proposed for exclusion must be compared to the membrane emission estimate to the collection section proposed f				Design and operate the gas collection system to minimize off-site and on-	The GGC is designed to provide LFG collection to all
in the event the collection or control system is inoperable, the gas mover system shall be shut down and all valves in the collection and control system control system on control system on control system on the atmosphere shall be closed within one hour of the collection or control system most operating.  Efforts to repair the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system with the minimum, and the collection and control system with the returned to operation.  Install all passes collections systems with increason in the bottom and all sides in all areas in which gas is to be collected. The liners must be excluded in the collection and control system should be a stalled as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (35) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DCL. If data on actual amounts and ge is not available, the sandfill owner or operator must estimate based on known information and provided to DCL. If data on actual amounts and ge is not available, the sandfill owner or operator must estimate be compared to the methane emissions and provided to DCL. The substance is such as extensive proposed for exclusion, and the sum of all such sections must be compared to the methane emissions some such amounts and provided to DCL. The methane emissions from each section proposed for exclusion, and the sum of all such sections must be compared to the methane emissions some as the compared to the methane emissions some as the control proposed for exclusion, and the sum of all such sections must be compared to the methane emissions from each section proposed for exclusion, and the sum of all such proposed for exclusions must be compared to the methane emissions from each sectio		4.3, 4.14.1, 4.14.3,		site migration of subsurface gas in compliance with OAR chapter 340,	controlled areas. Surface emission testing is used to
system shall be shut down and all valves in the collection and control system contributing to venting of the gas to atmosphere shall be closed within one hour of the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be truined to operation.  Install all passive collection systems with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one persent (15%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DCD. If data amount of methane the stems as A separate methane emissions estimate must be made documented and provided to DCD. If data mental the stem of the stems are stems one emissions estimate must be made each section proposed for exclusion, and the sum of all such sections must be computed to the methane emissions estimate must be made each section proposed for exclusion must be computed using the methods provided in OAR 340-  OAR 340-239-0110(2)(a)(H)  6.3 A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, (Breglass, stalless steel, or other nonprouse corroload pinaned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collection must be perforance across the interded extent of control. Perforations must be britated with regard plan. Perforations are calculated and designed in such	OAR 340-239-0110(2)(a)(D)	6.1, 6.2	A, F	divisions 093, 094, and 095.	verify that the system is functioning as intended.
system shall be shut down and all valves in the collection and control system contributing to venting of the gas to atmosphere shall be closed within one hour of the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be truined to operation.  Install all passive collection systems with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one persent (15%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DCD. If data amount of methane the stems as A separate methane emissions estimate must be made documented and provided to DCD. If data mental the stem of the stems are stems one emissions estimate must be made each section proposed for exclusion, and the sum of all such sections must be computed to the methane emissions estimate must be made each section proposed for exclusion must be computed using the methods provided in OAR 340-  OAR 340-239-0110(2)(a)(H)  6.3 A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, (Breglass, stalless steel, or other nonprouse corroload pinaned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collection must be perforance across the interded extent of control. Perforations must be britated with regard plan. Perforations are calculated and designed in such					
system shall be shut down and all valves in the collection and control system contributing to venting of the gas to atmosphere shall be closed within one hour of the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be truined to operation.  Install all passive collection systems with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one persent (15%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DCD. If data amount of methane the stems as A separate methane emissions estimate must be made documented and provided to DCD. If data mental the stem of the stems are stems one emissions estimate must be made each section proposed for exclusion, and the sum of all such sections must be computed to the methane emissions estimate must be made each section proposed for exclusion must be computed using the methods provided in OAR 340-  OAR 340-239-0110(2)(a)(H)  6.3 A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, (Breglass, stalless steel, or other nonprouse corroload pinaned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collection must be perforance across the interded extent of control. Perforations must be britated with regard plan. Perforations are calculated and designed in such				In the event the collection or control system is inoperable, the gas mover	
System contributing to venting of the gas to the atmosphere shall be closed within one hour of the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be returned to operation.  Install all passive collection systems with inom the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DCB. If data on a ctual amounts estimate based on known information and provide all documentation used to make estimates. A separate methane emissions estimate based on known information and provide all documentation used to make estimates. A separate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the methane emissions estimate for the entire landfill, and all calculations, data and documentation used to make estimates. A separate methane emissions estimate for the entire landfill, and all calculations, data and documentation used to perform the calculations must be submitted to DCQ. The methane emissions from each section proposed for exclusion must be compared to the methane emissions estimate for the entire landfill, and all calculations, data and documentation used to make such perforance according to PCQ. In place the submitted to DCQ. The methane emissions from each section proposed for exclusion must be compared to the emitane emissions estimate for the entire landfill, and all calculations, data and documentation used to make estimates. The entir					If the flame is not detected at the flare, nower is cut to
closed within one hour of the collection or control system mot operating.  Efforts to repair the collection or control system must be initiated and completed in a manner such that downtine is kept to a minimum, and the collection and control system must be returned to operation.  Install all passive collection systems with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be intended to the total or sections if necessary to minimize system downtime, operating the GCCS in sections of necessary to minimize system downtime, operating the GCCS in the collection and control system must be returned to operation.  Install all passive collection systems with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEG. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provide all documentation used to perform the calculations, data and decimentation used to perform the calculations, data and documenta					The state of the s
Efforts to repair the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be initiated and completed in a manner such that downtime is kept to a minimum, and the collection and control system must be returned to operation.  Install all passive collection systems with so in the bottom and all sides in all areas in which gas is to be collected. The liners must be installed according to Subtitle D standards, which fulfill 40 C.F.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEU, if data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provide all documentation used to perform the estimates. As Paparte methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such section used to perform calculations, data and documentation used to perform the estimates. As Exparte methane emissions estimate must be compared to the methane emissions estimate must be compared to the methane emissions estimate for the entire landfill, and all calculations, data and documentation used to perform calculations must be compared to the methane emissions estimate for the entire landfill, and all calculations, data and documentation used to perform calculations with the control september of the entire landfill, and all calculations, satisfaction and provided in OAR 340 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other no noprous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand lanned overburden or traf	OAR 340 330 0110/3\/a\/E\	2.2			
Efforts to repair the collection or control system must be initiated and completed in a manner such that downtime is kept to a minimum, and shutdowns.  And 340-239-0110(2)(a)(f)  4.12, 6.6, 6.7    A   Save collection system is the returned to operation.	OAR 340-239-0110(2)(a)(E)	2.3		closed within one nour of the collection of control system not operating.	,
Care 340-239-0110(2)(a)(F)  4.12, 6.6, 6.7    Care 340-239-0110(2)(a)(F)					· · · · · · · · · · · · · · · · · · ·
DAR 340-239-0110(2)(a)(F)  4.12, 6.6, 6.7  Install all passive collection systems must be returned to operation.  Install all passive collection systems with liners on the bottom and all sides in all areas in which gas is to be collected. The liners must be according to Subtitle D standards, which fullfill 40 C.F. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (13%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provide all documentation used to make the estimates. A separate methane emissions estimate must be made for each section proposed for exclusion must be compared to the methane emissions estimate must be made for each section proposed for exclusion must be compared to the methane emissions estimate must be compared to the methane emissions settimate must be compared to the methane emissions settimate must be compared to the methane emissions settimate must be compared to the methane emissions from each section proposed for exclusion must be computed using the methods provided in OAR 340  OAR 340-239-0110(2)(a)(H)  6.3  A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HIPP) pipe, fiberglass, stainless steel, or other nonprovous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission from a migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extend					
Install all passive collection systems with liners on the bottom and all sides in all all passive collection. Systems with liners on the bottom and all sides in still all passive collection. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (15%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to D.F. If data on activation and provide all documentation used to make the estimates as parate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the methane emissions estimate has some section proposed for exclusion must be computed using the methods provided in OAR 340-239-0110(2)(a)(H)  6.3  A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PCVC), high density polychylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emisment forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emisment forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emisment forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emisment forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emis					
Sides in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. § 258.40.  Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (13%) of the total amount of methane emissions from the landfill.  The amount, location, and age of the material must be documented and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provide all documentation used to make the estimates. A separate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all sections must be compared to the methane emissions estimate for the entire landfill, and all calculations, data and documentation used to perform the calculations must be submitted to DEQ. The methane emissions from each section proposed for exclusion must be computed using the methods provided in OAR 340-239-0110(2)(a)(H)  6.3 A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PCV), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across.  Republic currently follows these sections of the design the intended extent of control. Perforations must be situated with regard plan. Perforations are calculated and designed in such	OAR 340-239-0110(2)(a)(F)	4.12, 6.6, 6.7		· · · · · · · · · · · · · · · · · · ·	
Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provided all documentation used to make the estimates. A separate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the submitted to DEQ. The methane emissions form the calculations, data and documentation used to perform the calculations must be submitted to DEQ. The methods provided in OAR 340-239-0110(2)(a)(h)  A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyvethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emison and migration standards. Collection devices such as wells and horizontal collectors must be performance across the intended extent of control. Perforations must be situated with regard plan. Perforations are calculated and designed in such				Install all passive collection systems with liners on the bottom and all	The current leachate control system is designed
Any area of the landfill may be excluded from control, provided that the total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator use stimate based on known information and provide all documentation used to make the estimates. A separate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the methane emissions estimate for the entire landfill, and all calculations, data and documentation used to perform the calculations must be submitted to DEQ. The methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusion must be compared to the methane emissions from each section proposed for exclusions and exclusions from each section proposed for exclusion exclusions and exclusions and migration standards. Collection devices such as well-and for exclusions and migration standards. Collection devices such as well-and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across Republic currently follows th				sides in all areas in which gas is to be collected. The liners must be	according to Subtitle D standards, which fullfill 40 C.F.R.
total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provide all documentation used to make the estimates. A separate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the methane emissions intensite for the entire landfill, and all calculations, data and documentation used to perform the calculations must be submitted to DEQ. The methane emissions from each section proposed for exclusion must be computed using the methods provided in OAR 340-239-0800(5).  OAR 340-239-0110(2)(a)(H)  6.3  A 239-0800(5).  The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases, withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations must be situated with regard plann. Perforations are calculated and designed in such	OAR 340-239-0110(2)(a)(G)	4.5	А	installed as required under 40 C.F.R. § 258.40.	§ 258.40.
The landfill gas extraction components must be constructed of polyvinyl chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations must be situated with regard plan. Perforations are calculated and designed in such	OAR 340-239-0110(2)(a)(H)	6.3	A	total of all excluded areas can be shown to contribute less than one percent (1%) of the total amount of methane emissions from the landfill. The amount, location, and age of the material must be documented and provided to DEQ. If data on actual amounts and age is not available, the landfill owner or operator must estimate based on known information and provide all documentation used to make the estimates. A separate methane emissions estimate must be made for each section proposed for exclusion, and the sum of all such sections must be compared to the methane emissions estimate for the entire landfill, and all calculations, data and documentation used to perform the calculations must be submitted to DEQ. The methane emissions from each section proposed for exclusion must be computed using the methods provided in OAR 340-	CBLF currenity has no inactive areas. Any future areas will be submitted for approval by DEQ as per OAR 340-239-0800(5).
chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across the intended extent of control. Perforations must be situated with regard plan. Perforations are calculated and designed in such	OAK 340-239-0110(2)(a)(H)	0.5	A	235-0800(3).	235-0800(3).
	OAR 340-239-0110(2)(a)(l)	4.13, 5.1, 5.3	A, D	chloride (PVC), high density polyethylene (HDPE) pipe, fiberglass, stainless steel, or other nonporous corrosion resistant material of suitable dimensions to: Convey projected amounts of gases; withstand installation, static, and settlement forces; and withstand planned overburden or traffic loads. The collection system must extend as necessary to comply with emission and migration standards. Collection devices such as wells and horizontal collectors must be perforated to allow gas entry without head loss sufficient to impair performance across	The state of the s

OAR 340-239-0110(2)(a)(J)	3.1, 3.2, 3.3.1, 4.14	A, D	Vertical wells must be placed so as not to endanger underlying liners and must address the occurrence of water within the landfill. Holes and trenches constructed for piped wells and horizontal collectors must be of sufficient cross-section so as to allow for their proper construction and completion including, for example, centering of pipes and placement of gravel backfill. Collection devices must be designed so as not to allow indirect short circuiting of air into the cover, into the solid waste, into the collection system, or gas into the air. Any gravel used around pipe perforations should be of a dimension so as not to penetrate or block perforations.	Republic currently operates according to these rules. Fullfillment of each item is found in section 4.14 and its subsections.
			Collection devices may be connected to the collection header pipes	
			below or above the landfill surface. The connector assembly must include	
			a positive closing throttle valve, any necessary seals and couplings, access	
			couplings and at least one sampling port. The collection devices must be	Donublic currently implements this approach in their
OAR 340-239-0110(2)(a)(K)	3.4, 4.15	А	constructed of PVC, HDPE, fiberglass, stainless steel, or other nonporous material of suitable thickness.	Republic currently implements this approach in their GCCS design.
OAR 340-239-0110(2)(a)(R)	3.4, 4.13	, A	inaterial of Sultable Unickriess.	The design engineer uses flow data from the PNCG
			For existing collection systems, the flow data must be used to project the	facility flowmeters at the generation plant and flares to
			maximum flow rate. If no flow data exists, the procedures in	compare to modeled projections generated by the EPA
OAR 340-239-0110(2)(a)(L)(i)	4.2, 5.2	В	subparagraph (2)(a)(L)(ii) of this rule must be used	LandGEM.
, A.A.	,-		For new collection systems, the maximum flow rate must be determined	
OAR 340-239-0110(2)(a)(L)(ii)	N/A	N/A	in accordance with OAR 340-239-0800(5).	CBLF has an existing GCCS.
			Requirements for Enclosed Flares. A landfill owner or operator who	
			operates an enclosed flare must route the collected gas to an enclosed	
OAR 340-239-0110(2)(b)	N/A	N/A	flare that meets all of the following requirements:	CBLF does not currently have enclosed flares.
			Requirements for open flares: A landfill owner or operator who operates	
			an open flare must route the collected gas to an open flare that meets	CBLF has two open flares, both of which comply with 40
OAR 340-239-0110(2)(c)	2.3		the requirements of 40 C.F.R. § 60.18.	C.F.R. § 60.18.
			(A) Install, calibrate, maintain, and operate the following equipment	
			according to the manufacturer's specifications: (i) A heat sensing device,	
			such as an ultraviolet beam sensor or thermocouple, at the pilot light or	
			the flame itself to indicate the continuous presence of a flame; and (ii) A	
			device that records flow to the flare and bypass of the flare (if	
			applicable). The owner or operator must: (I) Install, calibrate, and	
			maintain a gas flow rate measuring device that records the flow to the	
			control device at least every 15 minutes; and (II) Secure the bypass line	The existing flares have thermocouples, flowmeters,
			valve in the closed position with a car-seal or a lock-and-key type	and UV flame detectors that operate continuously.
			configuration. A visual inspection of the seal or closure mechanism must	Flowmeters are calibrated in accordance to
			be performed at least once every month to ensure that the valve is	manufactuer's specifications. A visual inspection of all
			maintained in the closed position and that the gas flow is not diverted	mechanisms is performed monthly. There are no bypass
OAR 340-239-0110(2)(c)(A)	2.3		through the bypass line.	lines around the control devices.

		1		
OAR 340-239-0110(2)(c)(B)	2.3		An open flare installed and operating prior to August 1, 2021, may operate until January 1, 2024, but is thereafter prohibited except as provided in paragraph (2)(c)(C) of this rule.	Both flares operating at CBLF were installed prior to 8/1/2021. They will be replaced by control devices that meet DEQ requirements before 1/1/24.
OAR 340-239-0110(2)(c)(C)	2.3		Operation of an open flare on or after January 1, 2024, is only allowed with DEQ's written approval, which DEQ will determine based on whether the owner or operator demonstrates to the satisfaction of DEQ that one of the following conditions apply: (i) The methane generation rate is less than 664 metric tons per year pursuant to OAR 340-239-800(2) and is insufficient to support the continuous operation of an enclosed flare or other gas control device; (ii) The owner or operator is seeking to temporarily operate an open flare during the repair or maintenance of the gas control system, or while awaiting the installation of an enclosed flare, or to address offsite gas migration issues. An owner seeking to temporarily operate an open flare under this subparagraph must submit a written request to DEQ pursuant to OAR 340-239-0500; (iii) The owner or operator has landfill gas emissions that are unable to be controlled using enclosed flare gas control devices in the gas control system. These emissions being controlled using an open flare may not exceed 664 metric tons (732 tons) per year of methane. An owner seeking to operate an open flare under this subparagraph must submit a written request to DEQ pursuant to OAR 340-239-0500. The request must include an analysis verifying that there is no feasible alternative control device configuration that would use the landfill gas emissions without use of an open flare; or (iv) The owner or operator otherwise has received written approval from DEQ to operate an open flare pursuant to OAR 340-239-0500.	Republic will replace the exisiting flares with control
OAR 340-239-0110(2)(d)(B)(i)	2.3		(B) Route the collected gas to an energy recovery device, or series of devices that meets all of the following requirements: (i) Achieves a methane destruction efficiency of at least 99 percent by weight pursuant to OAR 340-239-0800(6). Lean burn internal combustion engines must reduce the outlet methane concentration to less than 3,000 ppmv, dry basis, corrected to 15 percent oxygen.	CBLF diverts a majority of LFG generated to the PNCG power facility which uses lean burn internal combustion engines that meet these requirements. All remaining LFg is combusted by the flares.
OAR 340-239-0110(2)(d)(B)(ii)	2.3		For new gas control devices, the destruction efficiency or parts per million by volume required according to OAR 340-239-0110(2)(d)(A)(i) must be established by an initial performance test to be completed no later than 180 days after the initial startup of the approved control system using the test methods specified in OAR 340-239-0800(6) and the DEQ Source Test Manual.	New control equipment will be selected based off on manufactuer's specifications and emission reduction guarantees. Performance testing will be performed following the commissioning phase of new control devices using methods in the DEQ Source Test Manual within 180 days of startup.
OAR 340-239-0110(2)(d)(B)(iii)	2.3		Existing gas control devices must demonstrate compliance with this rule not later than 180 days from the effective date of this rule using the performance test methods specified in OAR 340-239-0800(6) and the DEQ Source Test Manual.	The current flares have a methane destruction effiency of 98 percent. They are to be replaced by new control devices that meet these requirements.


OAR 340-239-0110(2)(d)(B)(iv)	2.3			All control devices are currently operated according to this rule.
			Route the collected gas to a treatment system that processes the	
			collected gas for subsequent sale or use. Venting of treated landfill gas to	
			the ambient air is not allowed. If the treated landfill gas cannot be routed	
			for subsequent sale or beneficial use, then the treated landfill gas must	
			be controlled according to either subsection (2)(b), (2)(c) or (2)(d) of this	
			rule. All emissions vented to the atmosphere from the gas treatment system are subject to the requirements of subsection (2)(b) or (2)(c) of	
			this rule. The owner or operator must prepare a site-specific treatment	
			monitoring plan to include all of the following: (i) Monitoring records of	
			parameters that are identified in the treatment system monitoring plan	
			and that ensure the treatment system is operating properly for each	
			intended end use of the treated landfill gas. At a minimum, records must	
			include records of filtration, de-watering, and compression parameters.	
			14 (ii) Monitoring methods, frequencies, and operating ranges for each	
			monitored operating parameter based on manufacturer's	
			recommendations or engineering analysis for each intended end use of	
			the treated landfill gas. (iii) Documentation of the monitoring methods	
			and ranges, along with justification for their use. (iv) List of responsible staff (by name and job title) for data collection. (v) Processes and	
				CBLF does not ultilize a gas treatment system. All LFG
			, , , , ,	collected is diverted to the PNGC facility and/or the
OAR 340-239-0110(2)(d)(C)	N/A	N/A		flares.

			T	
OAR 340-239-0110(2)(d)(e)	N/A	N/A	The owner or operator complying with section (2)(d) of this rule by using a landfill gas treatment system must calibrate, maintain, and operate according to the manufacturer's specifications a device that records flow to the treatment system and bypass of the treatment system (if applicable). The owner or operator must maintain and operate all monitoring systems associated with the treatment system in accordance with the site-specific treatment system monitoring plan required by paragraph (2)(d)(C) of this rule. The owner or operator must: (A) Install, calibrate, and maintain a gas flow rate measuring device that records the flow to the treatment system at least every 15 minutes; (B) Install liners or equivalent non-permeable materials on the bottom and all sides in all areas in which gas is to be collected. The liners must be installed as required under 40 C.F.R. 258.40; and (C) Secure the bypass line valve in the closed position with a car-seal or a lock-and-key type configuration. A visual inspection of the seal or closure mechanism must be performed at least once every month to ensure that the valve is maintained in the closed position and that the gas flow is not diverted through the bypass line.	CBLF does not ultilize a gas treatment system. All LFG collected is diverted to the PNGC facility and/or the flares.
		,		
			Performance Test Requirements. The owner or operator must conduct annual performance tests for any gas control device(s) subject to the	
			requirements of section (2) of this rule using the test methods identified	Annual performance testing is performed on all
			in OAR 340-239-0800(6). Following an initial performance test, the owner or operator must conduct a complete annual performance test each	destruction devices annually. The current flares in operation do not meet the 99 percent methane
			calendar year, no later than 45 days after the anniversary date of the	destruction efficiency. New destruction devices that do
OAR 340-239-0110(2)(d)(f)	2.3		initial performance test. Performance tests must be conducted in compliance with all of the following requirements:	meet these requirements will be installed and operational prior to the 1/1/24 deadline.
OAR 340 233 0110(2)(d)(1)	2.3			operational prior to the 1/1/2+ dedunite.
			Wellhead sampling. A landfill owner or operator required to comply with section (2) of this rule for an active gas collection system must install a	
			sampling port and measuring devices, or an access port for measuring	
			devices, at each wellhead and comply with the following, using	
			measuring devices that meet the requirements of OAR 340-239- 0800(7):(a) Monitor nitrogen or oxygen concentration in the landfill gas	
			on a monthly basis as provided	
			in OAR 340-239-0600(3); (b) Monitor temperature of the landfill gas on a monthly basis as	All active wellheads have 3 sampling ports, a
			provided in OAR 340-239-	temperature port, and integrated flow devices. These
			0600(3); and	ports allow for temperature, oxygen, nitrogen,
			(c) Measure the gauge pressure in the gas collection header on a monthly basis as provided in	methane, gauge pressure and flow to be monitored and recorded. Current operations monitor each wellhead at
OAR 340-239-0110(3)	3.4, 6.5, 6.7	А	OAR 340-239-0600(2)(d).	minimum once monthly.

		Well Raising. The requirements of paragraph (2)(a)(A), paragraph (2)(a)(B), and section (3) of this rule do not apply to individual wells involved in well raising provided the following conditions are met: (a) New fill is being added or compacted in the immediate vicinity around the well; and (b) Once installed, a gas collection well extension is sealed	
OAR 340-239-0110(3)	6.6	or capped until the raised well is reconnected to a vacuum source.	Republic currently operates under this rule.
		Repairs and Temporary Shutdown of Gas Collection System Components: The requirements of paragraphs (2)(a)(A) and (2)(a)(B) do not apply to individual landfill gas collection system components that must be temporarily shut down in order to repair the components due to emergencies, catastrophic events such as earthquakes, to extinguish landfill fires, to prevent landfill fires, to connect new landfill gas collection system components to the existing system, to perform construction activities pursuant to OAR 340-239-0300, or to conduct performance testing, provided the following requirements are met: 16 (a) Any new gas collection system components required to maintain compliance with this division must be included in the most recent Design Plan pursuant to section (1) of this rule. The owner or operator must comply with applicable provisions of the Notice of Construction requirements in OAR chapter 340, division 210 and permit modification requirements in OAR chapter 340, division 216 or 218 prior to the construction, installation and operation of new landfill gas collection system components; (b) Methane emissions are minimized during shutdown pursuant to paragraph (1)(a)(E) of this rule; and (c) The owner or operator must submit a notification to DEQ after any temporary shutdown due to an emergency, catastrophic event or landfill fires in accordance with OAR	
OAR 340-239-0110(4)	6.2.1, 6.2.2	340-239- 0700(3)(n).	Republic currently operates under this rule.



## Oregon Landfill Gas Instantaneous Monitoring Flowchart

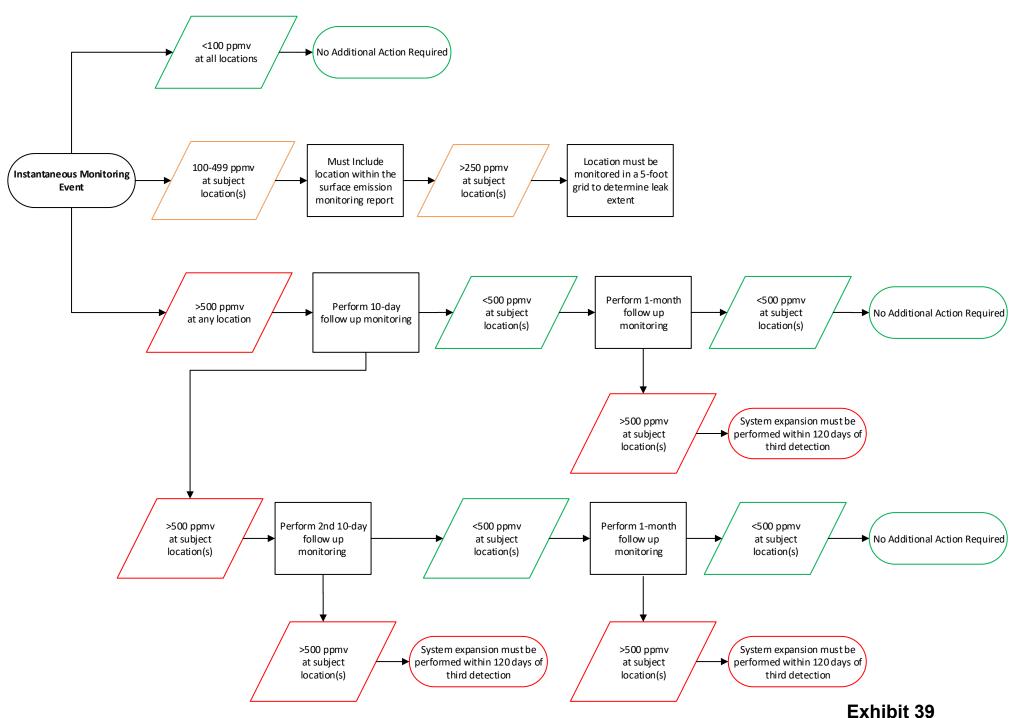

Page 214 of 249

## **Oregon Landfill Gas Integrated Monitoring Flowchart**

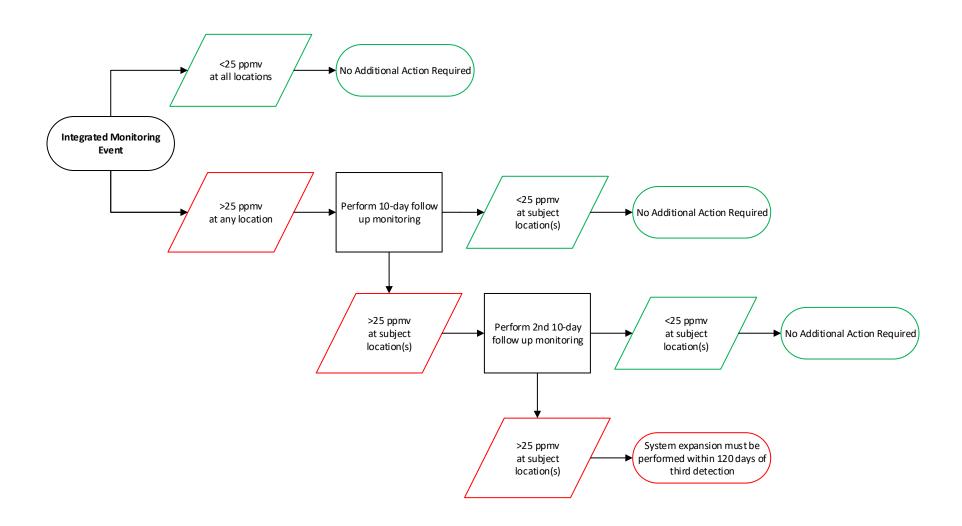




Table 1 - Instantaneous & Integrated Exceedances - Methane Surface Emissions

Part	<del></del>		LIIII33IUII3	- methalie Sulface	LACCEUALICES OF	antaneous & Integrated I	rante 1 - Insta				
Note in the control of the control o	Pressurized Pipin	Integrated Exceedances			Instantaneous Exceedances						
Notice   Product   Produ	(>500 ppmv)				(1						
Comment   Comm	Initial	-	-		Initial	-		1	1	Initial	Manitaring Daried
See a consistency of the second service of the second second service of the second service of the second service of the second second service of the second second service of the second second second service of the second	Initial 0	Requirea (₹/N)	_	_		1					_
ordicates, but the report of previous results of comparing permits with the continuous positions and the property of the comparison of the continuous positions are sometimed by the continuous permits without provided the continuous permits without provided the continuous permits without provided the continuous permits with the continuous permits without provided the continuous permits with the continuous permits and permits and the continuous permits with the continuous permits and permits and the continuous permits with the continuous permits and permits and the continuous permits and the co	1	T manitaring avantuas				IN IN	0	0	21	101	Q3 2022"
Statement control (control control control control (control control control control control (control control control control control control (control control											
And the procession of the process of		•				e 1-month re-	n the 2nd 10-day or th	mv were identified i	nces above 500 pp	No exceeda	
SIGN SPS returns the required first and second 10 day follows apmointering events were unable to be prefarmed due to execute 10 day follows apmointering events were unable to be prefarmed and executed 10 day follows apmointering events were unable to be prefarmed and executed 10 day follows apmointering events were unable to be prefarmed and executed 10 day follows apmointering events were unable to be prefarmed and executed 10 day follows apmointering events were unable to be prefarmed and executed 10 day follows apmointering events were unable to be prefarmed and executed 10 days follows apmointering events were unable to be prefarmed and executed 10 days follows apmointering events were unabled to be prefarmed and executed 10 days follows apmointering events were unabled to be prefarmed and executed 10 days follows apmointering events were unabled to be prefarmed and executed to the prefarmed due to event the profession of the scale of the prefarmed and executed to execute the control of the scale of the scale of the prefarmed and executed to event the profession of the scale of the prefarmed and executed to even the profession of the scale of the prefarmed and event the profession of the scale of the prefarmed and even the prefarmed and even the profession of the scale of the prefarmed and even the prefarmed	NA	·			_						Notes:
Notes potent adjust to be performed due to veraffer. States on these maintaining results with accordance with the DMR, with concentrations in concentration in concentration in the concentration in concentration in the c	0	Υ	See notes	See notes	23	N	NA	NA	0	18	Q4 2022*
Notes: Cystem algostramits and remorbiation by SCS and after personnel.  Q2 2023* 18 0 14 4 4 4 Y 19 13 13 11 Y  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Q2 2023* 18 0 14 4 4 Y 19 13 13 11 Y  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Q2 2023* 18 0 14 4 4 Y 19 13 13 11 Y  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Q2 2023* 18 0 14 4 4 Y 19 13 13 11 Y  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Assert Cystem algostramits and remorbiation by SCS and after personnel.  Q3 2023* 1 O NA O NA SCS and after personnel of the subject areas in Name 2023.  Q3 2023* 1 O NA O NA SCS and after personnel of the subject areas in Name 2023.  Q4 2023* 1 O NA O NA SCS and after personnel of the subject areas in Name 2023.  Q5 2023* 1 O NA O NA SCS and after personnel of the subject areas in Name 2023.  Q5 2023* 1 O NA SCS AND ASSERT	NA	these monitoring results ions in exceedance not ansion within 120-days of	o weather. Based on th initial concentrati rform a system expa e gas collection and	be performed due to se with the OMR, (wi site is required to pe red exceedance. The	were unable to with accordanc corrected) the s the third detect	nonitoring following					Notes:
Note: observed and purpose were identified in the first 10-day re-monitoring following concentrations in exceptionary controlls the fibility controlls the controlls the fibility controlls the controlls the fibility controlls the	0	Υ		· · ·		N	•	1			
Q2 2023*   18   14   4   4   4   Y   19   13   11   Y		s required to perform a d exceedance. The gas	with accordance wit corrected) the site is of the third detected	monitoring results in exceedance not of ion within 120-days	Based on these concentrations system expansi		n the first 10-day re-m	mv were identified i	nces above 500 pp	No exceeda	
Based on these monitoring results with accordance with the OMIA, (with initial concentrations in exceedance not corrected). The site is required to perform a system expansion with requirements for expansion and remodiation, the instantaneous locations in accordance with requirements for expansion and remodiation, the instantaneous locations are to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an attenuative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. The gas collection and control system was expanded in the surpress in June 2023.  Q3 2023**  1	NA 0	oject areas in March 2023.		ı		l v	ite personnel.				
Notes: In the subject areas in June 2023.  Q3 2023**  1		s required to perform a d exceedance. SCS-FS note only two (2) of the the 25 ppmv threshhold nitoring events; however, as and following grated monitoring results	corrected) the site is of the third detected ic error where they n ere reduced below 2nd 10-day re-mon es all measurement ats, eleven (11) integ	in exceedance not often within 120-days to have a typograph ated exceedances welletion of the 1st and attachment 4 providuoth monitoring even	concentrations system expansi report appears nineteen integrated following comp Table 2 within A completion of b	he rule (expansion of the OAR) within 120	in accordance with to option if approved by	urned to compliance	emediated and retu on system or an alte	need to be r	
Q3 2023* 1 0 NA 0 N 5 3 3 Y  Based on these monitoring results with accordance with the OMR, (with initial concentrations in exceedance not corrected) the site is required to perform a sollection and control system was expanded in the subject areas in March 2024.  Q4 2023* 5 3 2 2 Y  In accordance with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance or poton if approved by the OAR) within 120 days after the third integrated exceedance. The gas collection and control system was expanded in the subject area in September 2023.  Notes: Repartles in the subject area in September 2024.  Q1 2024* 11 9 8 8 4 1 1 Y  need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an atternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. SCS doesn't report results of the 1-month remonitoring event in the subject area in March 2024.  Q2 2024* PN	NA	ion and controt system	•	• •		ot system was expanded	collection and contit	_		=	Notes:
Notes: monitoring events following system adjustments and remediation by SCS and site personnel.  Q4 2023*  So a 2 Y 8 8 4 1 Y  in accordance with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance option if approved by the OAR) within 120 days after the third integrated exceedance. The gas sollection and control system was expanded in the subject area in September 2023.  Notes: expanded in the subject areas in March 2024.  Q1 2024*  Q1 2024*  Q2 2024* EPA conducted minital monitoring event the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the first 10-day re-monitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the first 10-day re-monitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the subject areas in March 2024.  Q2 2024* EPA conducted minital monitoring event with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance option if approved by the OAR) within 120 days after the third integrated exceedance. SCS doesn't report results of the 1-month remonitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the subject areas in March 2024.  Q2 2024* EPA conducted minital monitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the first 10-day re-monitoring event in the conducted in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the subject areas in March 2024.  Q2 2024* EPA conducted min	0	Υ				N	0			1	
In accordance with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance option if approved by the OAR) within 120 days after the third integrated exceedance. The gas collection and control system was expanded in the subject areas in March 2024.  Q1 2024*  Ill 9 8 See notes Y 4 0 NA NA N  need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an atternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. The gas collection and control system was expanded in the subject areas in March 2024.  Q1 2024*  Regardless, the gas collection and control system was expanded in the subject areas in March 2024.  Regardless, the gas collection and control system was expanded in the first 10-day re-monitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the subject areas in March 2024.  Q2 2024* EPA conducted the remonitoring events  In accordance with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an atternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. So system expansion or the collection system or an atternative compliance option if approved by the OAR) within 120 integrated data not prepared/available for the monitoring performed by the EPA in the collection system or an atternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. No system expansion or the collection system or an atternative compliance option if approved by the OAR) within 120 in the first 10-day re-monitoring performed by the EPA in the first 10-day re-monitoring performed by the EPA in the first 10-day re-monitoring performed by the EPA	NA	concentrations in exceedance not corrected) the site is required to perform a system expansion within 120-days of the third detected exceedance. The gas collection and control system was expanded in the subject area in September								Notes:	
need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. The gas collection and control system was sollection and control system was expanded in the subject areas in March 2024.  Q1 2024* 11 9 8 See notes Y 4 0 NA N  An ede to be remediated and returned to compliance option if approved by the OAR) within 120 days after the third integrated exceedance. SCS doesn't report results of the 1-month remonitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the subject areas in March 2024.  Q2 2024* EPA conducted the remonitoring event. SCS conducted the remonitoring event. SCS conducted the remonitoring event. SCS conducted the remonitoring sevent. SCS conducted the remonitoring sevent seven	0	Υ	1	4	8	Y	2	2	3	5	Q4 2023*
need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. SCS doesn't report results of the 1-month remonitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the subject areas in March Notes: 2024.  Q2 2024* EPA conducted weight of the remonitoring events. SCS conducted the remonitoring events and remediation, the instantaneous locations need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. No system expansion reported during Q2 2024, although system expansions were performed in the last month of Q1 2024 (March) and the last month of Q3 2024 (September).	NA 0	required to perform a d exceedance. The gas pject areas in March 2024.	corrected) the site is of the third detected expanded in the sub	in exceedance not of the interest of the inter	concentrations system expansi collection and o	he rule (expansion of the OAR) within 120 ol system was	e in accordance with the option if approved by sollection and contr	urned to compliance ernative compliance exceedance. The gain March 2024.	emediated and retu on system or an alte ne third integrated e n the subject areas i	need to be r the collection days after the expanded in	
the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. SCS doesn't report results of the 1-month remonitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted. Regardless, the gas collection and control system was expanded in the subject areas in March Notes: 2024.  Q2 2024* EPA conducted initial monitoring events. SCS conducted therefore, no additional monitoring was required for the quarter.  In accordance with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance option if approved by the OAR) within 120 days after the third integrated exceedance. No system expansion reported during Q2 2024, although system expansions were performed in the last month of Q3 2024 (September).  Q2 2024* SCS monitoring	†	1.11	INO		-	<u>'</u>					<u> </u>
EPA conducted initial monitoring event, SCS conducted the remonitoring event solution in accordance with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. No system expansion reported during Q2 2024, although system expansions were performed in the last month of Q1 2024 (March) and the last month of Q3 2024 (September).		the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. SCS doesn't report results of the 1-month remonitoring event in the subject quarterly report and it's unclear if/why it wasn't conducted.  Regardless, the gas collection and control system was expanded in the subject areas in March event following system adjustments and remediation by SCS and site personnel;									
In accordance with requirements for expansion and remediation, the instantaneous locations need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. No system expansion reported during Q2 2024, although system expansions were performed in the last month of Q1 2024 (March) and the last Motes: month of Q3 2024 (September).  Q2 2024* SCS monitoring											EPA conducted initial monitoring event, SCS conducted the re-
need to be remediated and returned to compliance in accordance with the rule (expansion of the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. No system expansion reported during Q2 2024, although system expansions were performed in the last month of Q1 2024 (March) and the last Motes: month of Q3 2024 (September).  Q2 2024* SCS monitoring	0			_		Y	1	1			nonitoring events
Q2 2024* SCS monitoring		PA	performed by the El	monitoring		he rule (expansion of the OAR) within 120 ed during Q2 2024,	in accordance with the option if approved by em expansion reporte	urned to compliance ernative compliance exceedance. No syst ere performed in the	remediated and retu on system or an alte ne third integrated e stem expansions w	need to be r the collection days after the although sys	Manage
SCS monitoring SCS monitoring	NA		ı					) <b>.</b>	o ZUZ4 (September)	month of Q3	
											_
	0	N	NA	0	3	Υ	15	15	15	22	· ·
In accordance with requirements for expansion and remediation, the instantaneous locations	1			-	-	tantaneous locations			_		<b>y</b>
need to be remediated and returned to compliance in accordance with the rule (expansion of						• •		· ·			
the collection system or an alternative compliance option if approved by the OAR) within 120 days after the third integrated exceedance. No system expansion reported during Q2 2024, although system expansions were performed in the last month of Q1 2024 (March) and the last Notes: month of Q3 2024 (September).  No exceedances above 25 ppmv were identified in the first 10-day re-monitoring event following system adjustments and remediation by SCS and site personnel; therefore, no additional monitoring was required for the quarter.		by SCS and site personnel;	s and remediation b	system adjustment	event following	ed during Q2 2024,	tem expansion report	exceedance. No sys ere performed in the	ne third integrated e stem expansions w	days after th although sys	

<sup>\*</sup> Quarterly report notes several grids were not monitored, in accordance with the OAR, due to active landfilling activities, unsafe conditions, overgrown vegetation, or no waste in place.



Table 2 – Roseburg Landfill & CBL – Methane Exceedance Comparison

Exhibit 39

Page 218 of 249

		Coffin Butte Landfill	Roseburg Landfill
	Instantaneous	39	19
<b>Total Measurements</b>	Instantaneous*	80	NA
	Integrated (# of Grids Monitored)	42	44
	Initial Instantaneous >500 ppmv	22	12
	Initial Instantaneous >500 ppmv*	63	NA
	% exceedance of instantaneous measurements	56.41%	63.16%
	% exceedance of instantaneous measurements*	78.75%	NA
	1st 10-Day Re-Monitoring Event >500 ppmv*	17	0
Exceedances	2nd 10-Day Re-Monitoring Event >500 ppmv*	16	N/A
	1-month Re-Monitoring Event*	16	N/A
	Integrated >25 ppmv	3	0
	1st 10-Day Re-Monitoring Event >25 ppmv	0	NA
	% exceedance of integrated grids	7.14%	0.00%

<sup>\*</sup> Includes EPA instantaneous readings collected at CBL. The EPA did not collect integrated measurements.



May 17, 2024 File No. 04217027.23

Mr. Nick Frisinger Roseburg Landfill 1036 SE Douglas Ave RM 308 Roseburg OR, 97470

Subject: Roseburg Landfill - Roseburg, Oregon

Surface Emissions Monitoring for the Second Quarter of 2024.

Dear Mr. Nick Frisinger,

SCS Field Services (SCS-FS) is pleased to provide the Douglas County Solid Waste Department with the enclosed report summarizing the surface emissions monitoring services performed by SCS-FS at Roseburg Landfill (Site) during the second quarter of 2024. This report includes the results of the surface scan, component emissions, and blower/flare station emissions monitoring for the Site.

SCS-FS appreciates the opportunity to be of assistance to Roseburg Landfill on this project. As you review the enclosed information, please contact Stephen Harquail at (503) 867-2369 or Max Polkabla at (510) 277-5122 if you have any questions or comments.

Sincerely,

Max Polkabla

Max Polkabla Senior Data Analyst SCS Field Services Stephen Harquail PNW Region Manager SCS Field Services

# Roseburg Landfill Oregon Landfill Gas Emissions Rule (OAR) and Surface Emissions Monitoring Second Quarter 2024

Presented to:

Nick Frisinger Douglas County Solid Waste Director 1036 SE Douglas Ave RM 308 Roseburg OR, 97470

## SCS FIELD SERVICES

File No. 04217027.23 | May 17, 2024

SCS FIELD SERVICES 15949 SW 72<sup>nd</sup> Ave Portland, Or 97224

**Exhibit 39 Page 222 of 249** 

### **Roseburg Landfill**

## Oregon Landfill Gas Emissions Rule (OAR) and Surface Emissions Monitoring Second Quarter 2024

#### INTRODUCTION

This letter provides the results of April 8, 9, 16, and May 8, 2024, OAR landfill surface emissions monitoring (SEM) performed by SCS Field Services (SCS) at the Roseburg Landfill. All work was performed in accordance with our approved Work Scope, and the OAR requirements.

#### SITE BACKGROUND

Roseburg Landfill began receiving waste in 1932 and was privately owned and operated until 1975. The County purchased the landfill in 1975 and has operated the facility since that time.

From 1932 until the 1960s, Roseburg Landfill was operated as a burning dump. Disposal operations proceeded past the current landfill entrance gate westward up the valley of the Main Fill. Additionally, some ash and unburnt waste disposal occurred in the area now occupied by the Lateral Expansion. In the late 1960s operations changed from burning to conventional waste disposal (e.g., landfilling). Waste disposal operations shifted to the main valley (now called the Main Fill). Between 1997 and 2000, the County constructed the Lateral Expansion that is adjacent to and hydraulically upgradient to cross-gradient of the Main Fill. The Lateral Expansion is approximately 20 acres and is constructed to Subtitle D standards and comprised of three lined cells: Cell 1, Cell 2, and Cell 3. Groundwater drainage systems were constructed beneath the Lateral Expansion that includes the GWC and SDS.

In 2000 and 2001, the County installed seven LFG extraction wells in the Main Fill, just south of the interface with the Lateral Expansion, and a candle stick flare southwest of PV-1. Before waste was placed in the Lateral Expansion, VOCs were detected in discharges from the GWC, SDS, and SLCS. After the LFG collection and control system (GCCS) was installed and operating, VOCs were either no longer detected or only sporadically detected in liquid samples from these locations. A private entity, Roseburg LFG Energy, LLC, operates and maintains the GCCS, which now consists of over 50 LFG extraction wells and a landfill gas-to-energy plant.

#### 2024 State Regulatory Applicability

Roseburg Landfill is subject to the Oregon-specific landfill gas emission regulations in OAR Chapter 340 Division 239. These SEM regulations are detailed below.

#### SURFACE EMISSION METHANE CONCENTRATION LIMITS

340-239-0200 (1) Surface Emission Methane Concentration Limits. Except as provided in OAR 340-239-0110(4), 340-239-0110(5), 340-239-0300, and 340-239-0600(1), beginning August 1, 2022, or upon commencing operation of a newly installed gas collection and control system or modification of an existing gas collection and control system pursuant to OAR 340-239-

0110(1), whichever is later, no location on the landfill surface may exceed either of the following methane concentration limits:

- (a) 500 ppmv, other than nonrepeatable, momentary readings, as determined by instantaneous surface emissions monitoring conducted in accordance with OAR 340-239-0800(3)(b);
- (b) An average methane concentration limit of 25 ppmv as determined by integrated surface emissions monitoring conducted in accordance with OAR 340-239-800(3)(c).

The 500 ppmv limit is already a requirement in the Federal (NESHAP) regulations above, but an average methane concentration limit of 25 ppmv will be adhered to as required.

#### SURFACE EMISSION RECORDKEEPING

340-239-0700(2)(a)(C) All instantaneous surface readings of 100 ppmv methane or greater. All exceedances of the limits in OAR 340-239-0100(6)(b) and 340-239-0200, including the location of the leak (or affected grid), leak concentration in ppmv methane, date and time of measurement, the action taken to repair the leak, date of repair, any required remonitoring and the remonitored concentration in ppmv methane, wind speed during surface sampling, and the installation date and location of each well installed as part of a gas collection system expansion;

In compliance with OAR, all emissions points 100 ppmv or over will be documented. All repeatable instantaneous records of 100 ppm or higher (taken during SEM) must be kept for 5 years AND recorded in the semi-annual reports.

#### **SUMMARY AND CONCLUSIONS**

As stipulated in OAR, if uncorrectable exceedances within the 10-day limitation are detected or emissions are discovered during an inspection by Regulatory Agencies, the landfill must perform monitoring on a 25-foot pathway on a quarterly basis for active disposal sites. Upon completion of four consecutive SEM events without an uncorrectable exceedance of the 25 ppmv or 500 ppmv standards, other than non-repeatable momentary readings, the landfill may perform the monitoring on a 100-foot spacing on an annual basis for closed landfills or quarterly for active disposal sites. In accordance with the provisions of the OAR, the monitoring of the Roseburg landfill was done on a 25-foot pathway based on no prior inspections provided.

On April 8, and 9, 2024, SCS performed second quarter 2024 surface emissions monitoring testing as required by the Oregon Landfill Gas Emission Rule. Instantaneous surface emissions monitoring results indicated that twelve (12) locations exceeded the 500 ppmv maximum concentration on the abovementioned dates (Table 1 in Attachment 3). The required first 10-day (OAR) monitoring indicated that all areas returned to below regulatory compliance limits following system adjustments and remediation by site personnel. Based on these monitoring results no additional follow-up testing was required.

Also, during the instantaneous monitoring event, SCS performed integrated monitoring of the landfill surface. As required by the OAR, the landfill was divided into 50,000 square foot areas. The Douglas County/Roseburg Landfill surface is divided into 54 grids, as shown in Figure 1 in Attachment 1. During this monitoring event, several grids were not monitored, in accordance with the regulations, due to ongoing active landfilling activities, unsafe conditions, or there was no waste in place prior to the monitoring event.

During the monitoring event, there were no areas observed to exceed the 25 ppmv OAR integrated average threshold (Table 2 in Attachment 4). These results are discussed in a subsequent section of this report.

In addition, quarterly monitoring of the pressurized piping or components of the Gas Collection and Control System (GCCS) under positive pressure must be performed quarterly. Results of the testing of the landfill gas (LFG) Blower Flare Station (BFS) pressurized pipe and components indicated that all test locations were in compliance with the 500 ppmv requirements.

Further, as required under the OAR, any location on the landfill that has an observed instantaneous methane concentration above 100 ppmv must be included within the surface emission monitoring report. If any instantaneous location records above 250 ppmv, it must be monitored in a 5-foot grid around the location to determine the extent of the methane leak. During this reporting period, six (6) locations were observed showing elevated concentrations between 100-499 ppmv, of the reporting threshold. When these readings are observed to be repeatable, they are reported to site personnel for tracking and/or remediation and will be reported in the next submittal of the annual OAR report. Finally, to help prevent potential future exceedances, SCS recommends that the landfill surface be routinely inspected and any observed surface erosion be routinely repaired.

#### SURFACE EMISSIONS MONITORING

On April 8, 9, 16, and May 8, 2024, the instantaneous and integrated SEM was performed over the surface of the subject site. The monitoring intended to identify any specific locations or areas of the landfill surface with organic compound concentrations exceeding the OAR threshold limit values of 500 ppmv measured as methane for instantaneous monitoring, or an average methane concentration of 25 ppmv for the integrated monitoring in the 50,000 square foot grids as required under the OAR. During this event, SCS performed the monitoring on a 25-foot pathway as required.

#### EMISSIONS TESTING INSTRUMENTATION/CALIBRATION

The instruments used to perform the landfill surface emission testing consisted of the following:

- Thermo Scientific TVA 2020 portable Flame Ionization Detector (FID). This instrument measures
  methane in the air over a range of 1 to 50,000 ppmv. The TVA 2020 meets the State of California
  Air Resources Board (CARB) requirements for combined instantaneous and integrated monitoring
  and was calibrated in accordance with the United States Environmental Protection Agency (US
  EPA) Method 21.
- Weather Anemometer with continuous recorder for meteorological conditions in accordance with the OAR.

Instrument calibration logs and weather information are shown in Attachments 5 and 6.

#### SURFACE EMISSIONS MONITORING PROCEDURES

Surface emissions monitoring was conducted in accordance with the OAR and SEM requirements. Monitoring was performed with the FID inlet held within 2 inches of the landfill surface while a technician walked a grid in parallel paths not more than 25 feet apart over the landfill's surface. Cracks, holes, and other cover penetrations in the surface were also tested. Surface emissions readings were monitored continuously and recorded every 5 seconds. Any areas exceeding the 100 or 500 ppmv standards

(reporting and compliance levels, respectively) would be GPS-tagged and stake-marked for on-site personnel to perform remediation or repairs.

The integrated average is based on the readings stored on the instrument, which are recorded every 5 seconds. The readings are then downloaded and the averages are calculated for each grid using SCS eTools®. All readings are maintained in this secure SCS Database. The readings are not provided in the report due to the volume of readings but can be furnished upon request.

Recorded wind speed results are shown in Attachment 6. Wind speed averages were observed to remain below the alternative threshold of 10 miles per hour, and no instantaneous speeds exceeded 20 miles per hour. No rainfall occurred within 72 hours of the monitoring events. Therefore, site meteorological conditions were within the alternatives of the OAR requirements on the above-mentioned dates.

#### **TESTING RESULTS**

During this event, SCS performed the monitoring on a 25-foot pathway as required under the OAR. The monitoring intended to identify any specific locations or areas of the landfill surface with organic compound concentrations exceeding the OAR or NSPS threshold limit values of 500 ppmv measured as methane for instantaneous monitoring, or an average methane concentration of 25 ppmv for the integrated monitoring (OAR).

On April 8, and 9, 2024, SCS performed the second quarter of 2024 instantaneous emissions monitoring testing as required by the Oregon DEQ/OAR. During this monitoring, surface emissions results indicated that twelve (12) locations exceeded the 500 ppmv maximum concentration. The required first 10-day (OAR) follow-up monitoring performed on April 16th, 2024, and the 1-month (OAR) follow-up monitoring event performed on May 8, 2024, indicated that all locations returned below compliance limits as required, following system adjustments and remediation by site personnel. Results of the initial and follow-up monitoring are shown in Attachment 3 (Table 1). Calibration logs for the monitoring equipment are provided in Attachment 5. Results of the monitoring are shown in Attachments 2 and 3 (Table 1).

During this monitoring event, several grids were not monitored, in accordance with the OAR, due to active landfilling activities, unsafe conditions, overgrown vegetation, or no waste in place. SCS will continue to monitor all accessible locations during the third quarter of 2024.

#### PRESSURIZED PIPE AND COMPONENT LEAK MONITORING

On April 9, 2024, quarterly leak monitoring was performed in accordance with the OAR. SCS performed LFG pressurized pipe and component leak monitoring at the BFS. Monitoring was performed with the detector inlet held one-half of an inch from the pressurized pipe and associated components. No locations exceeding the 500 ppmv threshold were observed during our monitoring event. The maximum reading, which was 5.00 ppmv, was well below the maximum threshold (see Table 1 for component results). Therefore, all pressurized pipes and components located at the LFG BFS were in compliance at the time of our testing.

#### PROJECT SCHEDULE

According to the OAR, surface emissions monitoring at active landfills is required to be performed on a quarterly basis. Therefore, in accordance with our approved Work Scope, the third quarter of 2024 surface emissions testing event is scheduled to be performed by the end of September 2024.

#### STANDARD PROVISIONS

This report addresses the conditions of the subject site during the testing dates only. Accordingly, we assume no responsibility for any changes that may occur subsequent to our testing which could affect the surface emissions at the subject site or adjacent properties.


Landfill Grid



Surface Pathway



# Instantaneous and Component Emissions Monitoring Results

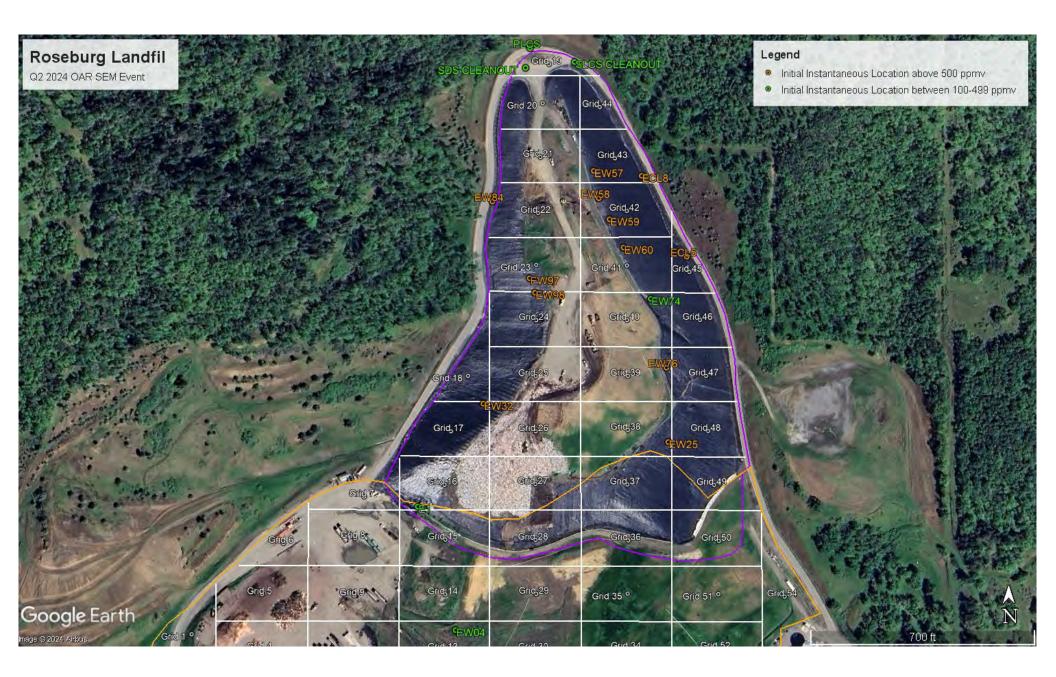

# Instantaneous Data Report for April 8, 9, 16, and May 8, 2024

Location (Surface)	Initial Monitoring Results (ppmv) April 8, 2024	Initial Monitoring Results (ppmv) April 9, 2024	First 10-Day Recheck Monitoring Results (ppmv) April 16, 2024	1-Month Confirmation Monitoring Results (ppmv) May 8, 2024	Latitude	Longitude
EW98	6054	N/A	154	71	43.18934798	-123.382636
EW32	3100	N/A	47	210	43.18840502	-123.383238
EW97	2182	N/A	2	82	43.18947103	-123.382699
EW25	2132	N/A	4	72	43.18807896	-123.381081
EW84	1237	N/A	2	227	43.19012398	-123.383133
EW60	N/A	8522	47	32	43.18973204	-123.381603
ECL5	N/A	3359	26	12	43.18965501	-123.380865
ECL8	N/A	1256	2	126	43.19034199	-123.381391
EW59	N/A	1236	96	76	43.18997202	-123.381765
EW57	N/A	1217	9	5	43.19038399	-123.381951
EW76	N/A	896	31	122	43.18871104	-123.381102
EW58	N/A	507	16	136	43.19015097	-123.381892
E1	394	N/A	N/A	N/A	43.18753003	-123.384002
PLCS	216	N/A	N/A	N/A	43.19137104	-123.382656
SLCS CLEANOUT	180	N/A	N/A	N/A	43.19137397	-123.38261

Location (Surface)	Initial Monitoring Results (ppmv) April 8, 2024	Initial Monitoring Results (ppmv) April 9, 2024	First 10-Day Recheck Monitoring Results (ppmv) April 16, 2024	1-Month Confirmation Monitoring Results (ppmv) May 8, 2024	Latitude	Longitude
SDS CLEANOUT	163	N/A	N/A	N/A	43.191379	-123.38263
EW04	118	N/A	N/A	N/A	43.18648003	-123.383562
EW74	N/A	209	N/A	N/A	43.18929601	-123.381284

## **Pressurized Pipe and Component Results**

Route	Date	Concentration (ppmv)
FLARE STATION	April 9, 2024	5.00

No other exceedances of the 500 ppmv threshold were observed during the second quarter of 2024 monitoring. The highest observed reading was 8,522.0 ppmv.

Integrated Monitoring Results

Point Name	Record Date	FID Concentration (ppm)	Comments
Grid 1			Exempt
Grid 2	4/8/2024	3.03	
Grid 3	4/8/2024	2.77	
Grid 4	4/8/2024	3.30	
Grid 5			Exempt
Grid 6			Exempt
Grid 7			Exempt
Grid 8			Exempt
Grid 9			Exempt
Grid 10	4/8/2024	3.03	
Grid 11	4/8/2024	2.91	
Grid 12	4/8/2024	1.02	
Grid 13	4/8/2024	2.92	
Grid 14			Exempt
Grid 15			Exempt
Grid 16	4/8/2024	0.77	
Grid 17	4/8/2024	1.35	
Grid 18	4/8/2024	0.30	
Grid 19	4/8/2024	3.82	
Grid 20	4/8/2024	3.75	
Grid 21	4/8/2024	6.41	
Grid 22	4/8/2024	2.87	
Grid 23	4/8/2024	1.73	
Grid 24	4/8/2024	1.01	
Grid 25	4/8/2024	1.55	
Grid 26			Exempt
Grid 27			Exempt
Grid 28	4/8/2024	1.05	
Grid 29	4/8/2024	0.70	
Grid 30	4/8/2024	0.62	
Grid 31	4/8/2024	0.77	
Grid 32	4/8/2024	0.63	
Grid 33	4/8/2024	0.28	
Grid 34	4/8/2024	0.46	
Grid 35	4/8/2024	0.64	
Grid 36	4/8/2024	0.00	
Grid 37	4/8/2024	3.52	
Grid 38	4/8/2024	4.50	
Grid 39	4/9/2024	5.21	
Grid 40	4/9/2024	8.46	
Grid 41	4/9/2024	15.32	
Grid 42	4/9/2024	4.47	
Grid 43	4/9/2024	2.52	
Grid 44	4/9/2024	3.40	

Point Name	Record Date	FID Concentration (ppm)	Comments
Grid 45	4/9/2024	11.08	
Grid 46	4/9/2024	3.24	
Grid 47	4/9/2024	1.62	
Grid 48	4/8/2024	0.64	
Grid 49	4/8/2024	0.36	
Grid 50	4/8/2024	0.00	
Grid 51	4/8/2024	0.00	
Grid 52	4/8/2024	0.68	
Grid 53	4/8/2024	0.12	
Grid 54	4/8/2024	0.11	

Calibration Logs

Date:	4/8/2024	_		Site Name:	Coffin Butte Landfill	
WEATHER OBSERV	ATIONS			SCS Employee	Riley Baksic	
Wind Speed:	8	_MPH	Wind Direction:	NW	Barometric Pressure:	30.25
Air Temperature:	49	_deg F		General Weather Conditions:	Sunny	
CALIBRATION INFO	ORMATION					
Pre-monitoring Calibra	tion Precision Check					
Response Time trial #1		5 secon	ds			
Response Time trial #2		5 secon	ds			
Response Time Trial #3	3	6 secon	ds			
Instrument ID:	TVA-202	0160312	10	Cal Gas Concentration:	500	ppm
Trial	Zero Ai	r Reading	2	Cal Gas Reading	(Cal Gas Conc Cal	Gas Reading)
1		0		501	1	
2		0		499	1	
3		0		500	0	
				Average Difference:	0.00	
Calibration Precision = = = = = = = = = = = = = = = = = = =	Average Difference / / / / / / / / / / / / / / / / / / /		as Concentration 500	X 100% X 100%		
Post-monitoring Calibra	ation Check					
Zero Air Reading:	0	_ppm		Cal Gas Reading:	500	ppm
BACKGROUND COM	NCENTRATION CHEC	KS				
Up Wind of landfill are	ea on NW side.			Reading:	0.4	ppm
Downwind SE side of s	ite			Reading:	1.7	ppm
NOTES:						

Date:	4/9/2024			Site Name:	Roseburg Landfill	
WEATHER OBSERV	ATIONS			SCS Employee	Riley Baksic	
Wind Speed:	3	MPH	Wind Direction:	NW	Barometric Pressure:	30.31
Air Temperature:	53	deg F		General Weather Conditions:	Overca	st
CALIBRATION INFO	ORMATION					
Pre-monitoring Calibrat	ion Precision Check					
Response Time trial #1		5 secon	nds			
Response Time trial #2		5 secon	uds			
Response Time Trial #3		6 secon	nds			
Instrument ID:	TVA-202016031210		Cal Gas Concentration:	500	_ppm	
Trial	Zero A	ir Readin	g	Cal Gas Reading	(Cal Gas Conc Ca	Gas Reading)
1		0		499	1	
2		0		500	0	
3		0		501	1	
Calibration Precision = = = =	0	/ Cal G	as Concentration 500	Average Difference: X 100% X 100%	0.00	
Post-monitoring Calibra	ation Check					
Zero Air Reading:	0	_ppm		Cal Gas Reading:	500	_ppm
BACKGROUND CON	CENTRATION CHEC	CKS				
Up Wind of landfill are	ea on NW side.			Reading:	0.9	ppm
Downwind SE side of s	ite			Reading:	2.4	_ppm
NOTES:						

Date:	4/16/2024	_		Site Name:	Roseburg Landfill	
WEATHER OBSERV	ATIONS			SCS Employee	Riley Baksic	
Wind Speed:	9	MPH_	Wind Direction:	NE	Barometric Pressure:	30.42
Air Temperature:	55	_deg F		General Weather Conditions:	Sunny	
CALIBRATION INFO	ORMATION					
Pre-monitoring Calibrat	tion Precision Check					
Response Time trial #1		5 secon	eds			
Response Time trial #2		5 secon	eds			
Response Time Trial #3	}	6 secon	ds			
Instrument ID:	TVA-202	0160312	10	Cal Gas Concentration:	500	ppm
Trial	Zero Ai	r Readin	g	Cal Gas Reading	(Cal Gas Conc Cal	Gas Reading)
1		0		501	1	
2		0		499	1	
3		0		500	0	
				Average Difference:	0.00	
Calibration Precision = = = = = = = = = = = = = = = = = = =	Average Difference / / / / / / / / / / / / / / / / / / /		as Concentration 500	X 100% X 100%		
Post-monitoring Calibra	ation Check					
Zero Air Reading:	0	ppm		Cal Gas Reading:	500	ppm
BACKGROUND CON	NCENTRATION CHEC	KS				
Up Wind of landfill are	ea on NE side.			Reading:	0.3	ppm
Downwind SW side of	site			Reading:	1.7	ppm
NOTES:						

Date:	5/8/2024			Site Name:	Roseburg Landfill	
WEATHER OBSERV	ATIONS			SCS Employee	Riley Baksic	
Wind Speed:	5	MPH	Wind Direction:	N	Barometric Pressure:	30.23
Air Temperature:	51	deg F		General Weather Conditions:	Sunny	,
CALIBRATION INFO	ORMATION					
Pre-monitoring Calibrat	ion Precision Check					
Response Time trial #1		5 secon	ds			
Response Time trial #2		5 secon	ds			
Response Time Trial #3		6 secon	ds			
Instrument ID:	TVA-20	20160312	10	Cal Gas Concentration:	500	_ppm
Trial	Zero A	ir Readin	g	Cal Gas Reading	(Cal Gas Conc Ca	Gas Reading)
1		0		500	0	
2		0		501	1	
3		0		499	1	
				Average Difference:	0.00	
Calibration Precision = = = = = = = = = = = = = = = = = = =	0	/ Cal G / //	as Concentration 500	X 100% X 100%		
Post-monitoring Calibra	tion Check					
Zero Air Reading:	0	ppm		Cal Gas Reading:	500	ppm
BACKGROUND CON	CENTRATION CHEC	CKS				
Up Wind of landfill are	a on N side.			Reading	0.9	ppm
Downwind S side of site	2			Reading	1.6	_ppm
NOTES:						

Weather Data

